

APPROVED: _____


DATE: _____ TITLE: _____


| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 6/2/05 | |
| A | | REDRAWN | 05/08/12 | |
| B | | ADDED 4P DRAWING | 1/30/20 | AY/KL |

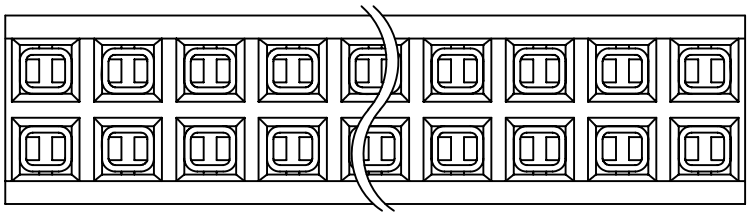


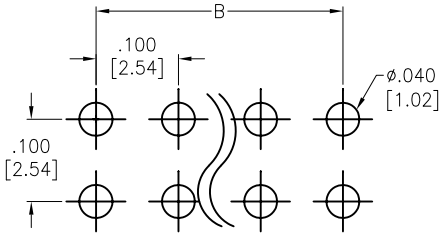


RECOMMENDED PCB LAYOUT

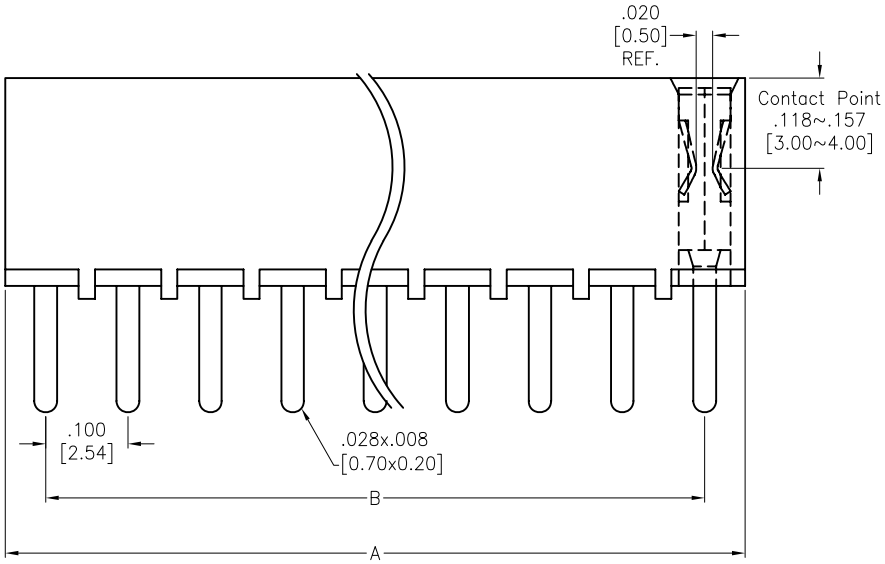

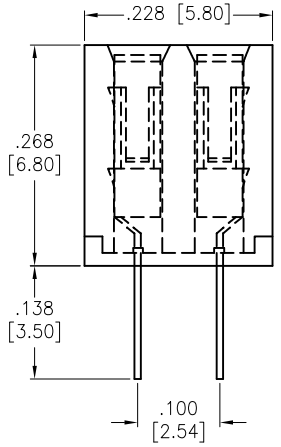
4P

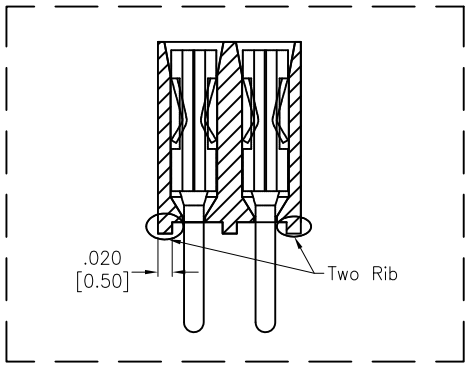SPECIFICATIONS:

Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Current rating: 3 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 600 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 04 thru 60
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | SS | 6/2/05 |
| CHECKED | | |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE
.100 x .100 DUAL ROW RECEPTACLE STRIP
.268 [6.80] HEIGHT, SEL GOLD PLATED

| SIZE | PART NO. | REV. |
|---|---|---|
| X | RS2B-XX-SG | A |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00032T | NTS | 1 OF 1 |