

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/26/09	


APPROVED: _____


DATE: _____ TITLE: _____

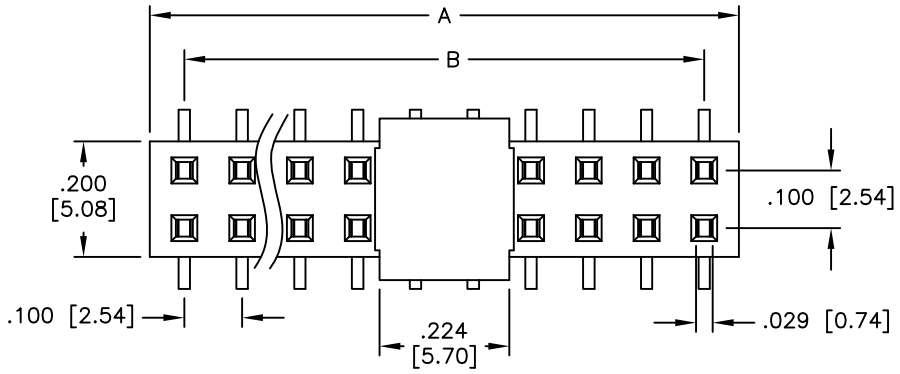


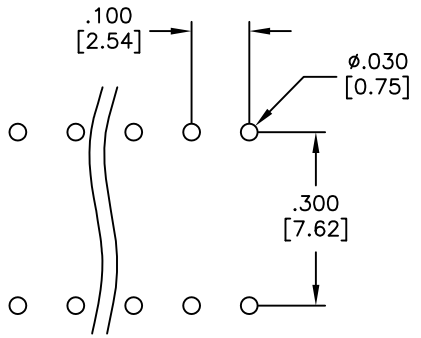

RECOMMENDED PCB LAYOUT
(TOP ENTRY)

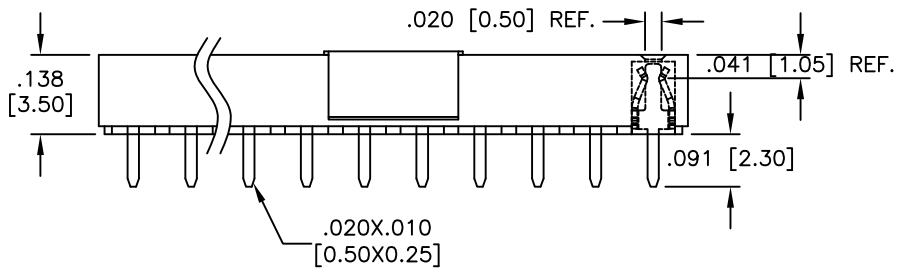



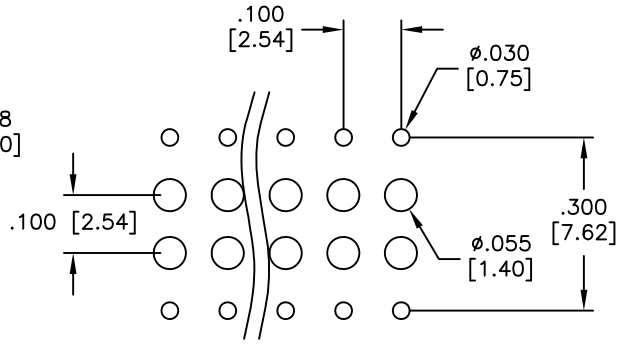

RECOMMENDED PCB LAYOUT
(BOTTOM ENTRY)

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
Material:
Insulator: Nylon 6T, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 600 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.

RoHS COMPLIANT

Positions: 02 thru 40 per row
A = .100 [2.54] X No. of Positions per row + .020 [0.50]
B = .100 [2.54] X No. of Spaces per row

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/26/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 X .100 DUAL ROW RECEPTACLE STRIP LOW PROFILE, GOLD PLATED

SIZE	PART NO.	REV.
X	RS2BE-C-XX-G-LP-HT-PP-T/R	-

REF:	SCALE:	SHEET
S00059T	NTS	1 OF 1