
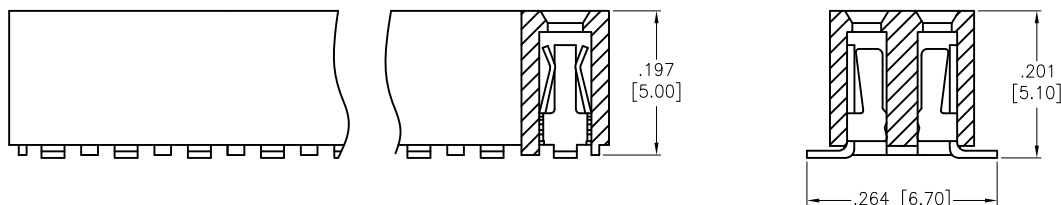
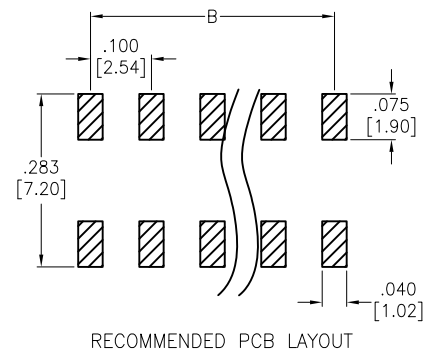


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/1/17	
A		UPDATE DIM.	1/30/18	AY/LW
B		UPDATE DIM.	12/21/18	AY/KC
C		UPDATE DRAWING	9/20/19	OW/DH
D		UPDATE DIM	10/27/22	WX/LW

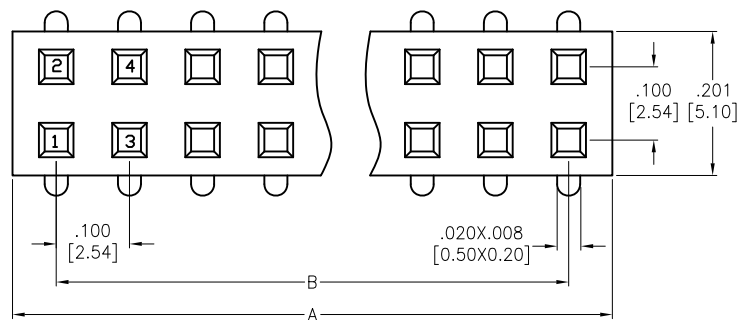

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 4 thru 80

A= .100 [2.54] x No. of Positions Per row + .020 [0.50]

B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	AY	8/1/17
CHECKED	RC	8/1/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 x .100 DUAL ROW RECEPTACLE STRIP
DUAL ENTRY, .197 [5.00] HEIGHT, SMT

SIZE X	PART NO. RS2BEY-XX-G-SMT	REV. D
REF: S00111C	SCALE: NTS	SHEET 1 OF 1