Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/14	
A		UPDATE DRAWING	4/30/20	AY/KC

APPROVED: _____

DATE: _____ TITLE: _____

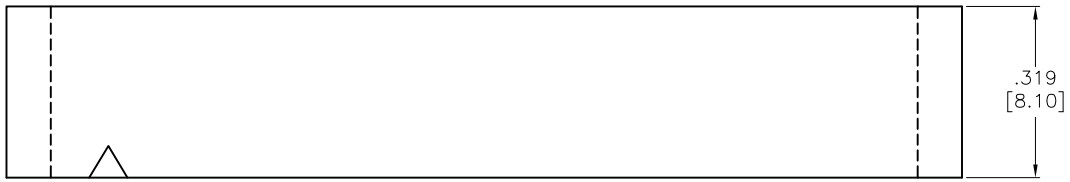



RECOMMENDED PCB LAYOUT

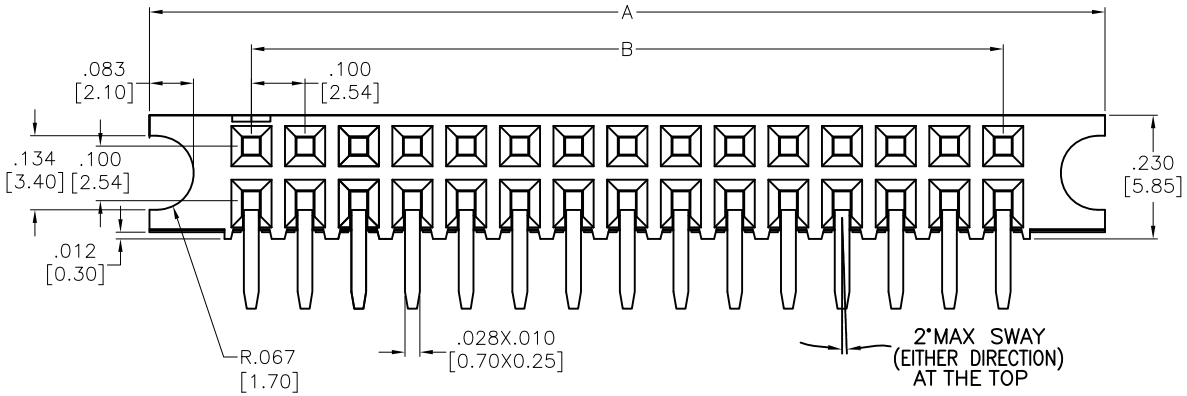

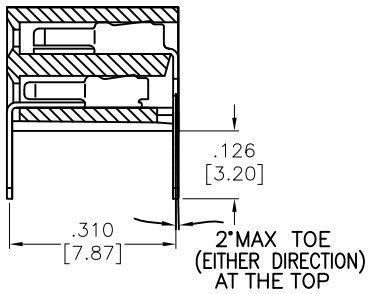

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Current rating: 3 Amp
Contact Resistance: 20 mohms Max.
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 600 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 04 thru 80
A = .100 [2.54] x of Positions per Row + .280 [7.10]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/11/14
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, .100 DUAL ROW SIDE ENTRY, GOLD PLATED, HIGH TEMP

SIZE	PART NO.	REV.
X	RS2BR-XX-G-E-HT	A

REF: S00032T | SCALE: NTS | SHEET 1 OF 1