

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/08	
A		REVISED DIM.	03/19/12	
B		UPDATE DRAWING	11/6/20	LH/KL

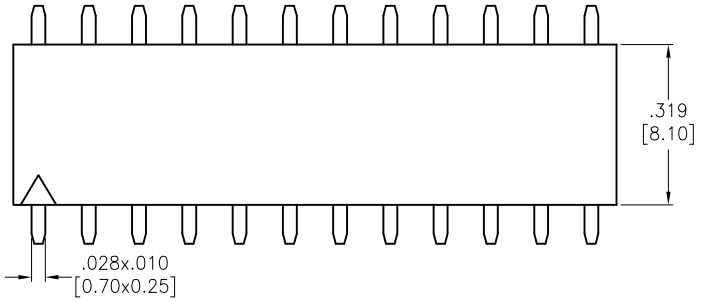

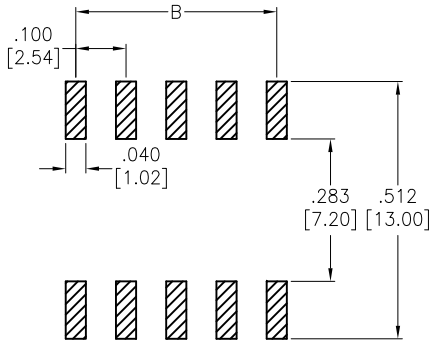

RECOMMENDED PCB LAYOUT

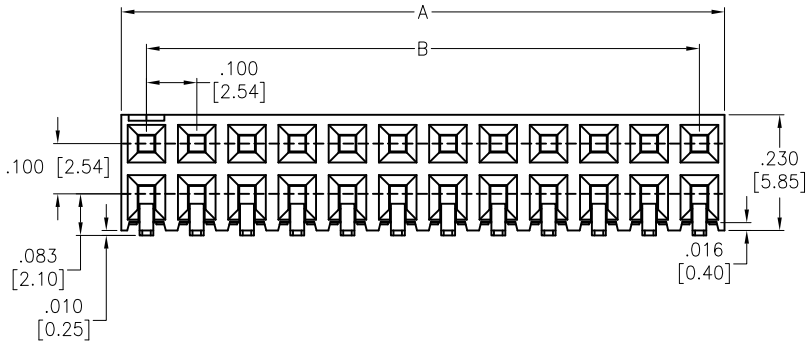

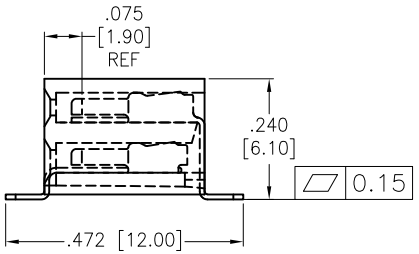

SPECIFICATIONS:

Material:
Insulator: Hi-Temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze

Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on SMT tails

Electrical:
Current rating: 3 Amps max
Contact resistance: 20 mOHMS MAX
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 600 VAC

Temperature Rating:
Operating temperature: -40°C to +105°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A= .100 [2.54] x No. of Positions
B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	2/18/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, .100 DUAL ROW SIDE ENTRY, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	RS2BR-XX-SG-SMT-T/R	B

REF: S00032T | SCALE: NTS | SHEET 1 OF 1