


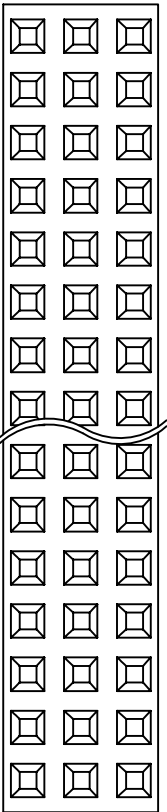


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/16/12	

APPROVED: _____
DATE: _____ TITLE: _____

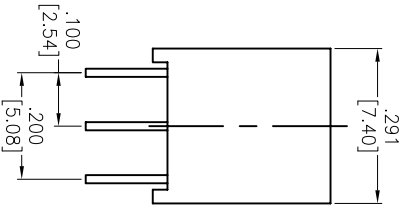

RECOMMENDED PCB LAYOUT

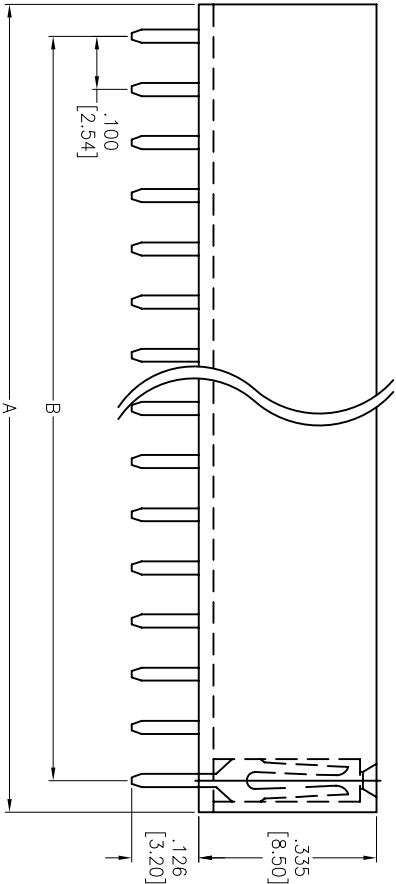

A = .100 [2.54] x No. of Positions per Row + .020 [0.50]
B = .100 [2.54] x No. of Spoces

SPECIFICATIONS:

Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 3 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 600 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH			
INCHES		HOLES		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	.100 x .100 TRIPLE ROW RECEPTACLE STRIP .335 [8.50] HEIGHT, TIN PLATED			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS		DATE		TITLE			
DRAWN	TW	03/16/12		SIZE PART NO.			
CHECKED	AY	03/16/12		X RS3-XX-T			
APPROVED				REF: S00032T SCALE: NTS SHEET 1 OF 1			