
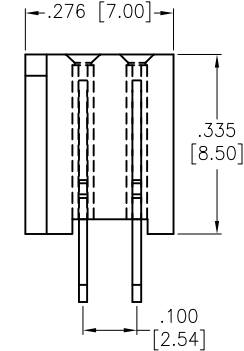
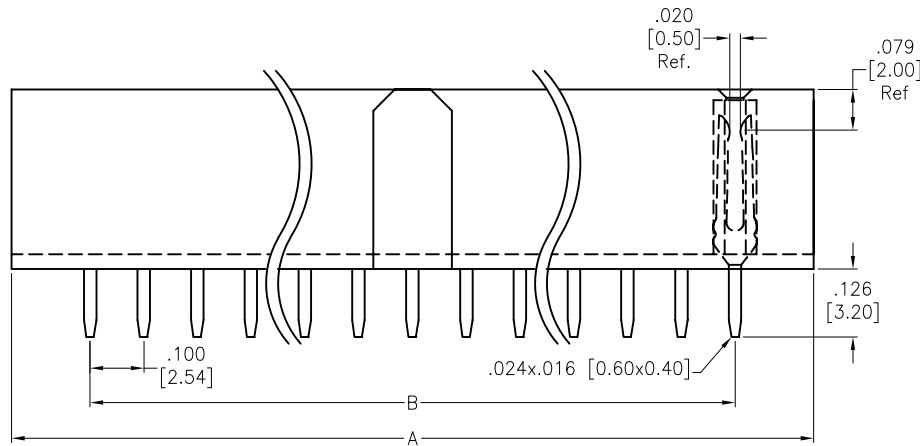
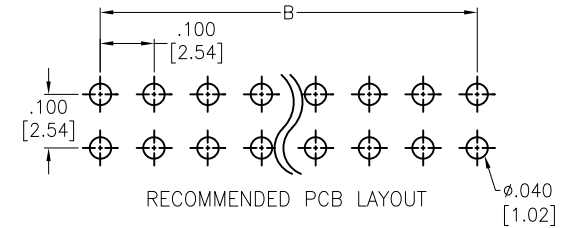


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/05	
A		REVISED SPEC.	12/24/10	
B		REVISED SPEC.	05/18/12	
C		UPDATE DRAWING	7/20/18	AY/DH
D		UPDATE SPEC.	7/13/21	WX/KL

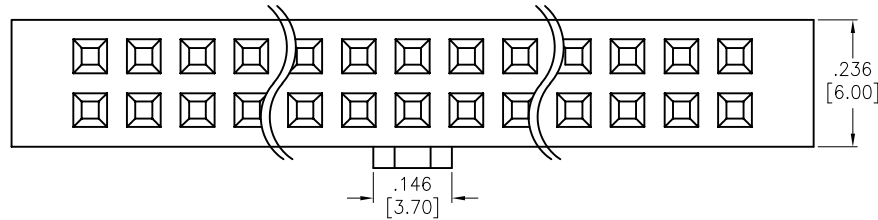

SPECIFICATIONS:

Material: 
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 600 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant 

Positions: 06 thru 72

A = .100 [2.54] x No. of Positions per Row + .192 [4.88]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	SS	6/1/05
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .100 x .100 DUAL ROW RECEPTACLE STRIP
.335 [8.50] HEIGHT, KEYED CORNER CONTACTS

SIZE X PART NO. RSB-XX-G REV. D

REF: S00032T SCALE: NTS SHEET 1 OF 1