


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/7/12	
A		UPDATE DRAWING	7/20/18	AY/DH
B		UPDATE SPEC.	7/13/21	WX/KL

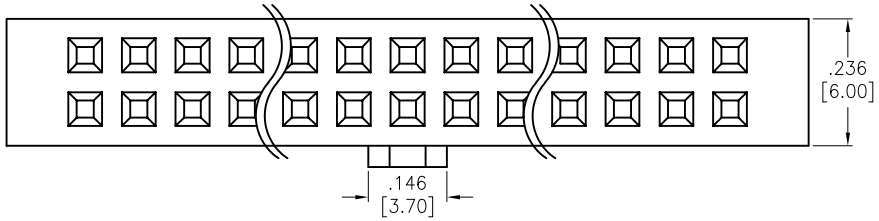

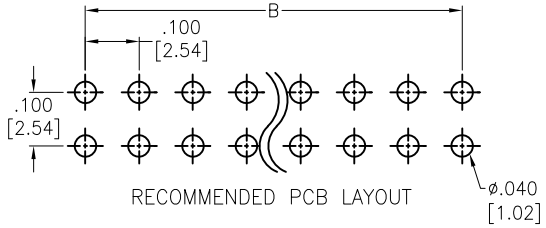

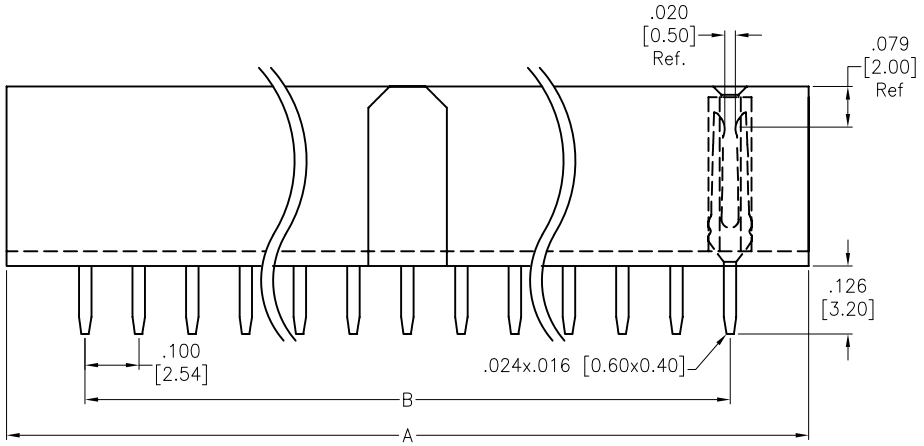

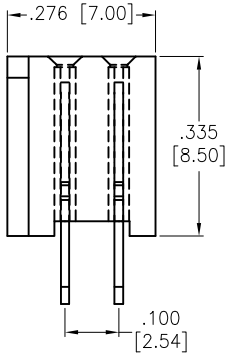

SPECIFICATIONS:
Material: B
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails
Electrical:
Current rating: 3 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 600 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 06 thru 72
A = .100 [2.54] x No. of Positions per Row + .192 [4.88]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	3/7/12
CHECKED	AH	3/7/12
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 x .100 DUAL ROW RECEPTACLE STRIP
.335 [8.50] HEIGHT, KEYED CORNER CONTACTS

SIZE	PART NO.	REV.
X	RSB-XX-SG	B

REF:	SCALE:	SHEET
S00032T	NTS	1 OF 1