

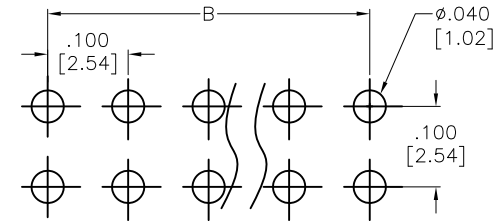
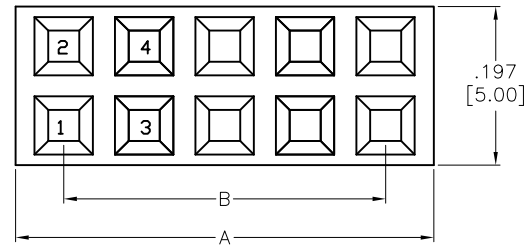


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/21/18	

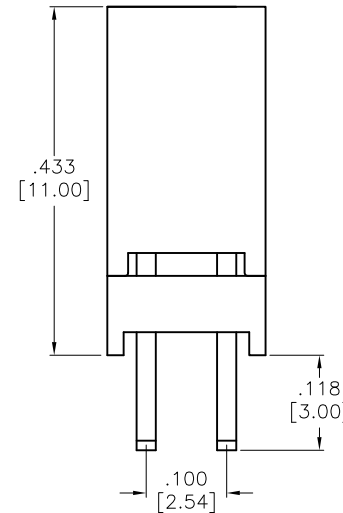

RECOMMENDED PCB LAYOUT

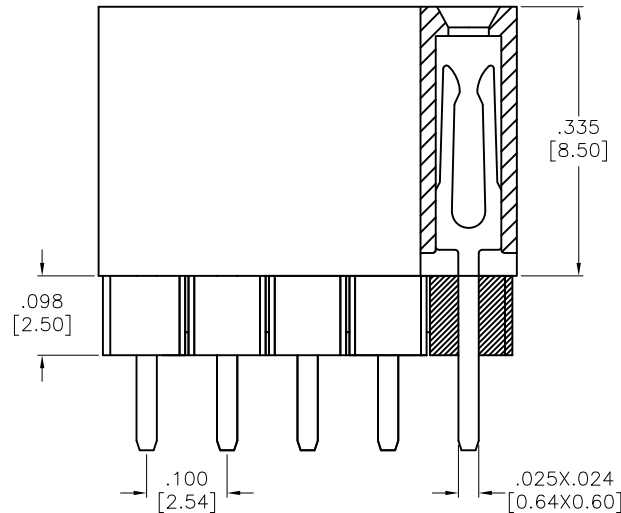

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 04 thru 80

A = .100 [2.54] x No. of Positions per Row +.020 [0.50]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	Ø.X ± .10	TITLE		.100 x .100 DUAL ROW RECEPTACLE STRIP	
.XX ± .020	Ø.XX ± .015	APPROVALS		.335 [8.50] HEIGHT, GOLD PLATED	
.XXX ± .015	Ø.XXX ± .010	DATE		SIZE X PART NO.	
DRAWN AY	11/21/18	CHECKED TY		RSE2-1-XX-G-1-HT	
APPROVED		REV.		-	
REF: S00111C		SCALE: NTS		SHEET 1 OF 1	