
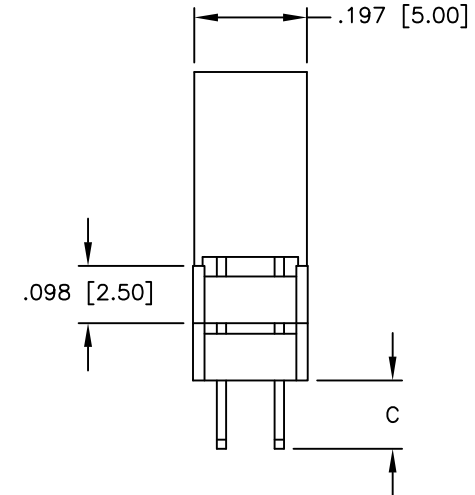
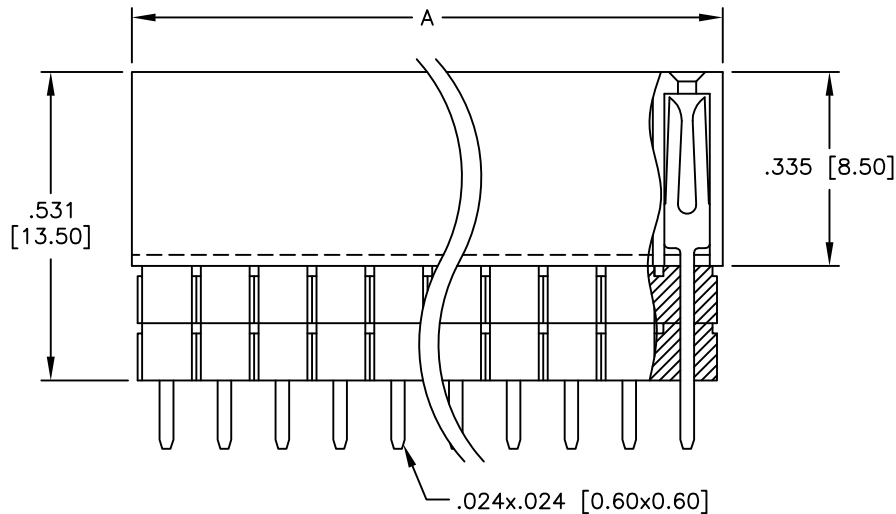
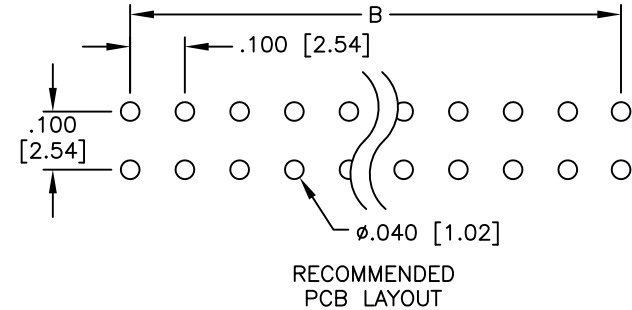


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	
A		ADDED -3	01/29/07	
B		REVISED DIM.	4/2/14	HR/AY
C		REVISED TAIL DIM. FOR RSE2-2-XX-SG-3	1/7/19	SS

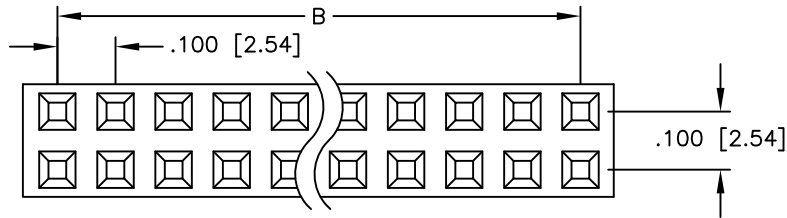

SPECIFICATIONS:

Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails
Electrical:
Current rating: 3 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant



PART NUMBER	DIMENSION
	C
RSE2-2-XX-SG-1	.216 [5.50]
RSE2-2-XX-SG-3	.118 [3.00]

Positions: 02 thru 80

A = .100 [2.54] x No. of Positions per Row + .020 [0.50]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE .100 x .100 DUAL ROW RECEPTACLE STRIP ELEVATED SOCKET, 2 INSULATORS	
APPROVALS		DATE	
DRAWN	SS	6/2/05	
CHECKED			
APPROVED			
SIZE X	PART NO. RSE2-2-XX-SG-X	REV. C	
REF:		SCALE: NTS	SHEET 1 OF 1