



APPROVED: _____

DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-	-	RELEASED	6/7/18	

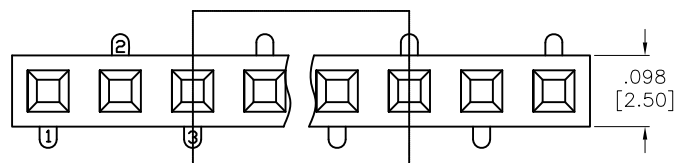

RSM1-C-XX-G-SMT-B-PP-T/R

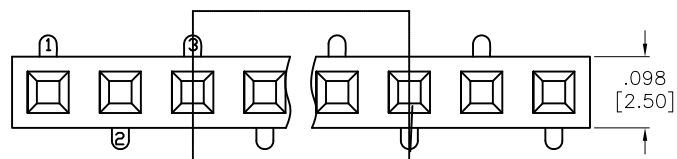


RSM1-C-XX-G-SMT-A-PP-T/R

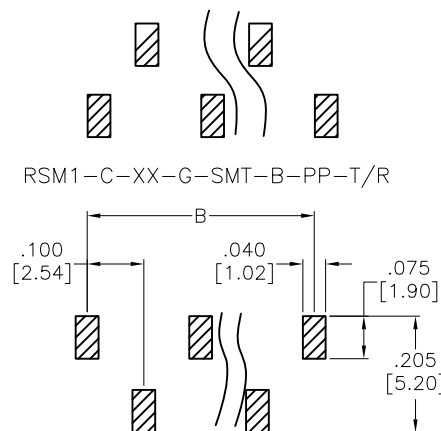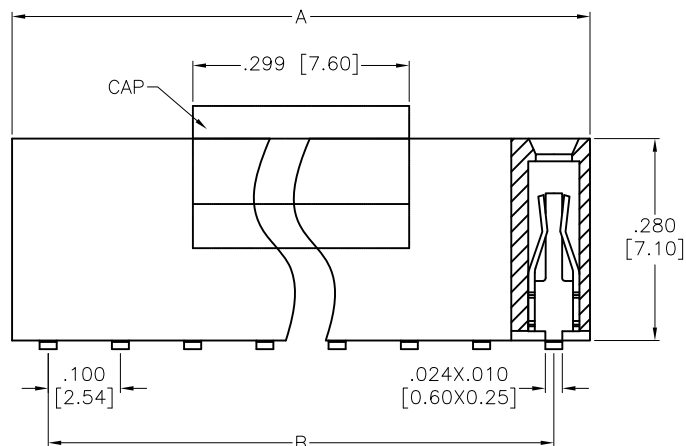

RSM1-C-XX-G-SMT-A-PP-T/R

RECOMMENDED PCB LAYOUT

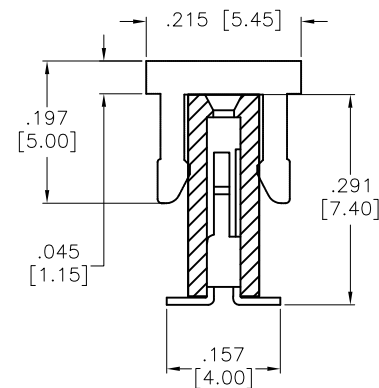

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 01 thru 40

A= .100 [2.54] x No. of Positions + .012 [0.30]

B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	6/7/18
CHECKED	DH	6/7/18
APPROVED		

ADAM TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] SINGLE ROW RECEPTACLE STRIP, SMT
.280 [7.10] HEIGHT, TYPE A & B, W/CAP

SIZE	PART NO.	REV.
X	RSM1-C-XX-G-SMT-X-PP-T/R	-
REF:	S00111C	SCALE: NTS
SHEET 1 OF 1		