

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/11/18	


APPROVED: _____


DATE: _____ TITLE: _____

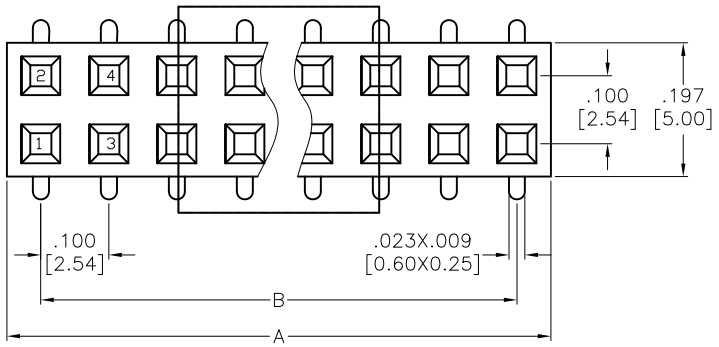

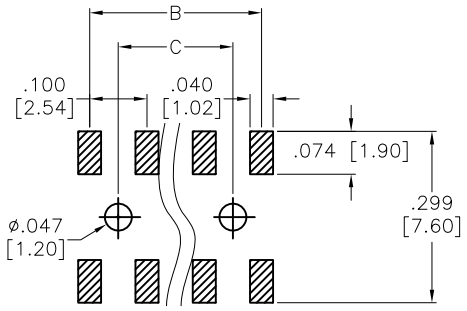

RECOMMENDED PCB LAYOUT

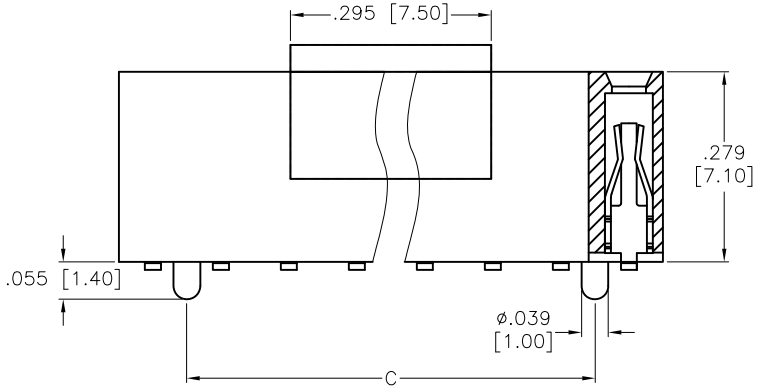

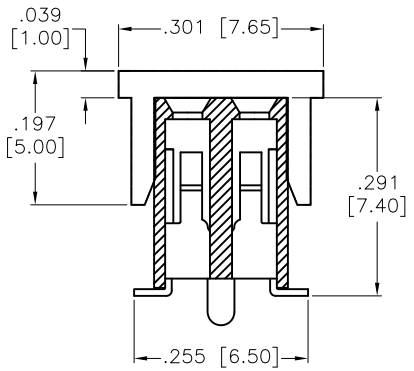

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A=.100 [2.54] X No. of Positions Per row + .012 [0.30]
B=.100 [2.54] X No. of Spaces
C=.100 [2.54] X No. of Positions Per row – .200 [5.08]

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Rated Current: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
–40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	10/11/18
CHECKED	LW	10/11/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 X .100 DUAL ROW FEMALE HEADER SMT, GOLD PLATED, W/ PEG

SIZE	PART NO.	REV.
X	RSM2-C-XX-G-SMT-P-PP-T/R	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1