

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/31/05	
A		REDRAWN	6/30/10	
B		REDRAWN	10/6/11	

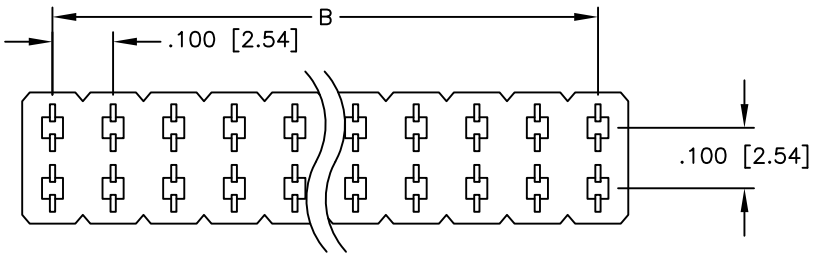

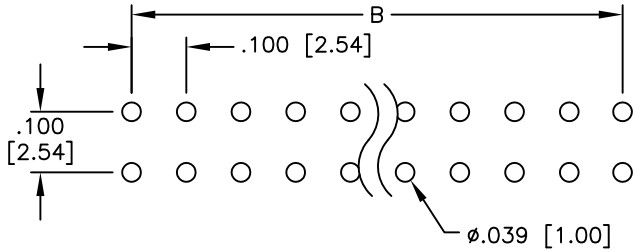

RECOMMENDED
PCB LAYOUT

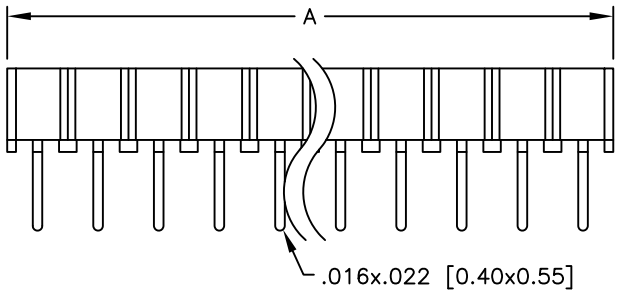

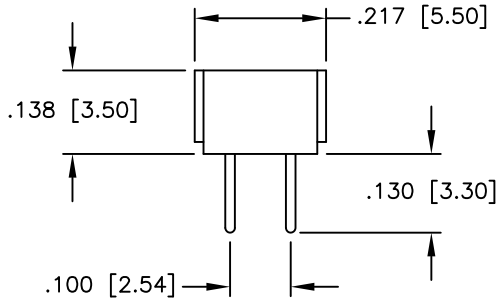

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Black
Contacts: Copper alloy
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 1 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 3,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

Positions: 04 thru 80
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/31/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 x .100 DUAL ROW RECEPTACLE STRIP
VERY LOW PROFILE, .138 [3.50] HEIGHT

SIZE	PART NO.	REV.
X	RSVL-2A-XX-G	B

REF:	SCALE:	SHEET
S00099T	NTS	1 OF 1