

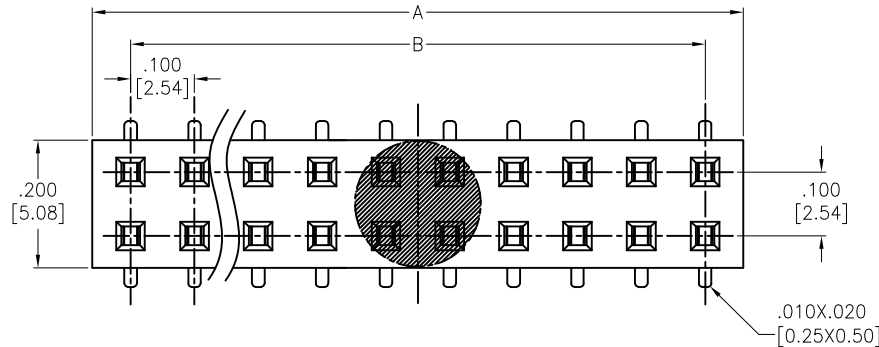
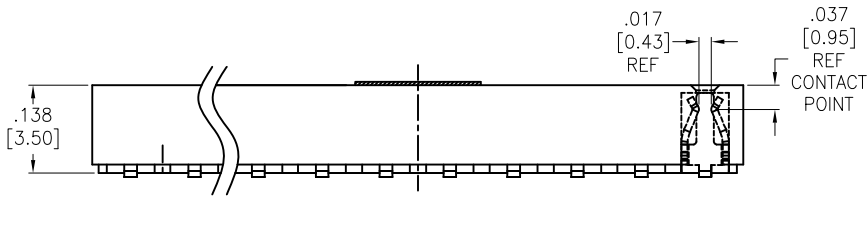


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	06/27/12	
A		UPDATE DRAWING	7/10/20	OW/KL

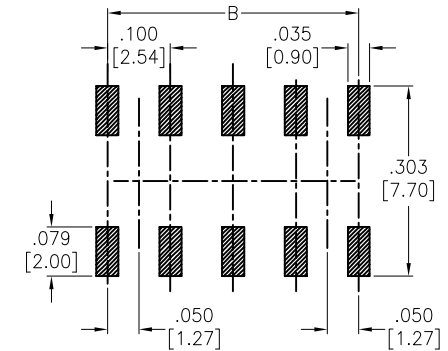

RECOMMENDED PCB LAYOUT
(TOP ENTRY)

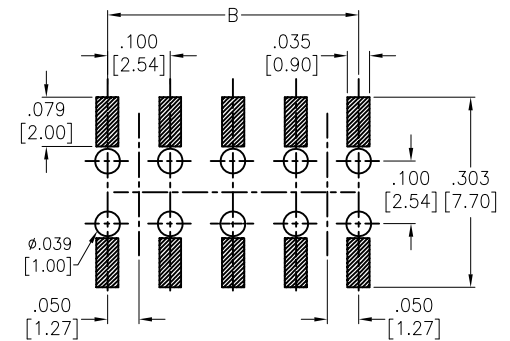

RECOMMENDED PCB LAYOUT
(BOTTOM ENTRY)

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on tails
 Electrical:
 Current rating: 3 Amp.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 600 VAC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .100 [2.54] x No. of Positions per Row + .020 [0.50]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN	TW	06/27/12	
CHECKED	AY	06/27/12	
APPROVED			
TITLE		.100 x .100 DUAL ROW RECEPTACLE STRIP .138 [3.50] HEIGHT, SEL GOLD PLATED	
SIZE	PART NO.	REV.	
X	RSVL-2C-XX-SG-SMT-KT-T/R	A	
REF:	S00032T	SCALE:	NTS
		SHEET 1 OF 1	