
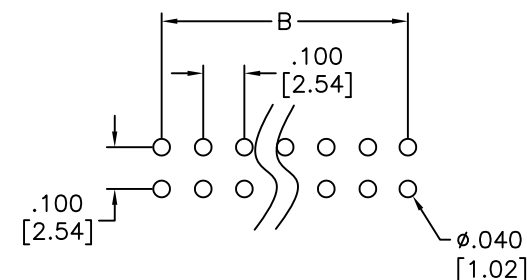

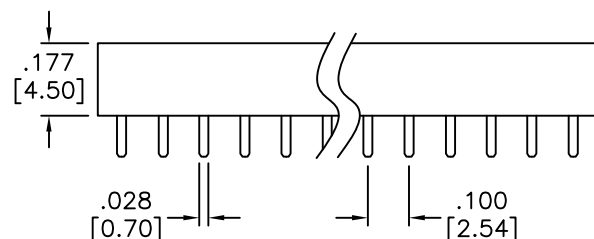


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/30/12	
A		UPDATE DIM.	4/6/20	AY/EY

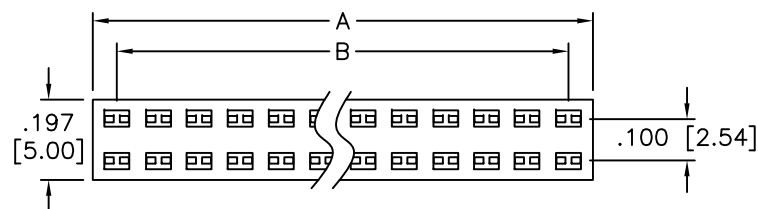

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 1 Amp.
 Contact resistance: 30 mohms max
 Insulation resistance: 3,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 04 thru 52

A = .100 [2.54] x No. of Positions per Row + .020 [0.50]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			DATE		TITLE .100 x .100 DUAL ROW RECEPTACLE STRIP VERY LOW PROFILE, .177 [4.50] HEIGHT	
DRAWN		AY	7/30/12			
CHECKED		LW	7/30/12			
APPROVED						
REF: S00099T			SCALE: NTS		SHEET 1 OF 1	