


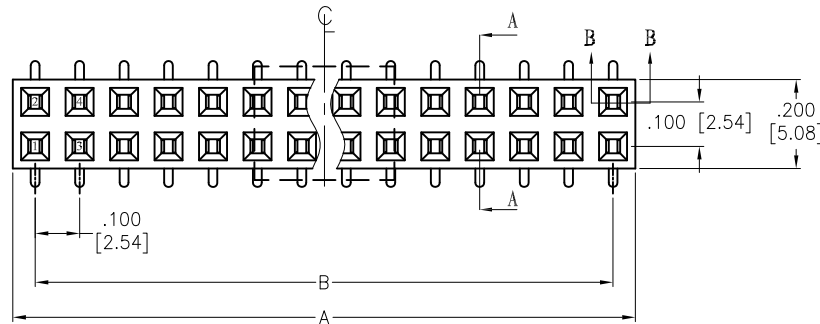


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/19/16	

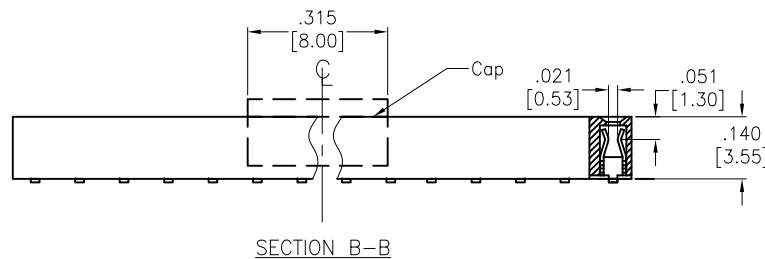

SPECIAL CAP FOR 04P-08P

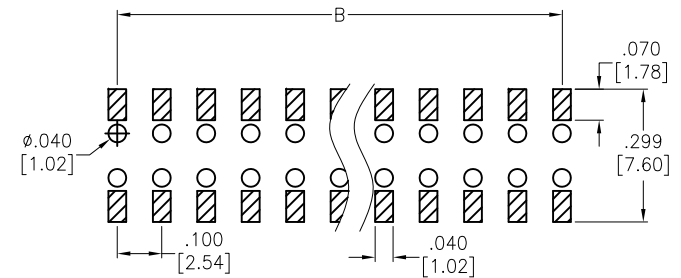

RECOMMENDED PCB LAYOUT

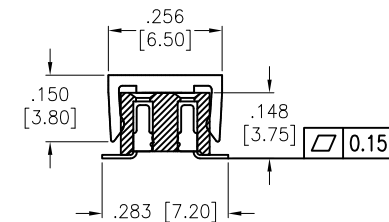

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on tails.

Electrical:

Current rating: 3.0 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC/DC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .100 [2.54] x No. of Positions per Row

B = .100 [2.54] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	9/19/16
CHECKED	CT	9/19/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 RECEPTACLE STRIP, VERY LOW PROFILE,
 DUAL ROW, SURFACE MOUNT

SIZE	PART NO.	REV.
X	RSVL-2F-XX-SG-SMT-PP-T/R	-
REF: S00019C	SCALE: NTS	SHEET 1 OF 1