

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/28/14	
A		ADDED DIM.	12/11/15	HR/CT
B		REVISED DIM.	1/11/16	HR




SPECIAL CAP FOR 04P-08P

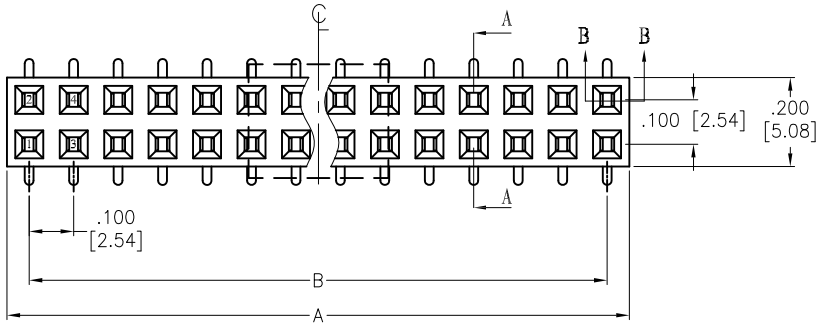


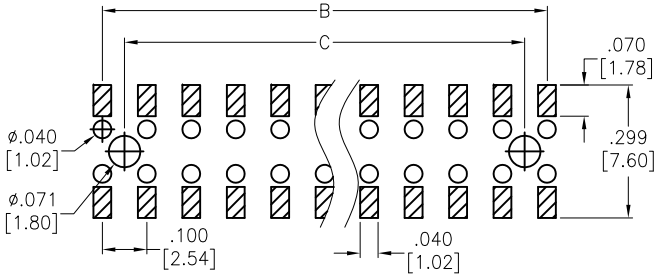

RECOMMENDED PCB LAYOUT

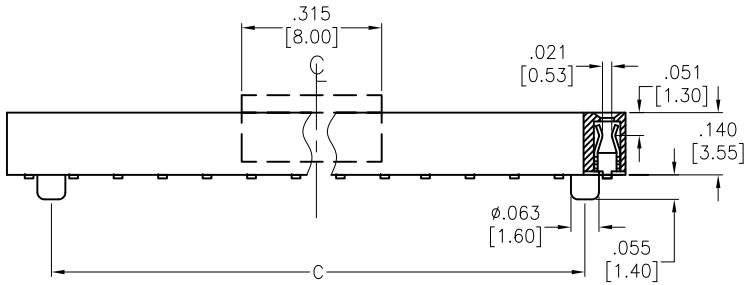

SECTION B-B

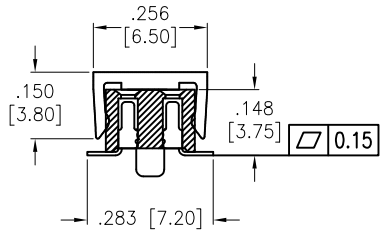

SECTION A-A

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 3.0 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 1,000 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Space
C = .100 [2.54] x No. of Space - .100 [2.54]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	11/28/14
CHECKED	GC	11/28/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, VERY LOW PROFILE, DUAL ROW, SURFACE MOUNT

SIZE	PART NO.	REV.
X	RSVL-2F-XX-T-SMT-P-PP-T/R	B

REF: S00019C | SCALE: NTS | SHEET 1 OF 1