APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/3/19	
A		UPDATED DIM.	5/23/23	JJ/KL

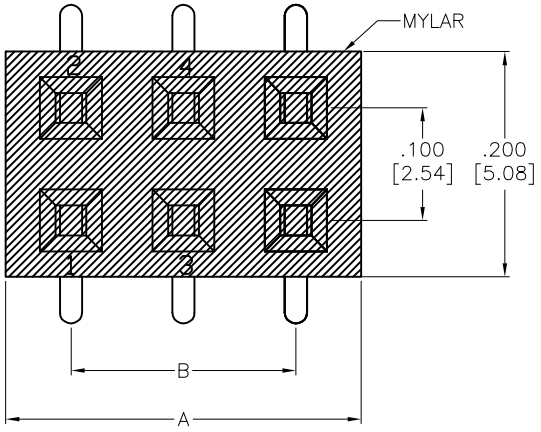

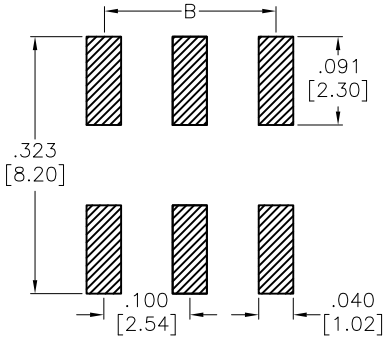

RECOMMENDED PCB LAYOUT

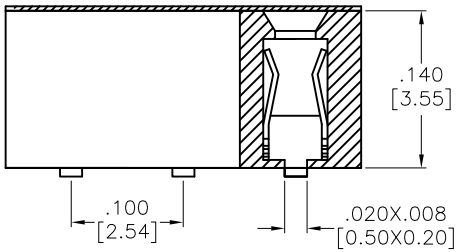

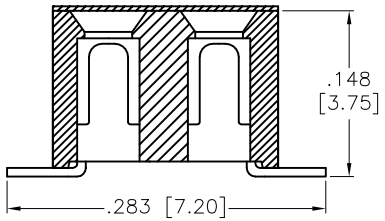

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A = .100 [2.54] x No. of Positions Per row + .016 [0.40]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	6/3/19
CHECKED	IL	6/3/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, VERY LOW PROFILE, DUAL ROW, SURFACE MOUNT

SIZE	PART NO.	REV.
X	RSVL-2FY-XX-G-SMT-KT-T/R	A

REF: S00111C | SCALE: NTS | SHEET 1 OF 1