

6

5

4

3





2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/18/21	

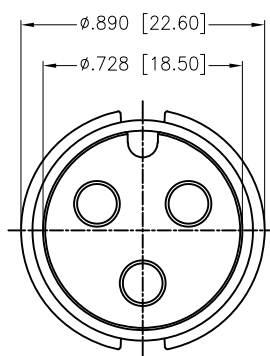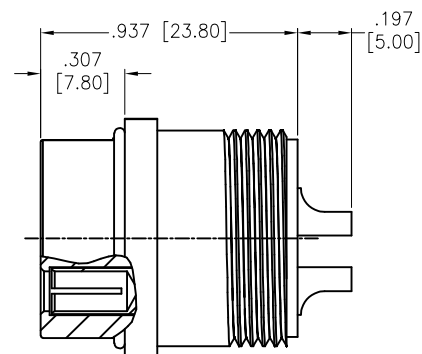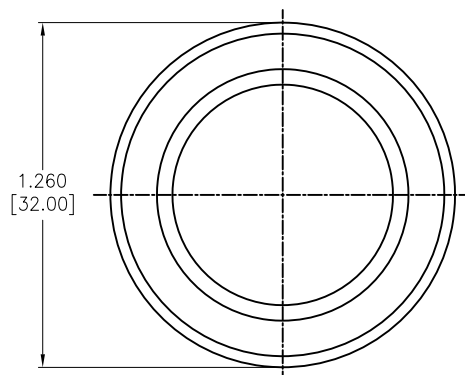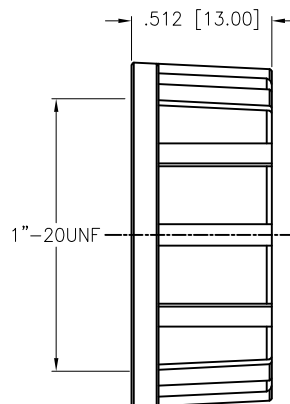

SCREW NUT

SD-CD03-FFBDL-SX0-000

7=IP67

SPECIFICATIONS:

Material:

Housing: PA66, rated UL 94V-0

Contacts: Brass, Gold flash plated

O-Ring: Silicone

Screw Nut: PA66

Electrical:

Rated current: 30A

Rated voltage: 360V

Temperature Rating:

Operating temperature: -20°C to +80°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	OW	1/18/21
CHECKED	KC	1/18/21
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
WATERPROOF CONNECTOR, FEMALE,
D-SIZE, FIELD INSTALL, LOCK TYPE

SIZE X	PART NO. SD-CD03-FFBDL-SX0-000	REV. -
REF: S00298T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1