


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/14/12	


APPROVED: _____


DATE: _____ TITLE: _____

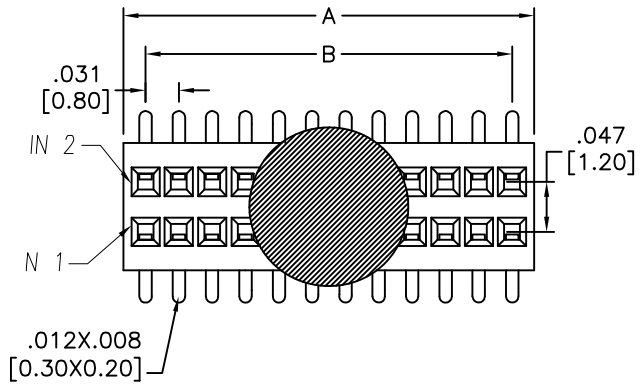



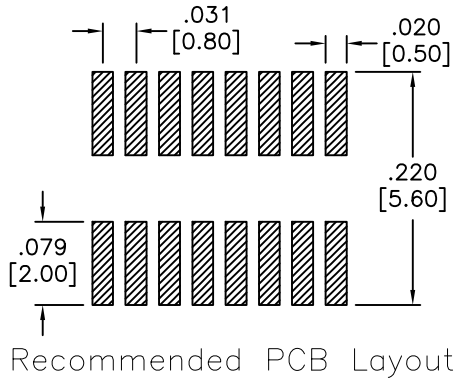

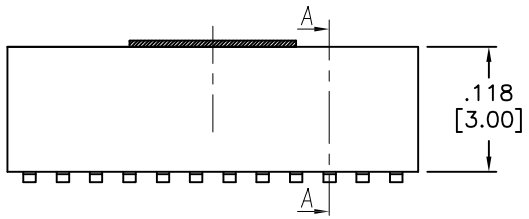



SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 0.5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 200 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 6 thru 100
A = .031 [0.80] x No. of Positions Per Row + .010 [0.26]
B = .031 [0.80] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/14/12
CHECKED	CC	2/14/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 0.80MM X 1.20MMFEMALE HEADER SMT, DUAL ROW, NO PEG

SIZE	PART NO.	REV.
X	SRS2-XX-U-SMT-NP-KT-T/R	-

REF: S00032T | SCALE: NTS | SHEET 1 OF 1