

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/25/22	


APPROVED: _____

DATE: _____ TITLE: _____

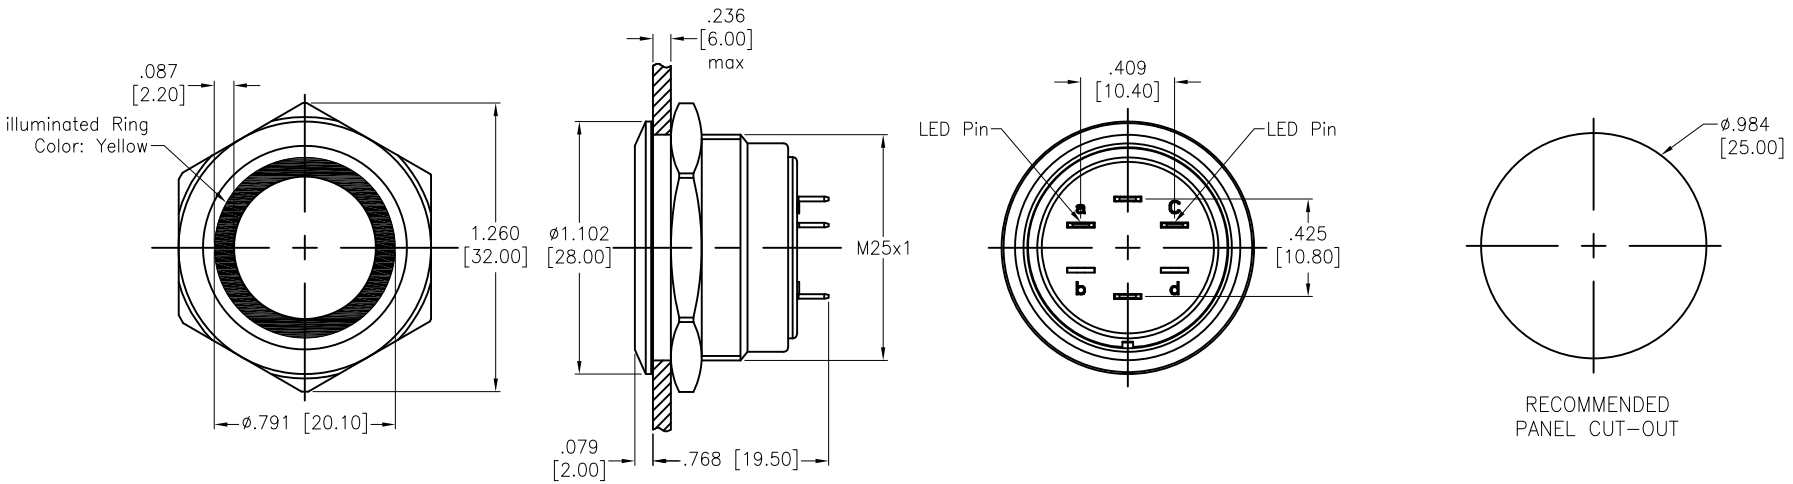



O-RING



CIRCUIT DIAGRAM
(SPST) OFF-MOM

SPECIFICATIONS:

Material:
Body: PA, Rated UL94V-0
Button: Stainless Steel
Contact Material: Silver Alloy, (2.8x0.5mm)

Electrical:
LED Voltage: 1.8V, Color: Yellow
Switch Rating: 2A @ 36V DC
Contact resistance: 50 mΩ max.
Insulation resistance: 1000M ohms min @ 500V DC.
Dielectric withstanding voltage: 1500V RMS, 50Hz.
Electrical Life: 50,000 cycles min

Mechanical:
Operating Force: 4.5N
Operating Travel: 2.3mm
Nut Torque: 0.8Nm max.

Temperature Rating:
Operating temperature: -25°C to +55°C

Environmental:
IP67 Front Panel Protection
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	4/25/22
CHECKED	TY	4/25/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SWITCH, ANTI-VANDAL, PUSH BUTTON, SPST, 25mm, LIGHTED RING, OFF-MOM, SHORT BODY

SIZE	PART NO.	REV.
X	SW-PB7-01LB5CFRY1.8VMS	-

REF: S00198T | SCALE: NTS | SHEET 1 OF 1