


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	
A		UPDATED WIRE RANGE	10/15/10	
B		REDRAWN	3/14/12	

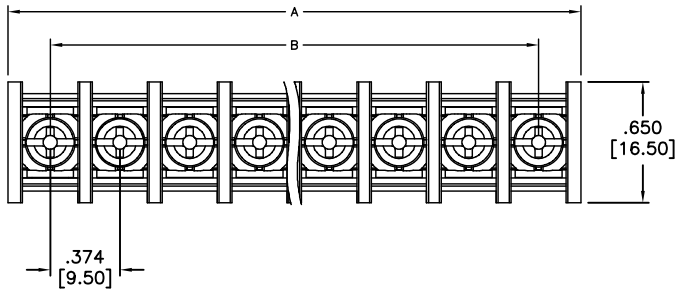


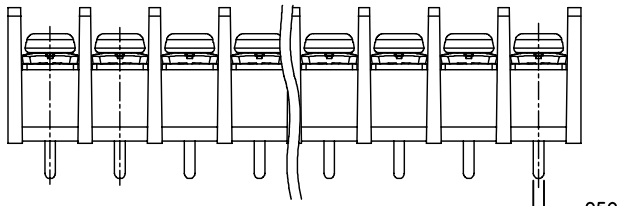

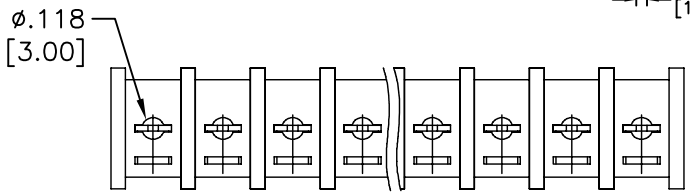

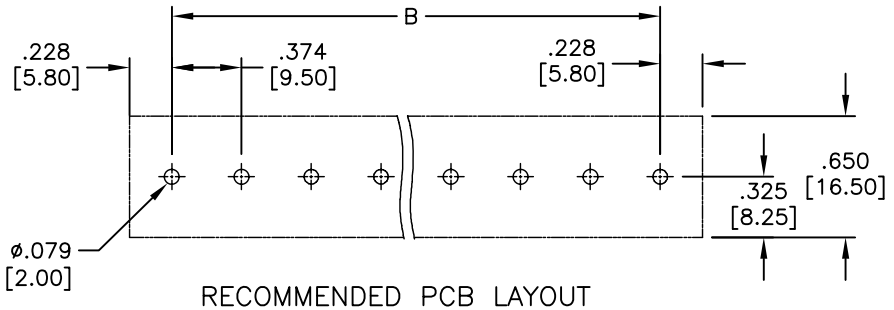

RECOMMENDED PCB LAYOUT

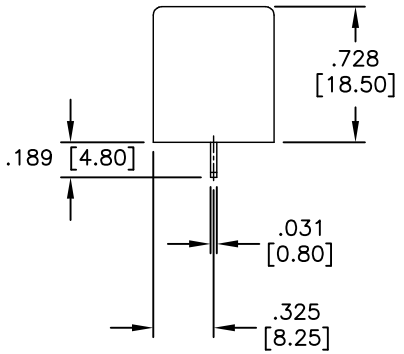

SPECIFICATIONS:
Material:
nsulator: Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Barss
Screw: M3.5, Steel, Nickel plated
Plating:
Tin over Copper underplate overall
Electrical:
Operation voltage: 300 VAC
Current rating: 30 Amps
Mechanical:
Wire Range: 10-22 Awg
Screw Torque Value: 8.8 Lb-In
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

Positions: 2 thru 30
A = .374 [9.50] x No. of Positions + .079 [2.00]
B = .374 [9.50] x No. of Spaces

	Tolerance
2-4P	±.008 [0.20]
6-12P	±.012 [0.30]
13-19P	±.020 [0.50]
20-25P	±.024 [0.60]
13-19P	±.031 [0.80]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/8/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.374 [9.50] CENTERLINE BARRIER BLOCK
VERTICAL, PCB TAILS, BARRIER ENDS

SIZE	PART NO.	REV.
X	TBF-XX-01-B	B

REF: S00007T | SCALE: NTS | SHEET 1 OF 1