
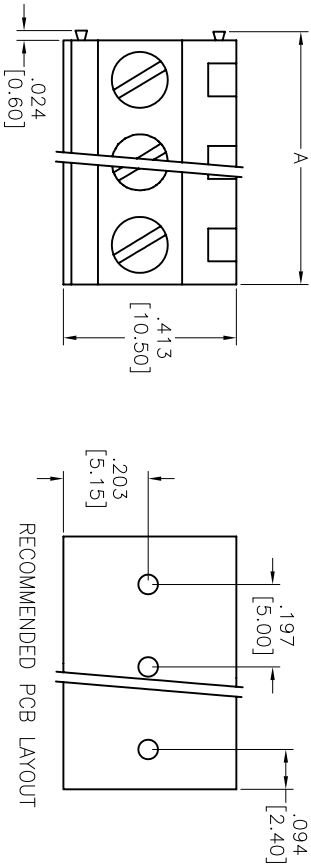


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		Preliminary	3/19/01	
A		REDRAWN	1/12/12	

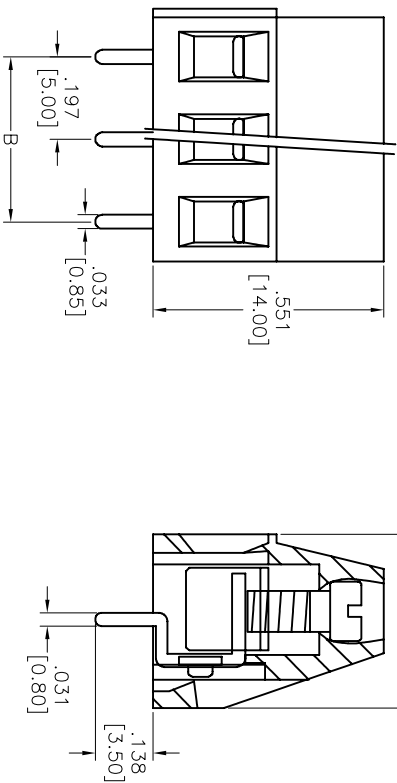

SPECIFICATIONS:

Material:
Insulator: Polyamide 66, rated UL 94V-0
Insulator color: Green
Contact: Brass, Tin plated
Wire Protector: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 250 VAC
Current rating: 10 Amps
Insulation resistance: 1,000 Mohms @ 500VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire range: 16-22 AWG
Screws Torque(In-Lb): 3.5
Temperature Rating:
Operating temperature: -55°C to +100°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

Positions: 2 thru 26
A= .197 [5.00] x No. of Positions + .024 [0.60]
B= .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HILES		TITLE			
.X	± .10	ØX	± .10	TERMINAL BLOCK, .200 [5.00] PITCH			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS		DATE					
DRAWN	WGM	3/19/01					
CHECKED				SIZE			
APPROVED				PART NO.			
				TSB-XX			
				REV. A			
REF:	S00036T	SCALE:	NTS	SHEET	1	OF	1