



## QL - Series Miniature Circuit Breakers



Dual Mount  
1 pole

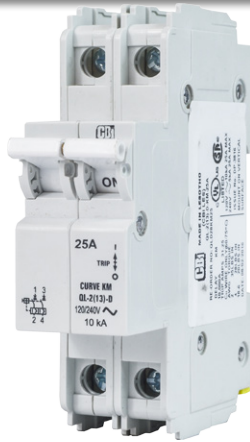

DIN Mount  
2 pole

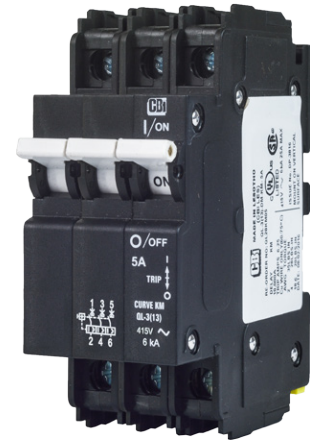

Dual Mount  
3 pole

### Features

- AC circuit breaker
- Hydraulic-magnetic technology
- 100% rating capability, independent of ambient temperature
- One, two and three pole (UL). One, two, three pole and 1+N, 3+N (VDE).
- VDE, EAC and CCC approved, CE certified
- UL listed (CSA / UL 489)
- Ratings 0.1 to 25 A
- Optional shunt trip (approvals pending)
- Wide range of time delays and operating currents
- Precision tripping characteristics
- Ultra compact – 13 mm wide module
- Trip indication with mid-trip handle
- Reset immediately after overload
- DIN mount product in grey shells
- Dual mount product in black shells
- Current limiting capability
- Ring terminal ready (terminal screw is removable)
- Suitable to use for electrical isolation

### Auxiliary Switch, Trip Alarm & Combo:

#### Features

- Auxiliary switch (DIN and Dual Mount)
- Auxiliary switch + trip alarm (Dual Mount only)
- Trip alarm (Dual Mount only)
- AC and DC voltages
- UL 489 listed (auxiliary switch: 6 A 250 V AC, 0.5 A 80 V DC)
- IEC 60947-5-1 approved (auxiliary switch: 6 A 240 V AC, 0.5 A 110 V DC; trip alarm: 6 A 240 V AC, 0.5 A 110 V DC)
- Factory fitted
- Attached to right hand side of circuit breaker
- Compact 6.5 mm width

### Applications

- AC branch circuit protection (UL 489, IEC / EN 60847-2)
- Telecom / datacom equipment
- Lighting control
- UPS equipment
- Alternative energy equipment
- Mobile power generation equipment
- Power conditioning equipment

### Optional Accessories

- Handle lock
- Surface mounting clips
- Busbar
- 57 mm escutcheon blank (Dual Mount only)
- 57 mm safety blank (Dual Mount only)

### Approvals



(IEC / EN 60947-2)



US (UL 489)



## QL - Series Miniature Circuit Breakers

### Technical Data

Product Type	Circuit Breaker				
Approvals	IEC / EN 60947-2, VDE, CE, EAC				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240 V AC		415 V AC		
Minimum Current Rating	0.1 A				
Maximum Current Rating	25 A				
Specific Ratings (Verify Certification)	0.1, 0.2, 0.3, 0.4, 0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 16, 20, 25 A				
Interrupting Capacity	6 kA				

Product Type	Circuit Breaker			
Approvals	UL 489			
Number of Poles	1	1	2	3
Operating Voltages	120 V AC	240 V AC	120 / 240 V AC	240 V AC
Minimum Current Rating	0.1 A			
Maximum Current Rating	25 A	20 A	25 A	25 A
Specific Ratings (Verify Certification)	0.1, 0.2, 0.3, 0.4, 0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 16, 20, 25 A			
Interrupting Capacity	10 kA	5 kA	10 kA	5 kA

Product Type	Circuit Breaker		
Approvals	CCC		
Number of Poles	1	2 (1+N)	2
Operating Voltages	240 V AC	240 V AC	240 V AC
Minimum Current Rating	0.1 A		
Maximum Current Rating	25 A	25 A	25 A
Specific Ratings (Verify Certification)	0.1, 0.2, 0.3, 0.4, 0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 16, 20, 25 A		
Interrupting Capacity	6 kA		

## QL - Series Miniature Circuit Breakers

### Technical Data

<b>Product Type</b>	QL
<b>Operating Temperature Range</b>	-40 °C to +85 °C
<b>Mounting Options</b>	DIN Rail, Dual mounting (DIN & Mini), surface mounting clip
<b>Time Delay Curves</b>	1, 3, 9, KM, OP
<b>Endurance</b>	10000 operations - 1500 electrical at rated current and voltage (IEC 60947-2) 6000 electrical operations (UL 489)
<b>Dielectric Strength</b>	1480V (single pole) / 1830V (multi pole), 50 Hz for one minute after testing
<b>Weight</b>	102 g per pole, 160 g with auxiliary (unpacked)
<b>Humidity</b>	35 to 85% relative
<b>Altitude</b>	Certification tests done at altitude ≈ 2000 metres. Will operate at higher altitudes.
<b>Shock</b>	16 G (IEC 60068-2-27)
<b>Vibration</b>	2 G (IEC 60068-2-6) (sinusoidal wave)
<b>Flammability</b>	I3 - Ignition does not persist at 850 °C after glow wire is withdrawn with an oxygen index of ≥ 28
<b>Toxicity</b>	F1 - Smoke index of ≤ 20 which determines the fume class
<b>Pollution Degree</b>	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

Auxiliary Module	
<b>Auxiliary Switch</b>	DIN and CBI Mini Rail mounted
<b>Trip Alarm</b>	CBI Mini Rail mount only
<b>Auxiliary Switch / Trip Alarm Combo</b>	CBI Mini Rail mount only

Breaker QL	Wire Size mm <sup>2</sup> (IEC)	Wire Gauge (UL)	Torque (IEC)	Torque (UL)	Comments
1 Pole & 2 Pole	0.75 - 35 mm <sup>2</sup>	18 - 2 - AWG	2.5 Nm	20 in-lb	Pozidriv #2 Combi head

## QL - Series Miniature Circuit Breakers

### Ordering Information

Example Code: **QL--AT-3(13)-DM-KM-15A-----R**



Group	1	2	3	4	5	6	7	8	9	10	11	12
Requirement	QL Frame	Switch / Neutral	Auxiliary switch + trip alarm	Triple pole	13 mm module width	Dual Mount	Medium delay curve KM	Current Rating 15 A	Future use	No shunt trip	Future use	Ring terminal ready
Long Code	<b>QL</b>	-	<b>AT</b>	<b>3</b>	<b>(13)</b>	<b>DM</b>	<b>KM</b>	<b>15A</b>	-	-	-	<b>R</b>

Group	Code	Description	Comments
<b>Group 1: Frame Type</b>	QL	13 mm wide miniature circuit breaker	
<b>Group 2: Switch/Neutral</b>	-	Not applicable	Overload poles do not have any further coding
	N	Neutral	Green handle
<b>Group 3: Auxiliary</b>	-	Not applicable	Use this code if no auxiliary used
	A	Auxiliary switch (1 x Aux in 1 module)	6.5 mm module fitted on right-hand side
	AA	Double auxiliary switch (2 x Aux in 1 module)	6.5 mm module fitted on right-hand side
	T	Trip alarm (1 x trip alarm in 1 module)	6.5 mm module fitted on right-hand side
	AT	Auxiliary switch + trip alarm combo (combined in 1 module)	6.5 mm module fitted on right-hand side
<b>Group 4: No of Poles</b>	1	Single pole	
	2	Double pole	2 pole or 1+N
	3	Triple pole	
	4	Four pole	3+N only
<b>Group 5: Module Width</b>	(13)	13 mm module width	13 mm per pole
<b>Group 6: Mounting</b>	D	DIN rail mount - 45 mm Escutcheon, grey body	DIN mount supplied in grey only
	DM	Dual mount - 57 mm Escutcheon, black body	Dual mount supplied in black only
<b>Group 7: Time Delays</b>	1	Long time delay, high instantaneous trip	10 – 20 Orange handle
	3	Short time delay	3 – 5 White handle
	9	Long time delay	7 – 12 White handle
	KM	Medium time delay	6 – 12 White handle
	OP	Instantaneous	None White handle
<b>Group 8: Current Ratings</b>		Code / Description	Comments
		0.1, 0.2, 0.3, 0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 16, 20, 25 A	Ratings available vary depending on certification * Other ratings are available as special orders. Check availability.
<b>Group 10: Shunt Trip (approvals pending)</b>	-	Not applicable	Use this code if no shunt trip is used
	V0	100 – 480 V AC	Fly leads (approximately 60 mm long)
	V5	100 – 480 V AC	Internally connected
		Other voltages are available as special orders. Check availability.	
<b>Group 11</b>			For future use (-)
<b>Group 12: Special Termination</b>	-	No special termination	Use this code if no special terminations are used
	R	Ring terminal ready (box terminal screw is removable)	Terminal screw is removable

**For options not listed, please contact CBI**



# QL - Series Miniature Circuit Breakers

## Time Delay Curves

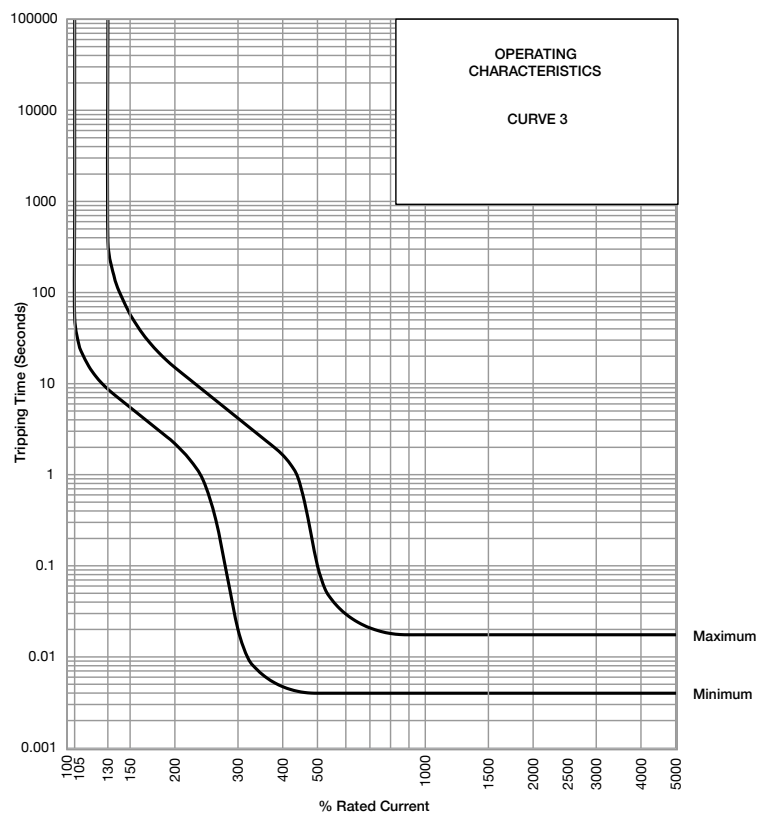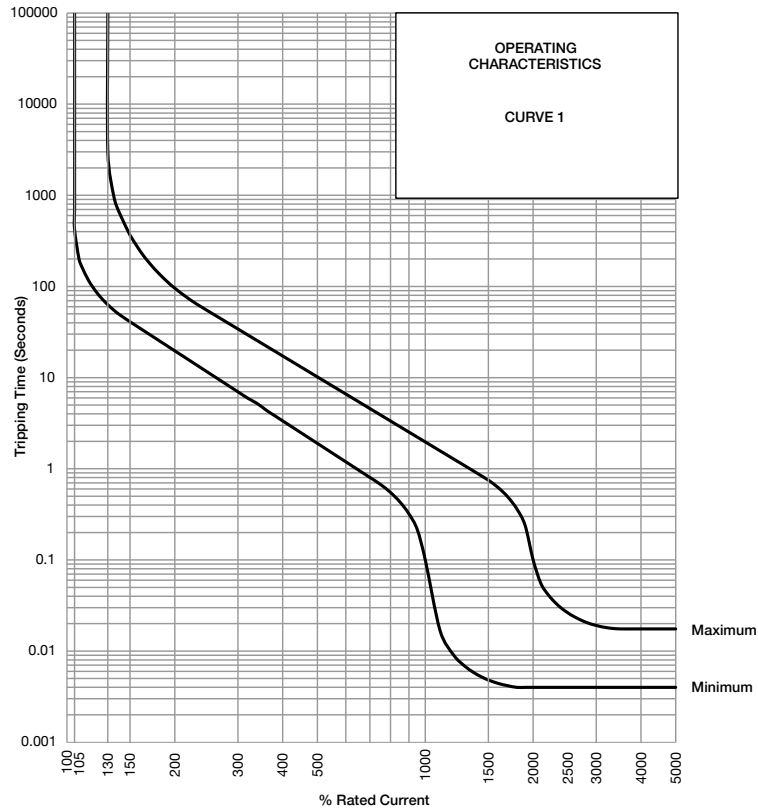


# QL - Series Miniature Circuit Breakers

## Time Delay Curves

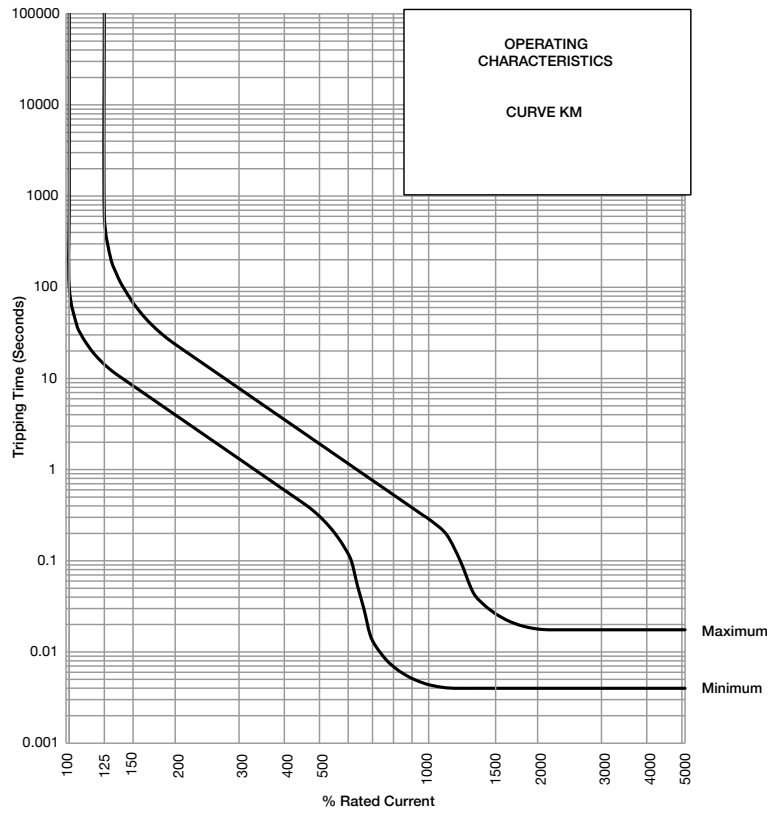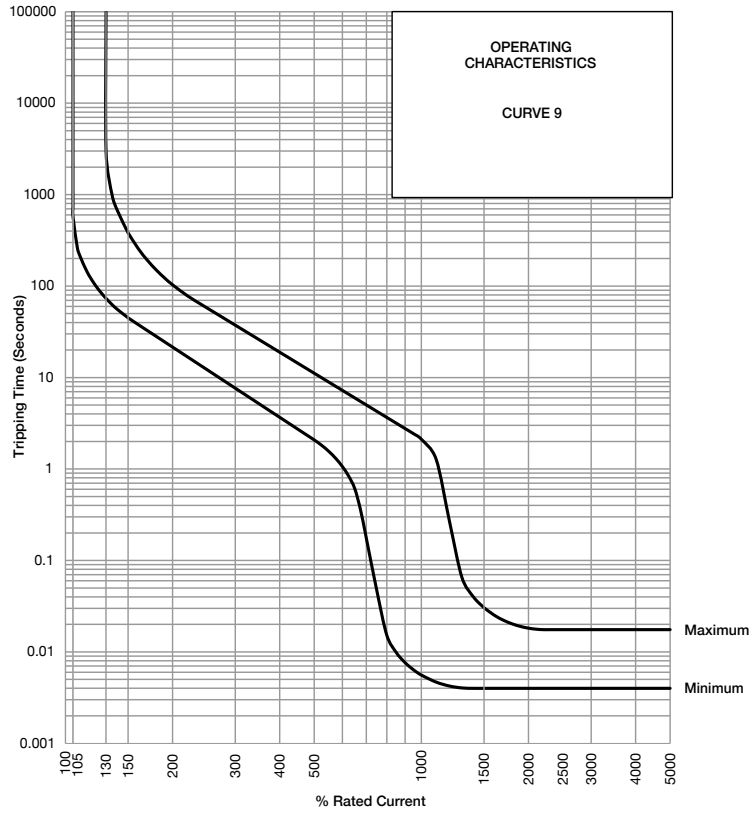


# QL - Series Miniature Circuit Breakers

## Time Delay Curves

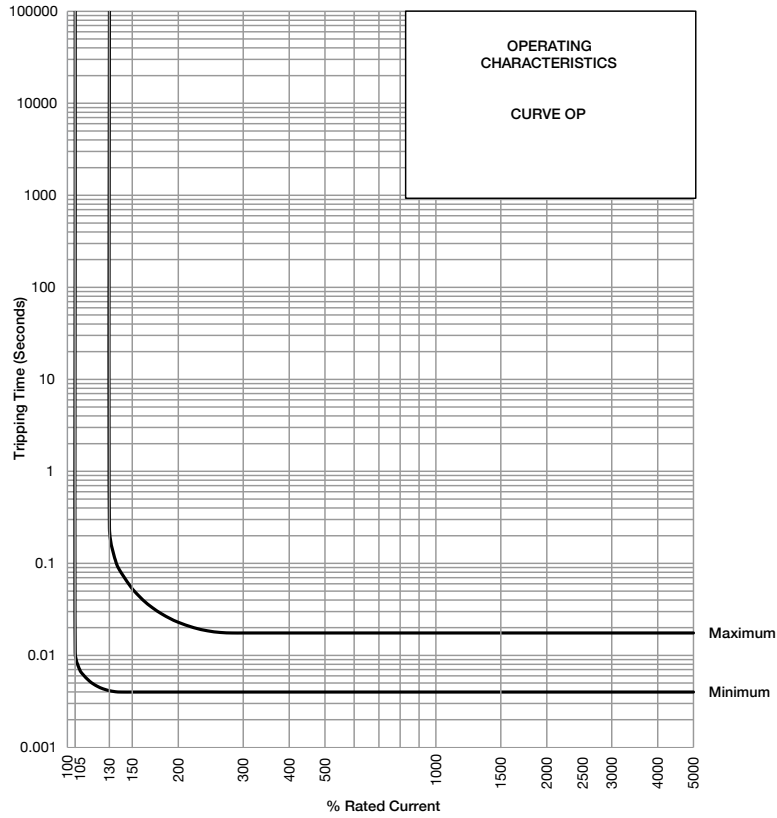


\* The published time delay curves are generated at 30°C ambient temperature with the Circuit Breaker mounted in the up-right position. The “must hold”, “must trip” and “instantaneous trip” current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.

## Internal Impedance vs Current Rating

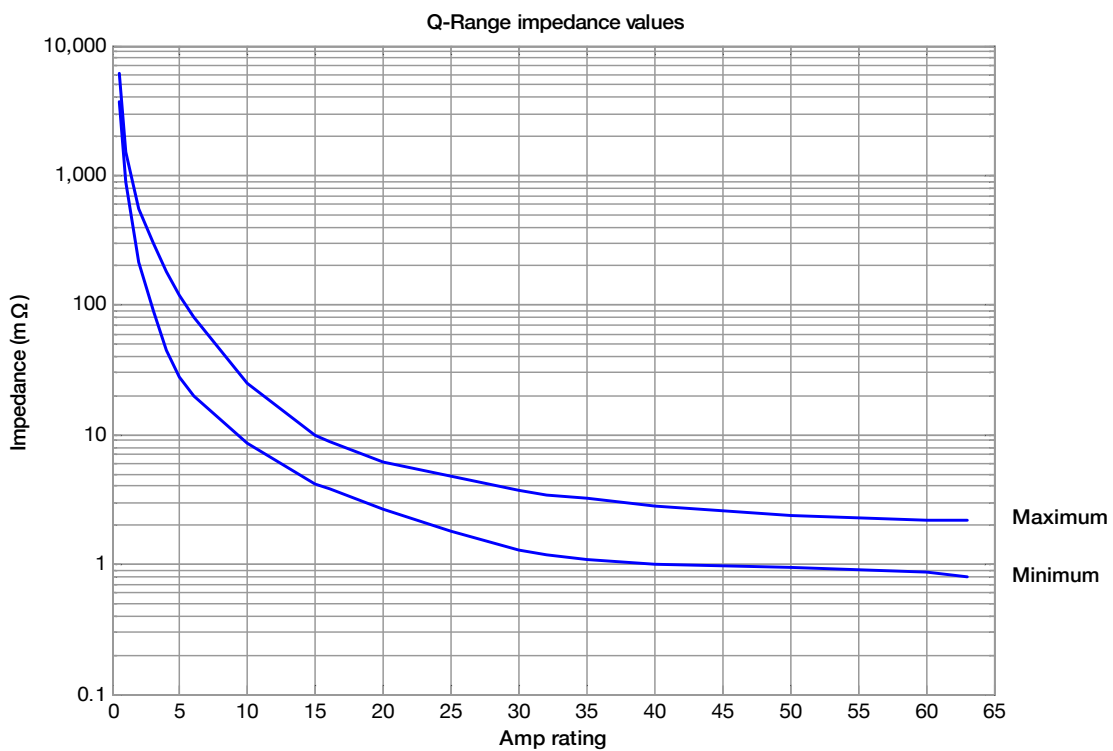


# QL - Series Miniature Circuit Breakers

## Outline Dimensions: Dual mount

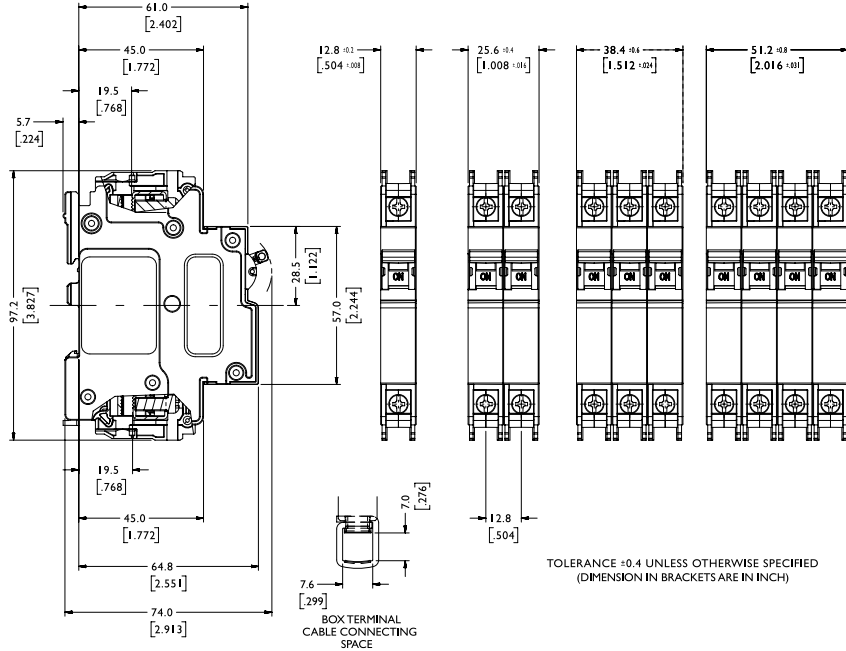

## Outline Dimensions: DIN mount

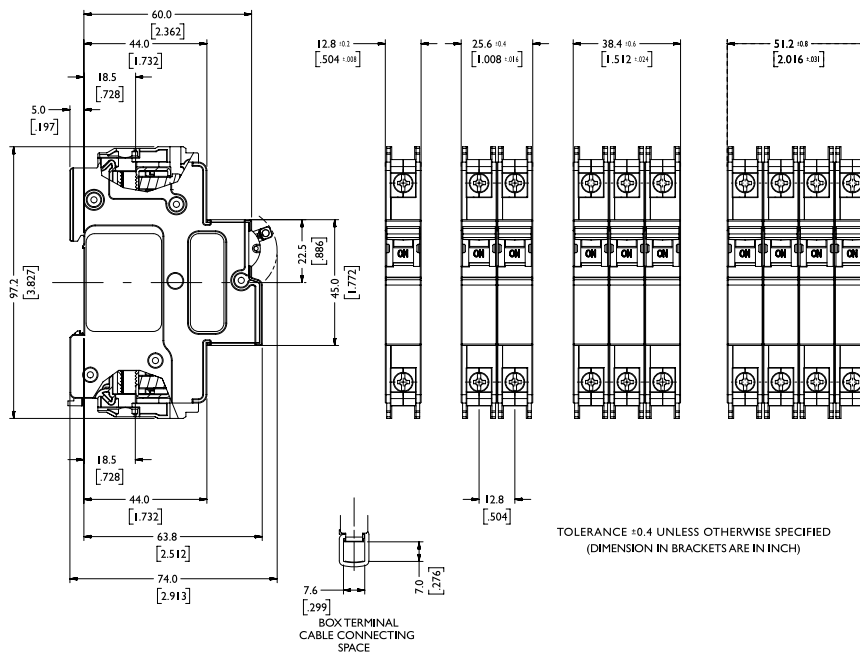

Please review our Customer Terms and Conditions on [www.cbi-lowvoltage.co.za](http://www.cbi-lowvoltage.co.za)

All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by CBI (Pty) Ltd. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission. CBI (Pty) Ltd reserves the right to alter any details of this document without notice and while every effort is made to ensure the accuracy of the content, no warranty is given as to accuracy of this document and no responsibility will be accepted for error or misinterpretation and any resulting loss.

### AUSTRALIA

**CBI-electric: Australia**  
 27 Wedgewood Rd, Hallam  
 Victoria 3803 Australia  
 Tel: +61 3 8752 9300  
 Fax: +61 3 9796 5407  
 Email: [sales@cbi-electric.com.au](mailto:sales@cbi-electric.com.au)  
 Website: [www.cbi-electric.com.au](http://www.cbi-electric.com.au)

### SOUTH AFRICA

**CBI-electric: low voltage**  
 Tripswitch Drive Elandsfontein  
 Gauteng South Africa  
 Tel: +27 11 928 2000  
 Fax: + 27 11 392 2354  
 Email: [cbi@cbi-electric.com](mailto:cbi@cbi-electric.com)  
[internationalsales@cbi-electric.com](mailto:internationalsales@cbi-electric.com)  
 Website: [www.cbi-lowvoltage.co.za](http://www.cbi-lowvoltage.co.za)

### USA

**CBI-electric: North America**  
 35 E. Uwchlan Ave Suite 328  
 Exton PA 19341 USA  
 Tel: +1 610 524 9949  
 Fax: +1 610 524 9945  
 E-mail: [info@cbibreakers.com](mailto:info@cbibreakers.com)  
 Website: [www.cbibreakers.com](http://www.cbibreakers.com)