


AC BLOWER 220x220x56mm

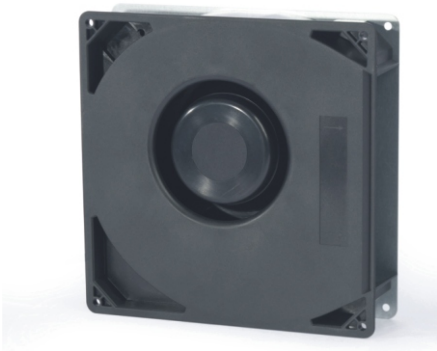

Spiral Housing: Fiberglass-Reinforced Polycarbonate

Housing Base: Galvanized Steel Plate

Blade: Thermoplastic PBT, UL 94V-0

Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame

Dielectric Strength: 1500VAC for one minute

Operation Temperature: -20°C~70°C(Humidity 35%-85%RH)

Storage Temperature: -40°C~85°C(Humidity 35%-85%RH)

Motor Protection: Thermal Protected

Weight: 1750 g **Packing:** 8PCS/CTN

ES **IP**

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA2256B11W7C-51	115	50/60	103.0/117.0	33.8/47.8	64.0/66.0	2,900/3,300	340/420	37/45	B	①/②
FBA2256B22W7C-51	230	50/60	104.0/120.0	33.8/47.8	64.0/66.0	2,900/3,400	160/200	36/44	B	①/②

Specifications are subject to change without notice

