


AC AXIAL FAN 172x151x38mm



Housing: Aluminum Housing
Blade: Steel Impeller
Insulation Resistance: 100M Ω , 500VDC/min between bare wire and frame
Dielectric Strength: 1500VAC for one minute
Operation Temperature: -20°C~70°C(Humidity 35%-85%RH)
Storage Temperature: -40°C~80°C(Humidity 35%-85%RH)
Motor Protection: Thermally Protected
Weight: 820 g Packing: 12PCS/CTN

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FA1738B11T3C-55 ※	115	50/60	140.1/128.9	3.1/2.7	45.3/34.5	1,750/1,750	70/70	8/9	B	①/②
FA1738B11T5C-55 ※	115	50/60	185.7/187.8	6.4/5.0	50.2/50.2	2,400/2,400	130/160	14.5/17	B	③/④
FA1738B11T7C-55	115	50/60	213.2/243.6	13.7/14.7	52.2/58.1	2,700/3,100	250/210	27/25	B	⑤/⑥
FA1738B22T3C-55 ※	230	50/60	140.1/128.9	3.1/2.7	46.3/44.3	1,850/1,750	40/50	10/11	B	①/②
FA1738B22T5C-55 ※	230	50/60	185.7/187.8	6.4/5.0	50.2/50.2	2,400/2,400	80/100	16.4/19	B	③/④
FA1738B22T7C-55	230	50/60	213.2/243.6	13.7/14.7	52.2/58.1	2,700/3,100	110/120	26/27	B	⑤/⑥

- For "Wire Lead" version, change the "T" in the model number to "W".
- If model depicts "※", UL approvals can be implemented upon request.

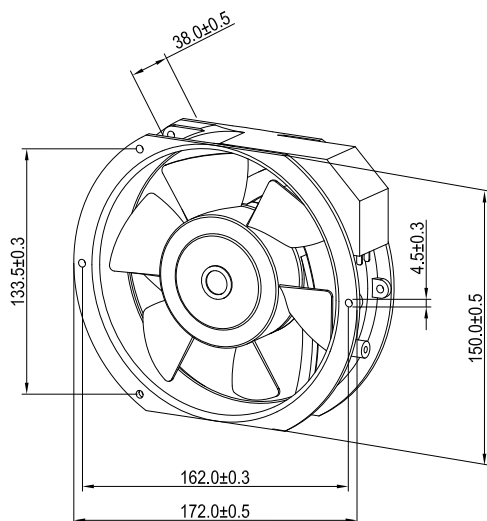

unit: mm

