


# AC AXIAL FAN Ø 254x89mm



**Housing:** Aluminum Housing  
**Blade:** Steel Impeller  
**Insulation Resistance:** 100M $\Omega$ , 500VDC/min between bare wire and frame  
**Dielectric Strength:** 1500VAC for one minute  
**Operation Temperature:** -20°C+70°C(Humidity 35%-85%RH)  
**Storage Temperature:** -40°C+80°C(Humidity 35%-85%RH)  
**Motor Protection:** Thermally Protected  
**Weight:** 2750 g      **Packing:** 6PCS/CTN

| Model Number    | Voltage (VAC) | Frequency (Hz) | AirFlow (CFM) | Stat.Pres. (mm-H <sub>2</sub> O) | Noise (dBA) | Speed (RPM) | Current (mA) | Power (W) | Available Bearing | Curves |
|-----------------|---------------|----------------|---------------|----------------------------------|-------------|-------------|--------------|-----------|-------------------|--------|
| FA2589B11T3C-55 | 115           | 50/60          | 375.6/446.6   | 6.4/8.0                          | 51.2/53.2   | 1,400/1,650 | 210/240      | 24/26     | B                 | ①/②    |
| FA2589B11T7C-55 | 115           | 50/60          | 751.1/872.9   | 22.8/21.8                        | 65.0/67.0   | 2,800/3,200 | 590/860      | 66/95     | B                 | ③/④    |
| FA2589B22T3C-55 | 230           | 50/60          | 375.6/446.6   | 6.4/8.0                          | 51.2/53.2   | 1,400/1,650 | 110/120      | 24/26     | B                 | ①/②    |
| FA2589B22T7C-55 | 230           | 50/60          | 751.1/872.9   | 22.8/21.8                        | 65.0/67.0   | 2,800/3,200 | 280/430      | 66/95     | B                 | ③/④    |

- For "Wire Lead" version, change the "T" in the model number to "W".

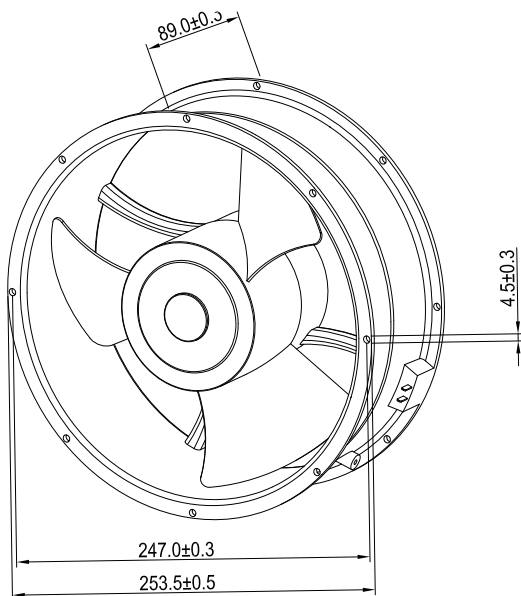

unit: mm

