

DC Centrifugal Blower Singel Inlet Ø120x76mm




Impeller:	Plastic PA6.6+GF
Motor:	DC Brushless External Rotor Motor
Rotor:	Original Aluminum Sheet Color
Bearing:	Dual Ball Bearing
Insulation:	Class "A" or "B"
Technical Features:	0-10VDC/PWM Speed Control; Alarm Output; Locked Rotor Protection; Soft Start.
Operating Temp.:	-20°C to +60°C
Weight:	1500 g



Model Number	Voltage (VDC)	Op.Voltage (VDC)	AirFlow (CFM)	AirFlow (m ³ /H)	StaticPres. (mm-H ₂ O)	StaticPres. (inH ₂ O)	Noise (dBA)	Speed (RPM)	Current (A)	Power (W)	Curves
FBD12076B48W7-57	48	36.0~56.0	187.50	318.60	48.30	1.90	57.70	2,400	0.6	28.80	①

Specifications are subject to change without notice

Characteristic Curves:

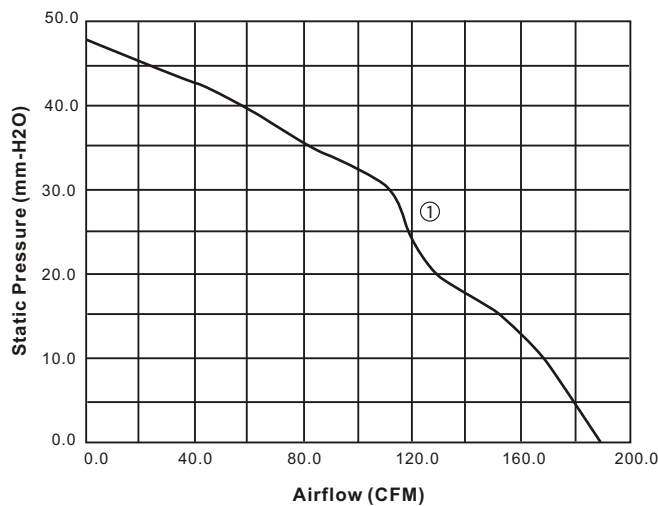

Outline Drawing:

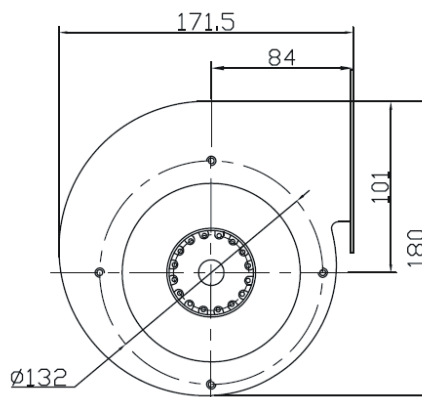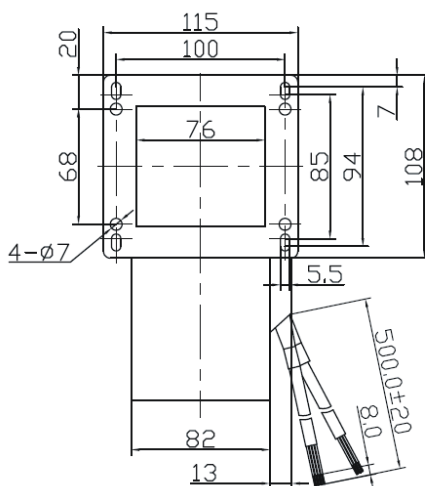

Unit:mm