

DC Centrifugal Blower Singel Inlet Ø133x64mm




Impeller:	Aluminum Sheet
Motor:	DC Brushless External Rotor Motor
Rotor:	Original Aluminum Sheet Color
Bearing:	Dual Ball Bearing
Insulation:	Class "A" or "B"
Technical Features:	0-10VDC/PWM Speed Control; Alarm Output; Locked Rotor Protection; Soft Start.
Operating Temp.:	-20°C to +60°C
Weight:	3600 g

Model Number	Voltage (VDC)	Op.Voltage (VDC)	AirFlow (CFM)	Air Flow (m ³ /H)	Static Pres. (mm-H ₂ O)	Static Pres. (inH ₂ O)	Noise (dBA)	Speed (RPM)	Current (A)	Power (W)	Curves
FBD13364B24W5-57	24	16.0~28.0	140.90	239.30	53.60	2.10	64.70	2,000	3.0	72.00	①

Specifications are subject to change without notice

Characteristic Curves:

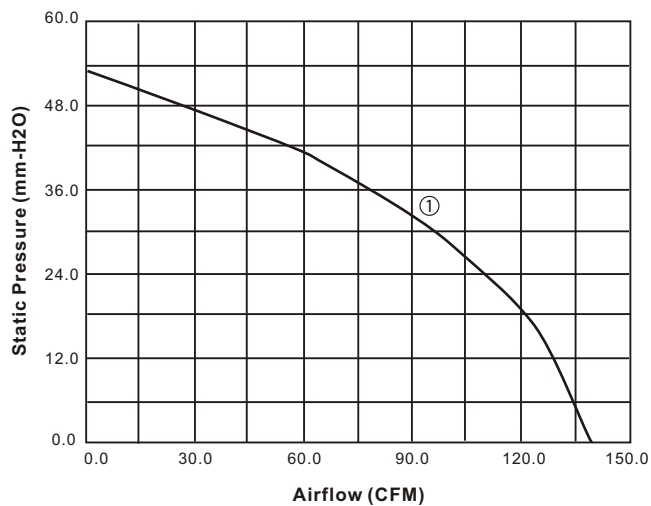

Outline Drawing:

