

DC BLOWER 57x57x12mm



Housing/Blade: Thermoplastic PBT, UL 94V-0

Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame

Dielectric Strength: 5mA max, 500VAC/min between bare wire and frame

Operation Temperature: -10°C~70°C(Humidity 35%-85%RH)

Storage Temperature: -10°C~70°C(Humidity 35%-85%RH)


Lead Wire: UL Type #28 AWG

Weight: 24.65 g Packing : 300PCS/CTN

Model Number	Voltage (VDC)	Op.Voltage (VDC)	Air Flow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBD5712B05W3-75	★ ▲ 5	4.5~5.5	2.00	3.00	10.60	2,500	80	0.40	B	①
FBD5712B05W5-75	★ ▲ 5	4.0~5.5	2.80	6.00	23.50	3,500	150	0.75	B	②
FBD5712B05W7-75	★ ▲ 5	4.0~5.5	3.70	11.00	28.20	4,500	250	1.25	B	③
FBD5712B12W3-75	★ ▲ 12	7.0~13.8	2.80	6.00	23.50	3,500	80	0.96	B	②
FBD5712B12W5-75	★ ▲ 12	7.0~13.8	3.70	11.00	28.20	4,500	120	1.44	B	③
FBD5712B12W7-75	★ ▲ 12	7.0~13.8	4.60	17.80	35.00	5,500	220	2.64	B	④
FBD5712B12W9-75	★ ▲ 12	7.0~13.8	5.40	25.00	39.00	6,500	350	4.20	B	⑤

- If model depicts "★", auto restart protection function built in.
- If model depicts "▲", polarity protection function built in.

Specifications are subject to change without notice

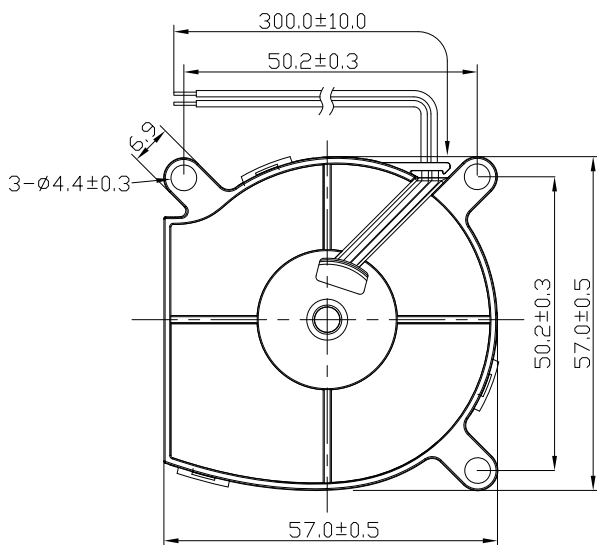

unit: mm

