

DC BLOWER 97x94x33mm




Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -20°C~70°C(Humidity 15%-90%RH)
 Storage Temperature: -40°C~85°C(Humidity 15%-90%RH)
 Lead Wire: UL Type #26 AWG
 Weight: 142 g Packing: 60PCS/CTN



Model Number	Voltage (VDC)	Op.Voltage (VDC)	Air Flow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBD9733B12W1-81 ★	12	8.0~13.8	11.50	4.00	30.00	1,500	80	0.96	B	①
FBD9733B12W2-81 ★	12	8.0~13.8	15.60	8.20	39.90	2,000	140	1.68	B	②
FBD9733B12W3-81 ★	12	8.0~13.8	19.20	13.50	46.30	2,500	310	3.72	B	③
FBD9733B12W5-81 ★	12	8.0~13.8	24.10	18.00	50.70	3,000	530	6.36	B	④
FBD9733B12W7-81 ★	12	8.0~13.8	27.50	27.60	54.20	3,500	900	10.80	B	⑤
FBD9733B24W7-81 ★	24	12.0~27.6	27.50	27.60	54.20	3,500	510	12.24	B	⑤
FBD9733B48W7-81 ★	48	38.0~52.8	27.50	27.60	54.20	3,500	300	14.40	B	⑤

• If model depicts "★", auto restart protection function built in.

Specifications are subject to change without notice

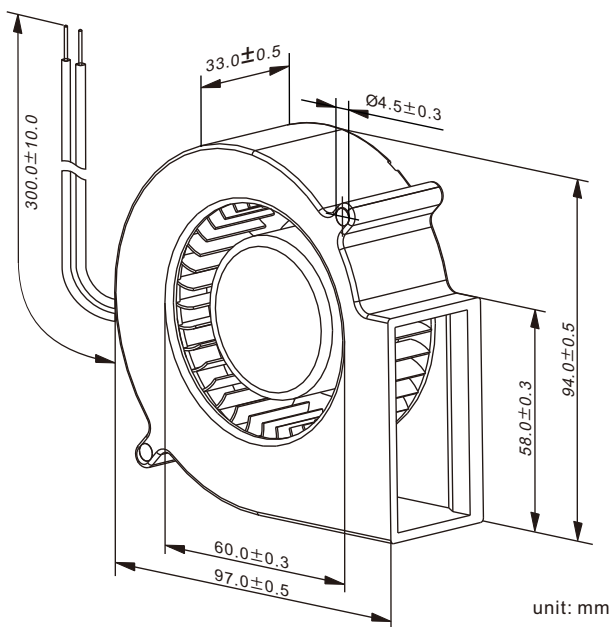

unit: mm

