

DC Axial Compact Fan 225x225x80mm




Impeller:	Plastic PA6.6+GF
Motor:	DC Brushless External Rotor Motor
Rotor:	Original Aluminum Sheet Color
Bearing:	Dual Ball Bearing
Insulation:	Class "A" or "B"
Technical Features:	0-10VDC/PWM Speed Control; Alarm Output; Locked Rotor Protection; Soft Start.
Operating Temp.:	-20°C to +60°C
Weight:	2100 g



Model Number	Voltage (VDC)	Op.Voltage (VDC)	AirFlow (CFM)	Air Flow (m ³ /H)	StaticPres. (mm-H ₂ O)	StaticPres. (inH ₂ O)	Noise (dBA)	Speed (RPM)	Current (A)	Power (W)	Curves
FD22580B24W7-57	24	16.0~28.0	583.80	991.90	25.40	1.00	61.70	2,800	2.4	57.60	①
FD22580B48W7-57	48	36.0~56.0	583.80	991.90	25.40	1.00	61.70	2,800	1.2	57.60	①

Specifications are subject to change without notice

Characteristic Curves:

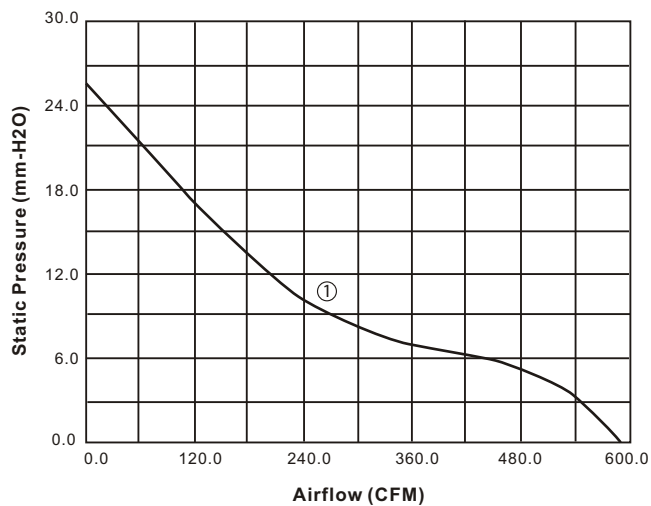

Outline Drawing:

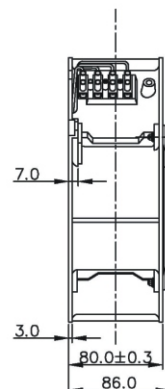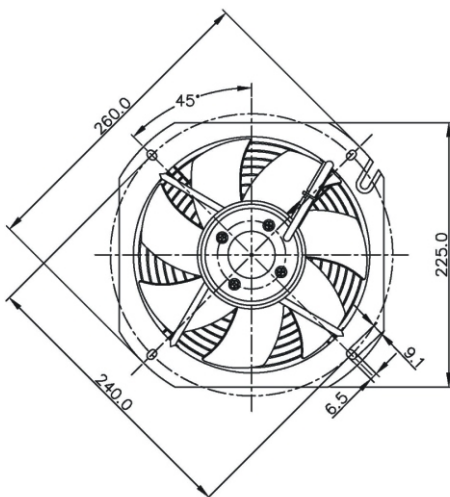

Unit:mm