

- Housing/Blade: Plastic UL 94V-0 P.B.T.
- Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
- Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
- Operation Temperature: -20°C~70°C (Humidity 15%-90%RH)
- Storage Temperature: -40°C~85°C (Humidity 15%-90%RH)
- Lead Wire: UL Type #28 AWG
- Weight: 7.5 g



DC Brushless Fan
Excellence

Specification :

Model Number	Bearing Availability	Rated Voltage (VDC)	Operating Voltage (VDC)	Actual Current (mA)	Power (W)	Speed (R.P.M)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Additional Function (See page 4)
FD2510B05W3-11	B	5	4.0~5.5	50	0.25	7,000	1.40	1.60	15.80	S
FD2510B05W5-11	B		4.0~5.5	80	0.40	8,500	1.60	2.10	17.70	S
FD2510B05W7-11	B		4.0~5.5	110	0.55	10,000	2.10	3.90	22.20	S
FD2510B05W9-11	B		4.0~5.5	140	0.70	12,000	2.40	5.30	23.60	S
FD2510B12W3-11	B	12	9.0~13.2	50	0.60	7,000	1.40	1.60	15.80	S
FD2510B12W5-11	B		7.0~13.2	53	0.64	8,500	1.60	2.10	17.70	S
FD2510B12W7-11	B		7.0~13.2	65	0.78	10,000	2.10	3.90	22.20	S
FD2510B12W9-11 ※	B		7.0~13.2	95	1.14	12,000	2.40	5.30	23.60	S

• If model with "※", the safety is pending.

Specifications are subject to change without notice


• For additional function availability type, please refer to the notes of page 4.

Accessories :

Fans are available with a wide range of accessories

Part Type	Wire Form Guard	Plastic Guard	Plastic Filter	Aluminum Filter
Part Number	FGW-025	N/A	N/A	N/A

Characteristic Curves :

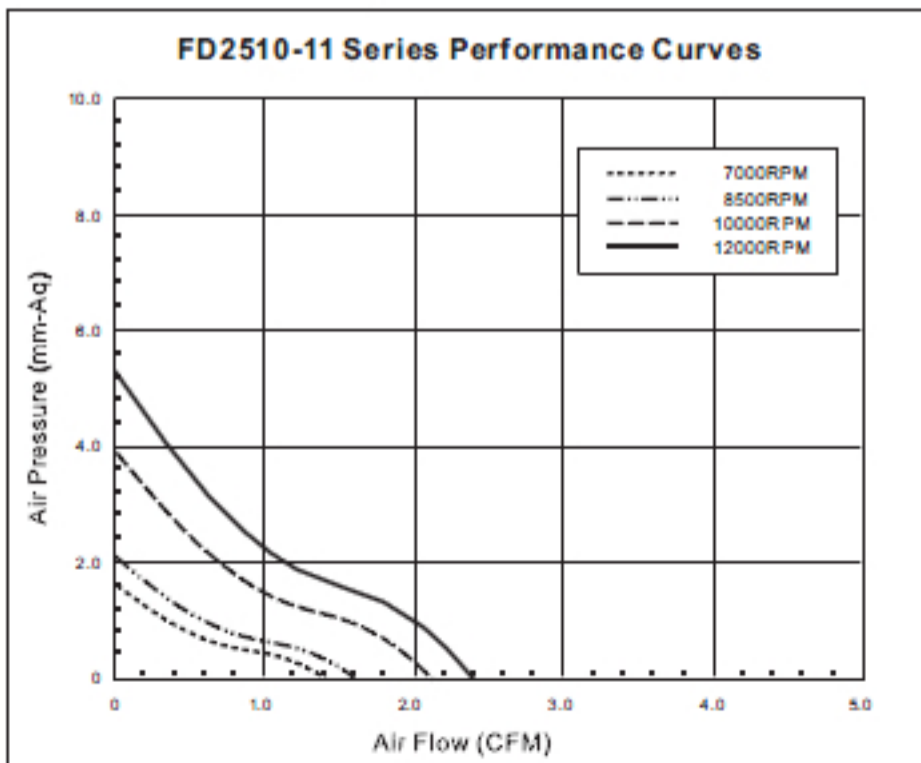

Outline Drawing :

