

DC AXIAL FAN 40x40x07mm




Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -10°C~70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C~70°C(Humidity 35%-85%RH)
 Lead Wire: UL Type #28 AWG
 Weight: 11 g Packing: 400PCS/CTN



Model Number	Voltage (VDC)	Op.Voltage (VDC)	AirFlow (CFM)	StaticPres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FD4007B05W5-71	5	4.0~5.5	5.50	2.50	29.50	6,500	230	1.15	B,S	①
FD4007B05W7-71	5	4.0~5.5	6.60	3.30	33.30	7,500	250	1.25	B,S	②
FD4007B12W5-71	12	10.8-13.2	5.50	2.50	29.50	6,500	110	1.32	B,S	①
FD4007B12W7-71	12	10.8-13.2	6.60	3.30	33.30	7,500	130	1.56	B,S	②

• For "Sleeve" bearing version, change the "B" in the model number to "S".

Specifications are subject to change without notice

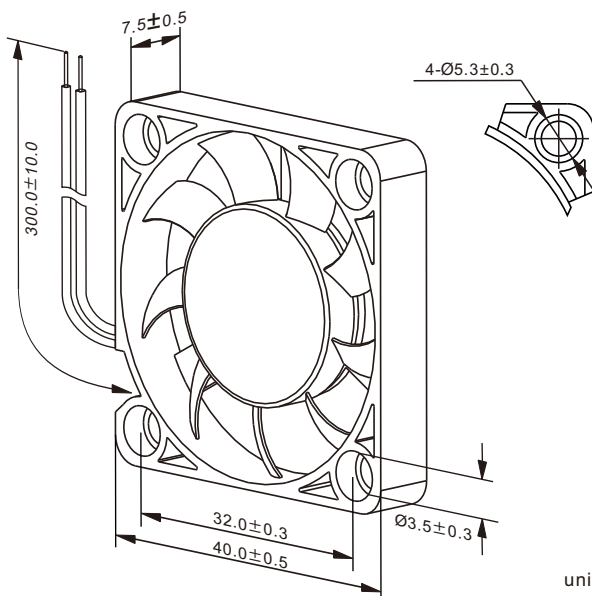

unit: mm

