

DC AXIAL FAN 80x80x25mm





Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -10°C~70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C~80°C(Humidity 35%-85%RH)
 Lead Wire: UL Type #24 AWG
 Weight: 76 g Packing: 100PCS/CTN

Model Number		Voltage (VDC)	Op.Voltage (VDC)	AirFlow (CFM)	StaticPres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FD8025B05W3-61	★▲	5	3.5~5.75	23.90	1.70	23.60	2,000	220	1.10	B,S	①
FD8025B05W5-61	★▲	5	3.5~5.75	29.90	2.60	28.60	2,500	280	1.40	B,S	②
FD8025B05W7-61	★▲	5	3.5~5.75	36.20	3.90	32.50	3,000	400	2.00	B,S	③
FD8025B12W3-61	★▲	12	6.0~13.8	23.90	1.70	23.60	2,000	80	0.96	B,S	①
FD8025B12W5-61	★▲	12	6.0~13.8	29.90	2.60	28.60	2,500	110	1.32	B,S	②
FD8025B12W7-61	★▲	12	6.0~13.8	36.20	3.90	32.50	3,000	170	2.04	B,S	③
FD8025B24W3-61	★▲	24	12.0~27.6	23.90	1.70	23.60	2,000	90	2.16	B,S	①
FD8025B24W5-61	★▲	24	12.0~27.6	29.90	2.60	28.60	2,500	120	2.88	B,S	②
FD8025B24W7-61	★▲	24	12.0~27.6	36.20	3.90	32.50	3,000	150	3.60	B,S	③

- If model depicts "★", auto restart protection function built in.
- If model depicts "▲", polarity protection function built in.

Specifications are subject to change without notice

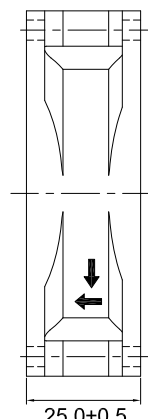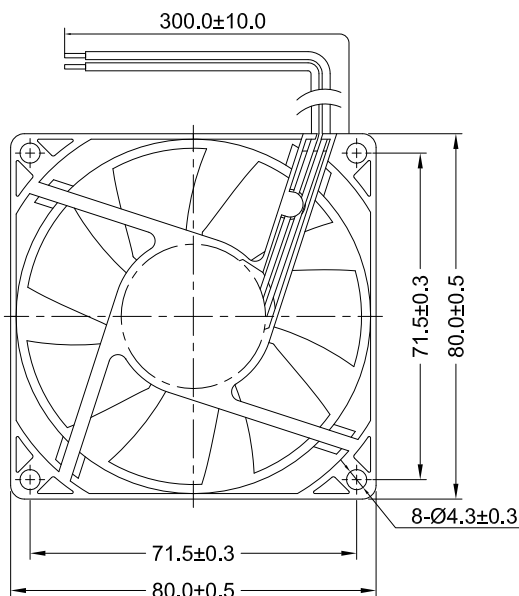

unit: mm

