


Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material: PA68 Polyimide, Flammable UL94V0
 Housing Color: Green
 Screw: Zinc Plated Steel
 Clamp: Nickel Plated Brass
 Pin: Tin Plated Brass
 P.C.B. mounting hole: 1.6mm
 Nominal current: 12 A
 Voltage: 300 V
 Temperature Range: -30° C to 85° C

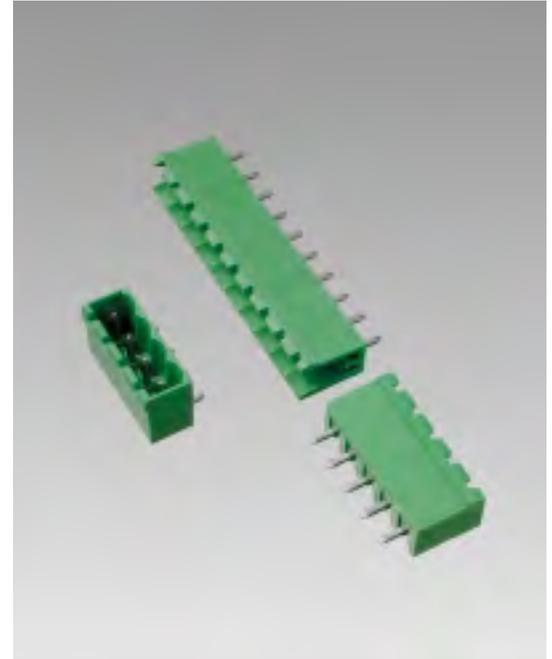

CPM .../...		CPM .../...SQ		Catalog #	No. of Positions	Length (mm)
P	L mm			CPM5-2SQ	2	11.2
5	5 x p +1.2			CPM5-3SQ	3	16.2
5.08	5.08 x p +1.2			CPM5-4SQ	4	21.2
10	10 x p -3.8			CPM5-5SQ	5	26.2
10.16	10.16 x p -3.88			CPM5-6SQ	6	31.2
				CPM5-7SQ	7	36.2
				CPM5-8SQ	8	41.2
				CPM5-9SQ	9	46.2
				CPM5-10SQ	10	51.2
				CPM5-11SQ	11	56.2
				CPM5-12SQ	12	61.2
				CPM5-13SQ	13	66.2
				CPM5-14SQ	14	71.2
				CPM5-15SQ	15	76.2
				CPM5-16SQ	16	81.2
				CPM5-17SQ	17	86.2
				CPM5-18SQ	18	91.2
				CPM5-19SQ	19	96.2
				CPM5-20SQ	20	101.2
				CPM5-21SQ	21	106.2
				CPM5-22SQ	22	111.2
				CPM5-23SQ	23	116.2
				CPM5-24SQ	24	121.2

To locate additional product specifications and technical drawings go to www.asi-ez.com