finder
RELAYING INNOVATION

55
SERIES

Relays for railway applications 7 A

- Exterior light control
- Air conditioning
- Ancillary equipment
- Doors opening/ closing
- Internal light management
- Message panels infotainment



Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice.
FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document.
In case of discrepancies between the printed and online versions, the latter prevails.


Plug-in mount, general purpose
4 Pole relays, 7 A


- Complies with EN 45545-2:2020 (protection against fire of materials), EN 61373 (resistance against random vibrations and shock, Category 1, Class B), EN 50155 (resistance to temperature and humidity, OT4/ST1 class)
- DC coils with extended range
- Cadmium Free contacts (standard version)
- 94 series sockets
- Coil EMC suppression modules
- Accessories (Sockets and Timer modules)

55.34T



- 4 pole, 7 A
- Plug-in 94 series sockets





* Short term (10 min) +85°C


For outline drawing see page 5

Contact specification		
Contact configuration		4 CO (4PDT)
Rated current/Maximum peak current	A	7/15
Rated voltage/Maximum switching voltage	V AC	250/250
Rated load AC1	VA	1750
Rated load AC15 (230 V AC)	VA	350
Single phase motor rating (230 V AC)	kW	0.24
Breaking capacity DC1: 24/110/220 V	A	7/0.5/0.25
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material		AgNi
Coil specification		
Nominal voltage (U_N)	V AC (50/60 Hz)	—
	V DC	24 - 72 - 110
Rated power DC	W	1
Operating range	AC	—
	DC	(0.70…1.25)U_N
Holding voltage	DC	0.5 U_N
Must drop-out voltage	DC	0.1 U_N
Technical data		
Mechanical life AC/DC	cycles	$50 \cdot 10^6$
Electrical life at rated load AC1	cycles	$150 \cdot 10^3$
Operate/release time	ms	11/3
Insulation between coil and contacts (1.2/50 µs)	kV	4
Dielectric strength between open contacts	V AC	1000
Ambient temperature range	°C	–40…+70*
Environmental protection		RT I
Approvals (according to type)		CE UK CA

B

Ordering information

Example: 55 series plug-in relay, 4 CO (4PDT), 24 V DC coil.

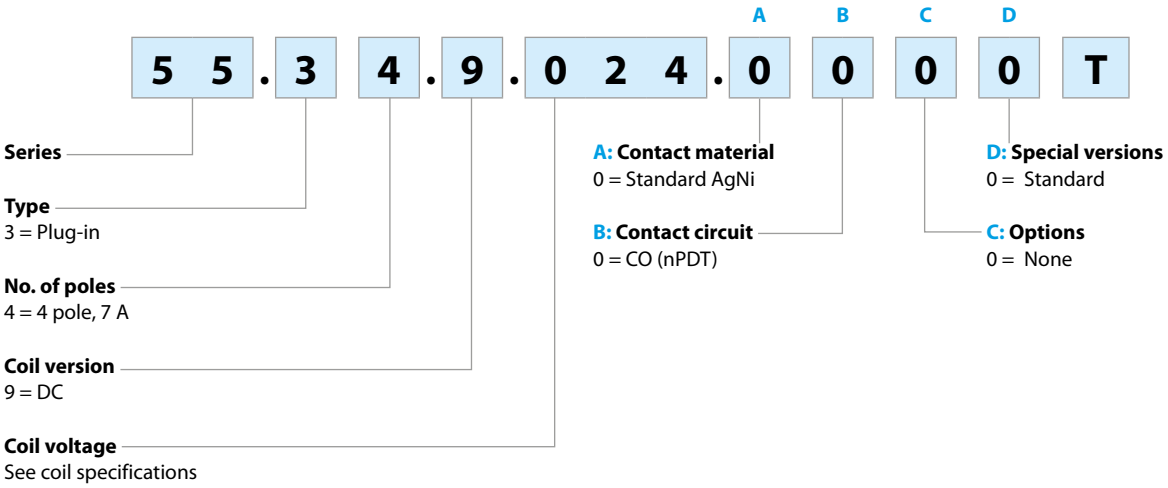


Technical data


Insulation according to EN 61810-1			
Nominal voltage of supply system		V AC	230
Rated insulation voltage		V AC	250
Pollution degree			2
Insulation between coil and contact set			
Type of Insulation			Basic
Overvoltage category			III
Rated impulse voltage		kV (1.2/50 µs)	4
Dielectric strength		V AC	2000
Insulation between adjacent contacts			
Type of insulation			Basic
Overvoltage category			II
Rated impulse voltage		kV (1.2/50 µs)	2.5
Dielectric strength		V AC	2000
Insulation between open contacts			
Type of disconnection			Micro-disconnection
Dielectric strength		V AC/kV (1.2/50 µs)	1000/1.5
Insulation between coil terminals			
Rated impulse voltage (according to EN 50121)		kV (1.2/50 µs)	2.5
Other data			
Bounce time: NO/NC		ms	1/3
Vibration resistance: NO/NC			According to EN 61373
Shock resistance			According to EN 61373
Power lost to the environment	without contact current	W	1
	with rated current	W	3
Recommended distance between relays mounted on PCB		mm	≥ 5

Contact specification

F 55 - Electrical life (AC) v contact current

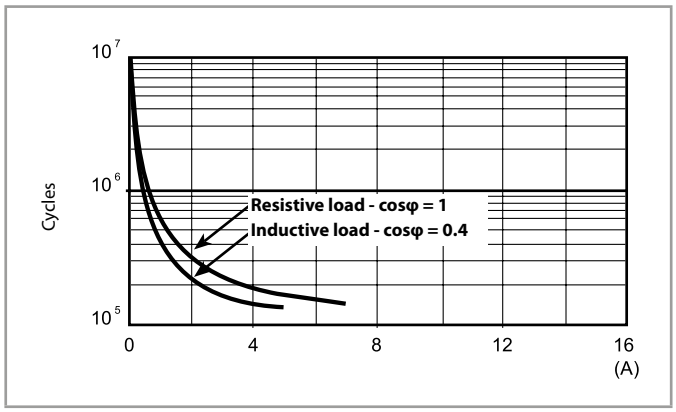

H 55 - Maximum DC1 breaking capacity

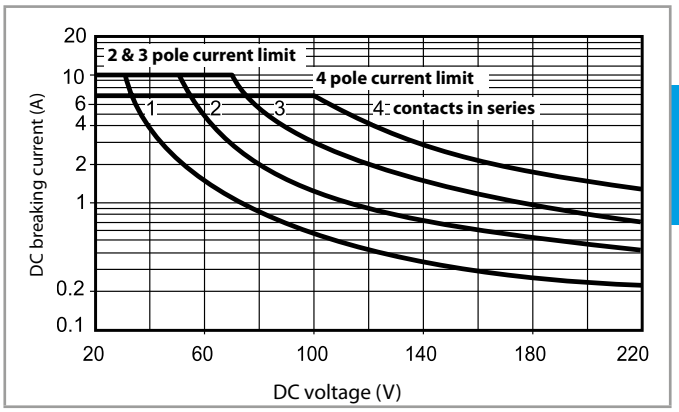


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10³ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time of the load will be increased.

Coil specifications

DC coil data

Nominal voltage	Coil code	Operating range		Resistance	Rated coil consumption
U_N		U_{min}	U_{max}	R	I at U_N
V		V	V	Ω	mA
24	**9**.024	16.8	30	600	40
72	**9**.072	50.4	90	4000	15
110	**9**.110	77	137.5	12500	8.8


R 55 - DC coil operating range v ambient temperature

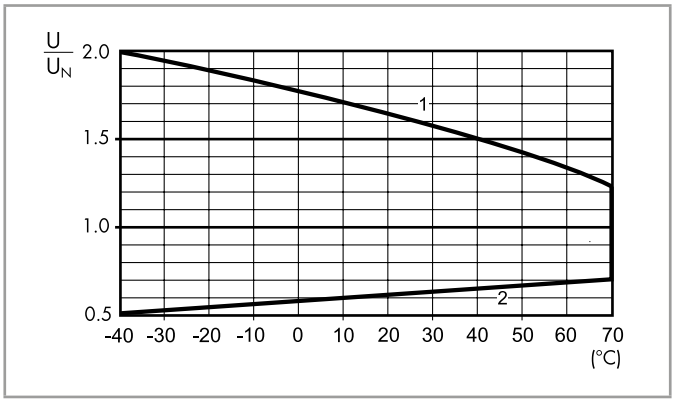

1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

Outline drawing

Type 55.34T



94 SERIES
Sockets and accessories for 55 series relays





94.04.7

Approvals (according to type):

Box clamp socket panel or 35 mm (EN 60715) rail mount		**94.04.7 SMA***	
For relay type		55.34T	
Accessories			
Metal retaining clip		094.71	
6-way jumper link		094.06	
Identification tag		094.00.4	
Modules (see table below)		99.02	
Timer modules (see table below)		86.30T	
Technical data			
Rated values		10 A - 250 V	
Dielectric strength		2 kV AC	
Protection category		IP 20	
Ambient temperature	°C	–40…+70	
Screw torque	Nm	0.5	
Wire strip length	mm	8	
Max. wire size for 94.04.7 sockets		solid wire	stranded wire
	mm²	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5
	AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14


* Complies with **EN 45545-2:2020** (protection against fire of materials), **EN 61373** (resistance against random vibrations and shock, Category 1, Class B), **EN 50155** (resistance to temperature and humidity, **OT4/ST1** class)

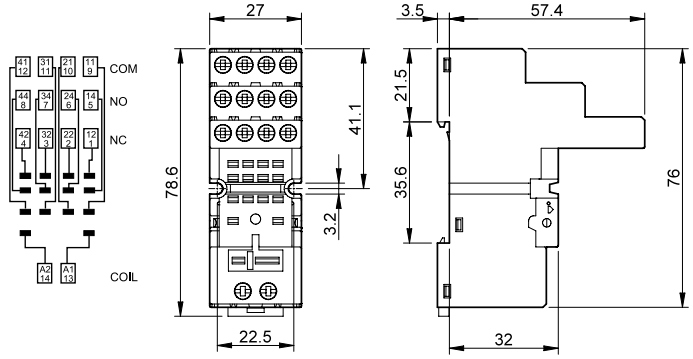



094.06

6-way jumper link for 94.04.7 socket	094.06
Rated values	10 A - 250 V

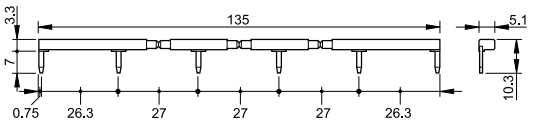



86.30


86 series timer modules		
(12…24)V AC/DC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.0.024.0000T	
Approvals (according to type):		AI: ON-delay DI: Interval



99.02

99.02 coil indication and EMC suppression modules for 94.04.7 socket		
Diode (+A1, standard polarity)	(6…220)V DC	99.02.3.000.00
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	(28…72)V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.02.9.220.99
LED + Varistor	(6…24)V DC/AC	99.02.0.024.98
LED + Varistor	(28…72)V DC/AC	99.02.0.060.98
LED + Varistor	(110…240)V DC/AC	99.02.0.230.98
Approvals (according to type):		DC Modules with non-standard polarity (+A2) on request.

III-2026, www.findernet.com




94.P4.7

Approvals (according to type):

Push-in terminal socket 35 mm rail (EN 60715) mount		**94.P4.7 SMA***	
For relay type		55.34T	
Accessories			
Metal retaining clip		094.71	
2-way jumper link		094.52.1	
2-way jumper link		097.52	
Modules (see table below)		99.02, 86.30T	
Technical data			
Rated values		10 A - 250 V	
Dielectric strength		2 kV AC	
Protection category		IP 20	
Ambient temperature	°C	–40…+70	
Wire strip length	mm	10	
Min. wire size for 94.P4.7 sockets		solid wire	stranded wire
	mm²	0.5	0.5
	AWG	21	21
Max. wire size for 94.P4.7 sockets		solid wire	stranded wire
	mm²	2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
	AWG	2 x 18 / 1 x 14	2 x 18 / 1 x 14


* Complies with **EN 45545-2:2020** (protection against fire of materials), **EN 61373** (resistance against random vibrations and shock, Category 1, Class B), **EN 50155** (resistance to temperature and humidity, **OT4/ST1** class)

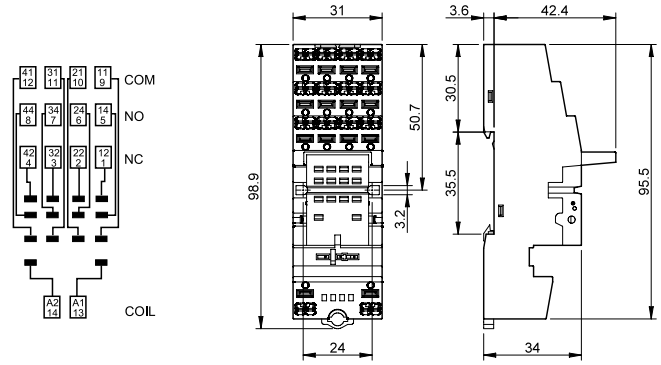



094.52.1


2-way jumper link for 94.P4.7 sockets	094.52.1
Rated values	10 A - 250 V

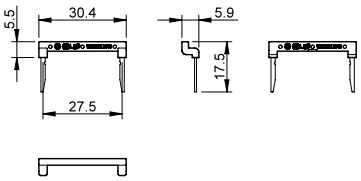



097.52

2-way jumper link for 94.P4.7 sockets	097.52
Rated values	10 A - 250 V





86.30

86 series timer modules		
(12…24)V AC/DC; Bi-function: AI, DI; (0.05 s…100 h)		86.30.0.024.0000T
Approvals (according to type):		AI: ON-delay DI: Interval



99.02

99.02 coil indication and EMC suppression modules for 94.P4.7 socket		
Diode (+A1, standard polarity)	(6…220)V DC	99.02.3.000.00
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	(28…72)V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.02.9.220.99
LED + Varistor	(6…24)V DC/AC	99.02.0.024.98
LED + Varistor	(28…72)V DC/AC	99.02.0.060.98
LED + Varistor	(110…240)V DC/AC	99.02.0.230.98
Approvals (according to type):		DC Modules with non-standard polarity (+A2) on request.