




Mounting hole (inch)	0.2362"
Mounting hole (metric)	6mm
Indicator type	bi-color
Mounting type	with bezel
Bezel type	recessed
Bezel material	metal
Bezel color	black chrome
Bezel size	M6
Protection	IP40
Lens type	round
Lens color	white diffused
Lens size	3mm
Connector Tpe	leads of LEDs
Connector number	2
Connector for lamp test	no
Number LED chip	2
Indicator color	green/yellow
Dom wave length	568nm/588nm
Peak Wave Lenght (mA)	
Op. voltage (V)	without resistor
Forward volt max.	
Rectifier	-
AC current	-
DC current	20mA
Lum in min (mcd)	
Lum in type (DC)	40/20mcd

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1903	Print date : 07/05/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :

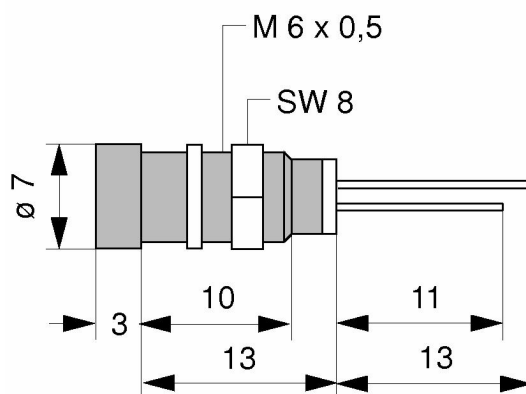

Part Number : 19031006
Serial Number : 1903
LEDs Indicators

Voltage tolerance (%)	-
Op. temperature (°C)	-25°C...+60°C
Storage temperature (°C)	-25°C...+60°C
Narrative	
Viewing angle (°)	

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1903	Print date : 07/05/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :