


### Mechanical Dimensions: Inches [mm]

|          |         |        |         |          |
|----------|---------|--------|---------|----------|
| Size(mm) | 0.5-6   | >6-30  | >30-120 | >120-400 |
| Tol(mm)  | +/-0.01 | +/-0.2 | +/-0.3  | +/-0.5   |

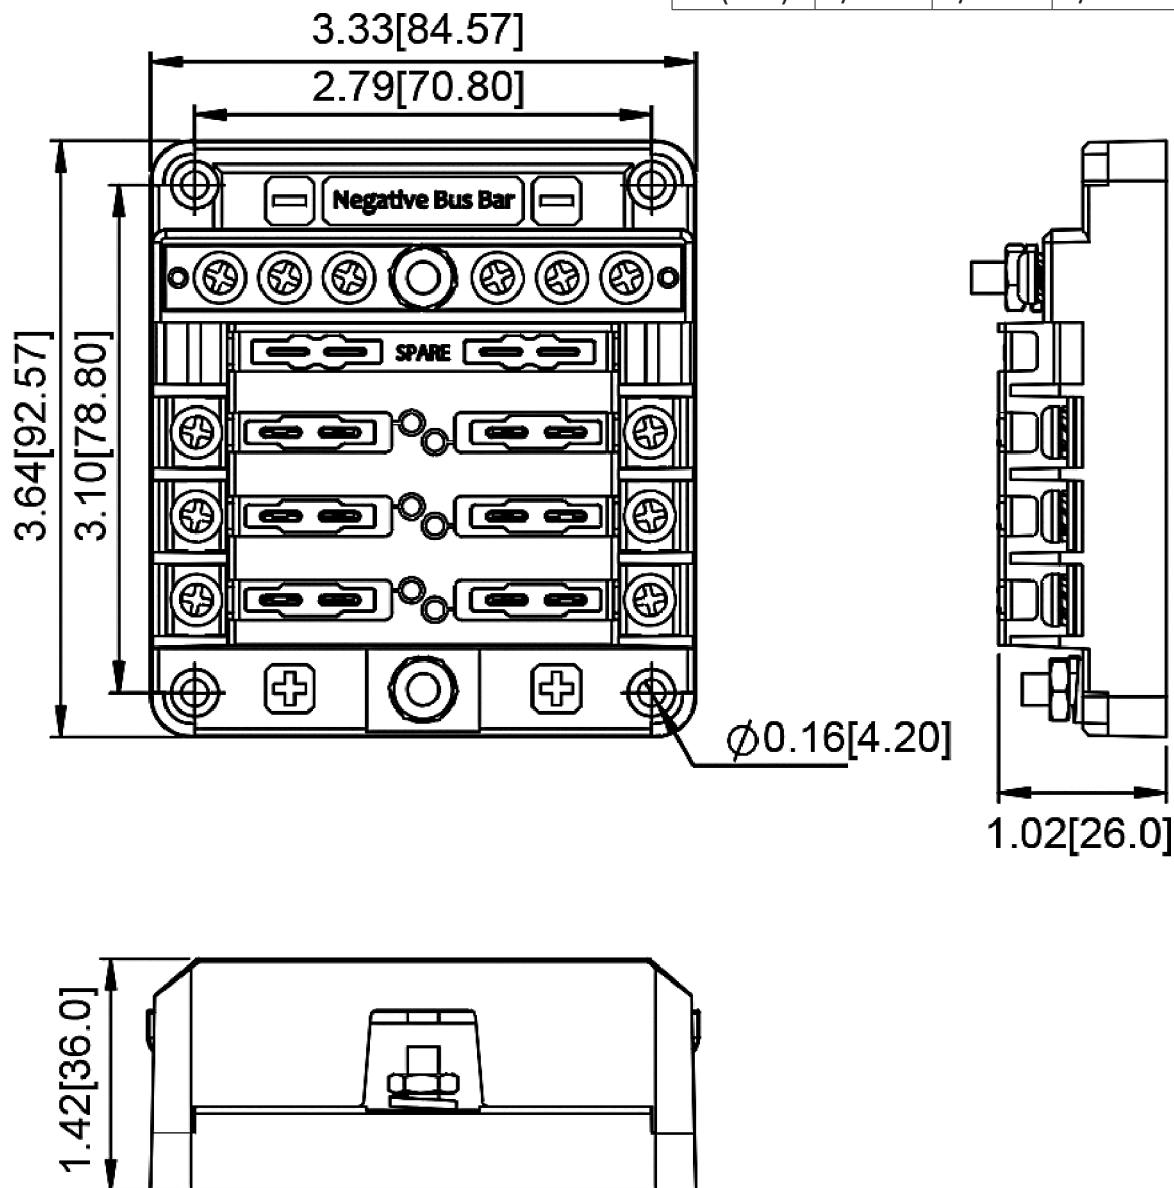


## Specifications

|                                             |                         |
|---------------------------------------------|-------------------------|
| <b>Voltage Rating</b>                       | 32VDC                   |
| <b>Current Rating (Combined Circuits)</b>   | 100A                    |
| <b>Current Rating (Max Input)</b>           | 30A                     |
| <b>Load Side Connection</b>                 | M4 (#8) Screw Terminals |
| <b>Line Side Connection</b>                 | M5 (#10) Studs          |
| Accepts Regular (ATO/ATC Style) Blade Fuses |                         |
| 6 Circuits with Ground Bus                  |                         |

|                                                         |         |
|---------------------------------------------------------|---------|
| LED Indication of blown fuse                            |         |
| Transparent cover with recessed area for label stickers |         |
| 60pcs assorted label stickers set included              |         |
| Storage for 2 spare fuses                               |         |
| <b>Insertion Force</b>                                  | 3.0kg   |
| <b>Extraction Force</b>                                 | 2.3kg   |
| <b>Stud Torque</b>                                      | 3.0 N.m |
| <b>Screw Torque</b>                                     | 2.7 N.m |

Isometric View

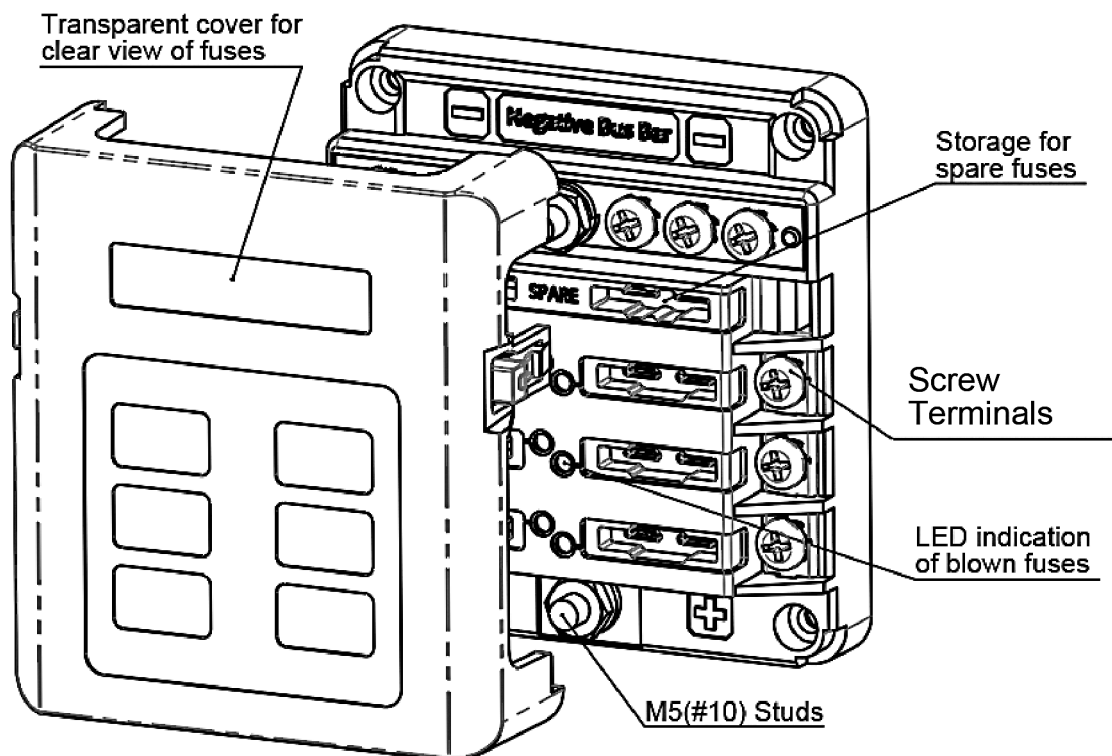

Rev Date of issue Revision Notes

Designed Approved

|   |            |                        |    |    |
|---|------------|------------------------|----|----|
| B | 05-27-2025 | Updated Specifications | RC | OF |
|---|------------|------------------------|----|----|