
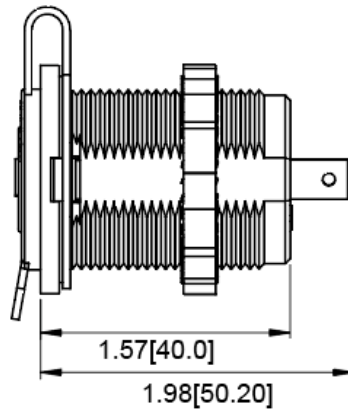

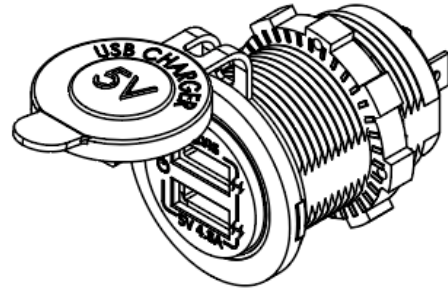
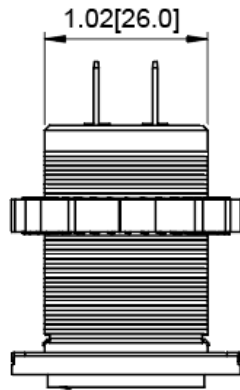


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

Mounting Hole

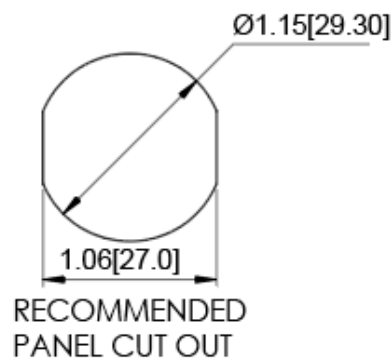

Electrical Specifications

Input Rating	12/24 VDC
Output rating (12VDC input)	Type A output 1: 5V 2.4A Type A output 2: 5V 2.4A Type A + A output: 5V 2.4A + 5V 2.4A (4.8A max)
Output rating (24VDC input)	Type A output 1: 5V 2.4A Type A output 2: 5V 2.4A Type A + A output: 5V 2.4A + 5V 2.4A (4.8A max)

Certifications


Includes OVP, OCP, OTP, SCP, and RPP

Material Specifications

Laser Etched Front Cover with Backlight Effect

LED power saving touch switch prevents battery drainage

Body Material Flame Retardant Nylon (Glass Fiber Reinforced)

Ingress Protection IP66 (When not in use and cap is securly closed)

Type A USB

Power Adapter - USB Socket

A8-USB2-1-B-4.8A-T



Rev	Date of issue	Revision Notes	Designed	Approved
D	05-20-2025	Initial Drawing	RC	OF