


Series 64

Features


- Fits into .375 panel hole
- LED, incandescent, and neon illumination
- Sealed, NEMA 3-R
- Lock Washer, Hexnut (Bulk)

Specifications

- Body Material: Nylon
- Lens Material: Polycarbonate
- Wire Gauge: 18 ga.
- Wire Strip: 1/2"
- Panel Thickness: .030" to .250"
- Certifications: Contact Us

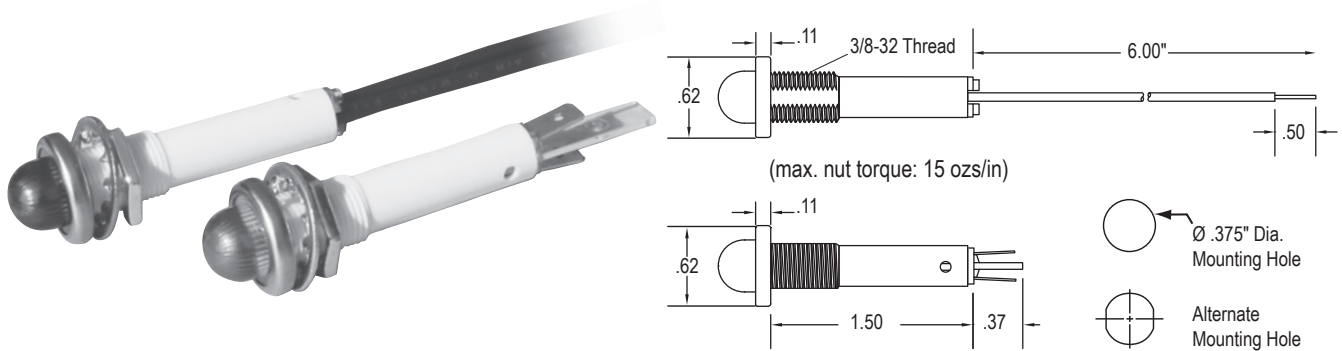

Series	Lamp		Termination			Base		Bezel		Lens				
XX	XX		X			X		X		XXX		X	00	
	Voltage	Type	Code	Style	Code	Color	Code	Finish	Code	Style	Code	Color	Code	
64	2	LED	10	6" Wire	1	White	1	Stainless	1	Cylinder Translucent	371	Red	1	
	6	LED	11	.187 Tabs	3			Bright	2	Cylinder Diamond	373	Amber	2	
	14	LED	12					Black	3	Cylinder Translucent	381	Clear	3 ¹	
	28	LED	13							Cylinder Diamond	383	Green	4	
	125	LED	15							Cylinder Rings	386	Blue	5	
	250	LED	16 ²							Cylinder Diamond	393	White	6	
	6	INCAND	32							Small Dome Lines	405	Yellow	8	
	14	INCAND	35							Large Dome Lines	415			
	28	INCAND	39							Flush Lens w/Tapered Bezel	626 ³	<u>Color</u>	<u>Marked</u>	
	125	NEON	50									Red	A	
	250	NEON	52									Amber	B	
	2	ViviBright LED	60									Clear	C ¹	
	6	ViviBright LED	61									Green	D	
	14	ViviBright LED	62									Blue	E	
	28	ViviBright LED	63									White	F	
	125	ViviBright LED	65									Yellow	H	
	250	ViviBright LED	66 ²											
	Custom		XX											

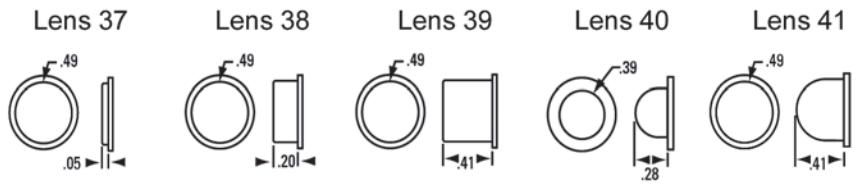

Additional Options Available:
Contact sales@solico.com

1. Clear lens has white LED
2. Wire Leads only
3. Bright Bezel only, use code 2