

SMALL UTILITY ENCLOSURES




The 1100 are used where the control installation does not require a high degree of protection (such as watertight or dust tight).

CSA Certified / UL Listed / NEMA / EEMAC 1 / IP30

Technical specifications:

- Made of high quality code gauge steel.
- Enclosure comes complete with a galvanized inner panel.
- Enclosures are closed with ¼ turn locks.
- Four internal mounting holes are provided.

- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 smooth gray.

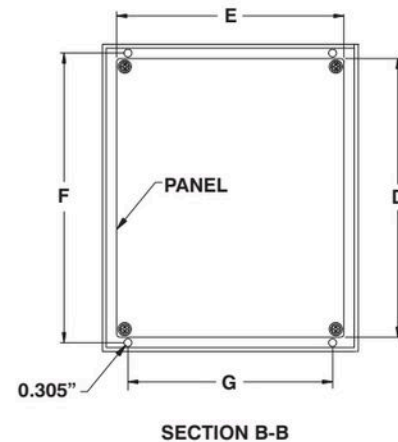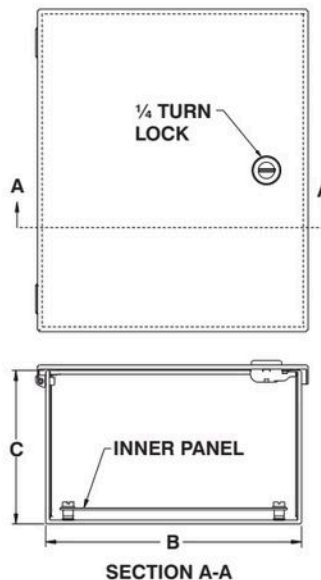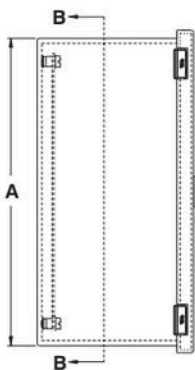

CUSTOMIZE THIS
ENCLOSURE WITH **BOXCAD**
SIZE - COLOR - CUT-OUTS

CATALOG NUMBER	DIMENSIONS							SHIP WGT LBS.
	A	B	C	D	E	F	G	
1100 060604	6	6	4	4.88	4.88	5.312	4	4
1100 080604	8	6	4	6.88	4.88	7.312	4	4
1100 080804	8	8	4	6.88	6.88	7.312	4	4
1100 100804	10	8	4	8.88	6.88	9.312	6	7
1100 101004	10	10	4	8.88	8.88	9.312	8	8
1100 121004	12	10	4	10.88	8.88	11.31	8	9
1100 121204	12	12	4	10.88	10.88	11.31	10	11
1100 141204	14	12	4	12.88	10.88	13.31	10	12
1100 080606	8	6	6	6.88	4.88	7.312	4	5
1100 080806	8	8	6	6.88	6.88	7.312	6	7
1100 100806	10	8	6	8.88	6.88	9.312	6	8
1100 101006	10	10	6	8.88	8.88	9.312	8	9
1100 121006	12	10	6	10.88	8.88	11.31	8	11
1100 121206	12	12	6	10.88	10.88	11.31	10	12
1100 141206	14	12	6	12.88	10.88	13.31	10	14
1100 161206	16	12	6	14.88	10.88	15.31	10	16
1100 121208	12	12	8	10.88	10.88	11.31	10	14
1100 141208	14	12	8	12.88	10.88	13.31	10	16
1100 161208	16	12	8	14.88	10.88	15.31	10	17







The 1100 are used where the control installation does not require a high degree of protection (such as watertight or dust tight).

CSA Certified / UL Listed /
NEMA / EEMAC 1 / IP30


Technical specifications:

- Made of high quality code gauge steel.
- Enclosure comes without inner panel.
- Enclosures are closed with ¼ turn locks.
- Four internal mounting holes are provided.

- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 smooth gray.

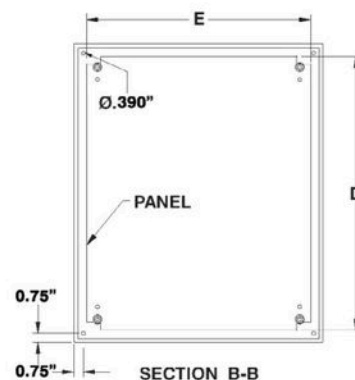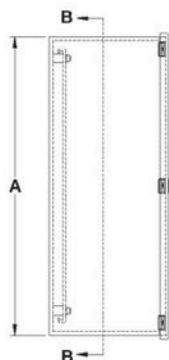

CATALOG NUMBER	DIMENSIONS						BOX & COVER GAUGE	SHIP WGHT LBS.
	A	B	C	C1	D	E		
1100 161606	16	16	6.870	6	14	14	16	20
1100 162006	16	20	6.870	6	14	18	16	25
1100 201206	20	12	6.870	6	18	10	16	20
1100 201606	20	16	6.870	6	18	14	16	25
1100 202006	20	20	6.870	6	18	18	16	30
1100 241606	24	16	6.870	6	22	14	16	29
1100 242006	24	20	6.870	6	22	18	16	35
1100 242406	24	24	6.870	6	22	22	14	49
1100 302406	30	24	6.870	6	28	22	14	59
1100 362406	36	24	6.870	6	34	22	14	70
1100 363006	36	30	6.870	6	34	28	14	85
1100 161608	16	16	8.870	8	14	14	16	22
1100 201208	20	12	8.870	8	18	10	16	22
1100 201608	20	16	8.870	8	18	14	16	27
1100 202008	20	20	8.870	8	18	18	16	32
1100 242008	24	20	8.870	8	22	18	16	38
1100 242408	24	24	8.870	8	22	22	14	53
1100 302008	30	20	8.870	8	28	18	14	55
1100 302408	30	24	8.870	8	28	22	14	64
1100 303008	30	30	8.870	8	28	28	14	77
1100 362408	36	24	8.870	8	34	22	14	75
1100 363008	36	30	8.870	8	34	28	14	90
1100 202010	20	20	10.870	10	18	18	16	35
1100 242010	24	20	10.870	10	22	18	16	41
1100 302410	30	24	10.870	10	28	22	14	69
1100 242412	24	24	12.870	12	22	22	14	61
1100 302412	30	24	12.870	12	28	22	14	73
1100 363012	36	30	12.870	12	34	28	14	102

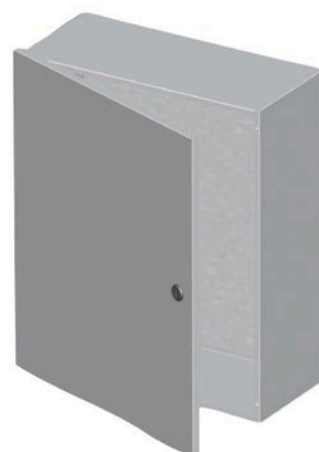

Note : The inner pannel must be ordered separately.



p.540



p.506



p.592



p.600



p.607



p.628



p.617

CUSTOMIZE IT
BOX CAD

EXM
exm.

185

NEMA 1 ENCLOSURES

1100 W

SMALL WINDOWED UTILITY ENCLOSURES





The **1100 W** are used where the control installation does not require a high degree of protection (such as watertight or dust tight).

CSA Certified / UL Listed / NEMA / EEMAC 1 / IP30

Technical specifications:

- Made of high quality code gauge steel.
- Enclosure comes complete with a galvanized inner panel.
- Enclosures are closed with 1/4 turn locks.
- Four internal mounting holes are provided.

- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 smooth gray.

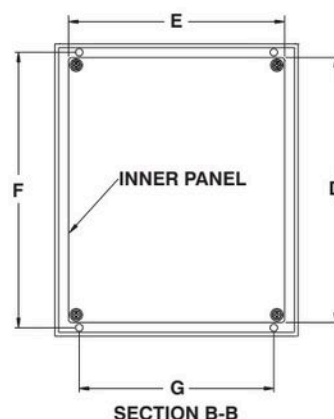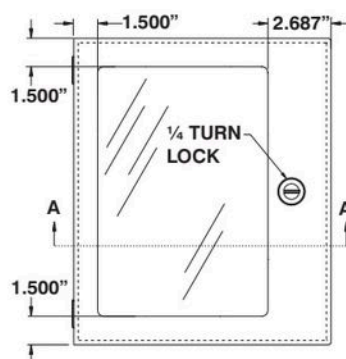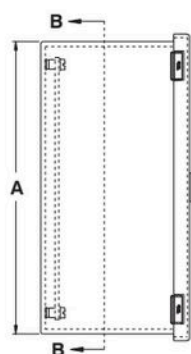

CUSTOMIZE THIS
ENCLOSURE WITH **BOXCAD**
SIZE - COLOR - CUT-OUTS

CATALOG NUMBER	DIMENSIONS							SHIP WGHT LBS.
	A	B	C	D	E	F	G	
1100 W060604	6	6	4	4.88	4.88	5.312	4	4
1100 W080604	8	6	4	6.88	4.88	7.312	4	4
1100 W080804	8	8	4	6.88	6.88	7.312	4	4
1100 W100804	10	8	4	8.88	6.88	9.312	6	7
1100 W101004	10	10	4	8.88	8.88	9.312	8	8
1100 W121004	12	10	4	10.88	8.88	11.31	8	9
1100 W121204	12	12	4	10.88	10.88	11.31	10	11
1100 W141204	14	12	4	12.88	10.88	13.31	10	12
1100 W080606	8	6	6	6.88	4.88	7.312	4	5
1100 W080806	8	8	6	6.88	6.88	7.312	6	7
1100 W100806	10	8	6	8.88	6.88	9.312	6	8
1100 W101006	10	10	6	8.88	8.88	9.312	8	9
1100 W121006	12	10	6	10.88	8.88	11.31	8	11
1100 W121206	12	12	6	10.88	10.88	11.31	10	12
1100 W141206	14	12	6	12.88	10.88	13.31	10	14
1100 W161206	16	12	6	14.88	10.88	15.31	10	16
1100 W121208	12	12	8	10.88	10.88	11.31	10	14
1100 W141208	14	12	8	12.88	10.88	13.31	10	16
1100 W161208	16	12	8	14.88	10.88	15.31	10	17



p.540



p.506



p.592



p.600



p.607



p.628



p.617



186







The **1100 W** are used where the control installation does not require a high degree of protection (such as watertight or dust tight).

CSA Certified / UL Listed / NEMA / EEMAC 1 / IP30

Technical specifications:

- Made of high quality code gauge steel.
- Enclosure comes without inner panel.
- Enclosures are closed with ¼ turn locks.
- Four internal mounting holes are provided.

- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 smooth gray.

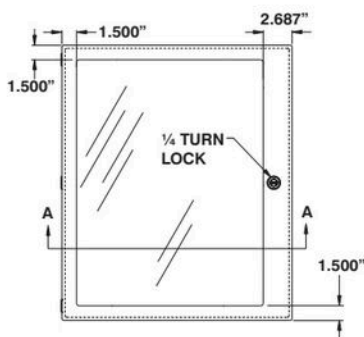

CATALOG NUMBER	DIMENSIONS						BOX & COVER GAUGE	SHIP WGT. LBS.
	A	B	C	Ci	D	E		
1100 W161606	16	16	6.870	6	14	14	16	20
1100 W162006	16	20	6.870	6	14	18	16	25
1100 W201206	20	12	6.870	6	18	10	16	20
1100 W201606	20	16	6.870	6	18	14	16	25
1100 W202006	20	20	6.870	6	18	18	16	30
1100 W241606	24	16	6.870	6	22	14	16	29
1100 W242006	24	20	6.870	6	22	18	16	35
1100 W242406	24	24	6.870	6	22	22	14	49
1100 W302406	30	24	6.870	6	28	22	14	59
1100 W362406	36	24	6.870	6	34	22	14	70
1100 W363006	36	30	6.870	6	34	28	14	85
1100 W201208	20	12	8.870	8	18	10	16	22
1100 W201608	20	16	8.870	8	18	14	16	27
1100 W202008	20	20	8.870	8	18	18	16	32
1100 W242008	24	20	8.870	8	22	18	16	38
1100 W242408	24	24	8.870	8	22	22	14	53
1100 W302008	30	20	8.870	8	28	18	14	55
1100 W302408	30	24	8.870	8	28	22	14	64
1100 W303008	30	30	8.870	8	28	28	14	77
1100 W362408	36	24	8.870	8	34	22	14	75
1100 W363008	36	30	8.870	8	34	28	14	90
1100 W202010	20	20	10.870	10	18	18	16	35
1100 W242010	24	20	10.870	10	22	18	16	41
1100 W302410	30	24	10.870	10	28	22	14	69
1100 W242412	24	24	12.870	12	22	22	14	61
1100 W302412	30	24	12.870	12	28	22	14	73
1100 W363012	36	30	12.870	12	34	28	14	102



Note : The inner pannel must be ordered separately.



p.540



p.506



p.592



p.600



p.607



p.628



p.617