ELECTRICAL DISTRIBUTION


SPLITTER BOXES & TROUGHS EEMAC/NEMA 4X

The **1412 BSS & 1412 TSS** stainless steel splitter boxes are designed for 600 V (max.) service, 3 or 4 wires, in ordinary locations.

CSA Certified / NEMA / EEMAC 4X / IP66

Technical specifications:

- Made of high quality stainless steel.
- Four mounting holes and a screw cover.
- There is a curled lip around all sides to increase rigidity and prevent water from entering the enclosure when it is open.
- There are no knockouts.
- The phenolic insulated splitter blocks are factory installed on an interior panel, which is mounted on welded studs.
- Color: Unpainted and brushed smooth.
- Inner panel is galvanized (other colors available).

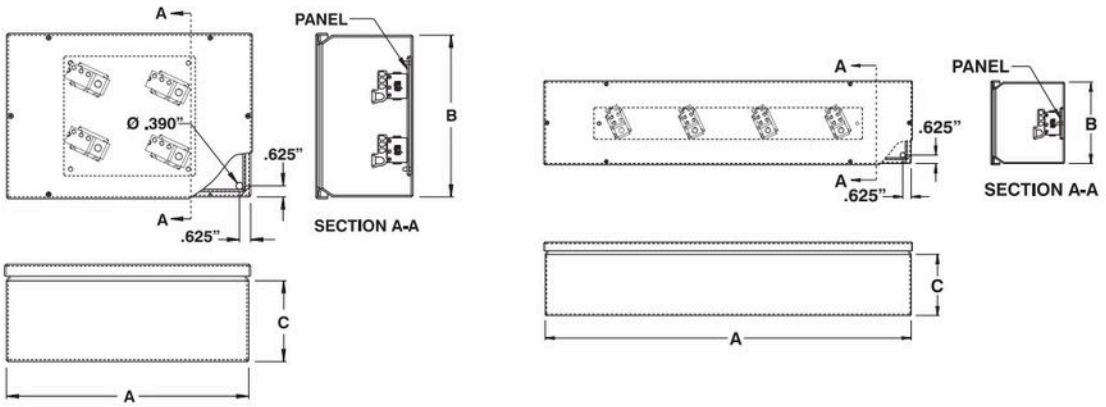

CATALOG NUMBER		MAX AMP.	MAIN LUGS		BRANCH LUGS		DIMENSIONS			SHIP WGHT
3 WIRES	4 WIRES	CU-AL	QTY	WIRES	QTY	WIRES	A	B	C	LBS.
1412 BSS73	1412 BSS74	70	1	2-14	3	2-14	10	10	5	8
1412 BSS103	1412 BSS104	125	1	2/0-14	3	2/0-14	12	12	5	11
1412 BSS203	1412 BSS204	225	1	300MCM-6	3	2/0-14	18	12	6	16
1412 BSS403	1412 BSS404	400	1	600MCM-2	3	600MCM-2	22	20	8	34
1412 BSS603	1412 BSS604	600	2	600MCM-2	2	600MCM-2	26	25	8	49



CATALOG NUMBER		MAX AMP.	MAIN LUGS		BRANCH LUGS		DIMENSIONS			SHIP WGHT
3 WIRES	4 WIRES	CU-AL	QTY	WIRES	QTY	WIRES	A	B	C	LBS.
1412 TSS273	1412 TSS274	70	1	2-14	6	2-14	24	6	5	12
1412 TSS373	1412 TSS374	70	1	2-14	6	2-14	36	6	5	15
1412 TSS473	1412 TSS474	70	1	2-14	6	2-14	48	6	5	20
1412 TSS2103	1412 TSS2104	125	1	1/0-14	6	2-14	24	6	5	12
1412 TSS3103	1412 TSS3104	125	1	1/0-14	6	2-14	36	6	5	15
1412 TSS4103	1412 TSS4104	125	1	1/0-14	6	2-14	48	6	5	20
1412 TSS5103	1412 TSS5104	125	1	1/0-14	6	2-14	60	6	5	24
1412 TSS6103	1412 TSS6104	125	1	1/0-14	6	2-14	72	6	5	28
1412 TSS2203	----------	225	1	300MCM-6	6	2/0-14	24	8	6	19
1412 TSS3203	1412 TSS3204	225	1	300MCM-6	6	2/0-14	36	8	6	26
1412 TSS4203	1412 TSS4204	225	1	300MCM-6	6	2/0-14	48	8	6	32
1412 TSS5203	1412 TSS5204	225	1	300MCM-6	6	2/0-14	60	8	6	40
1412 TSS6203	1412 TSS6204	225	1	300MCM-6	6	2/0-14	72	8	6	46
1412 TSS3403	----------	400	2	250MCM-1/0*	6	4/0-14	36	11	8	34
1412 TSS4403	1412 TSS4404	400	2	250MCM-1/0*	6	4/0-14	48	11	8	42
1412 TSS5403	1412 TSS5404	400	2	250MCM-1/0*	6	4/0-14	60	11	8	50
1412 TSS6403	1412 TSS6404	400	2	250MCM-1/0*	6	4/0-14	72	11	8	59
1412 TSS4603	1412 TSS4604	600	4	250MCM-1/0†	6	4/0-14	48	11	8	42
1412 TSS5603	1412 TSS5604	600	4	250MCM-1/0†	6	4/0-14	60	11	8	50
1412 TSS6603	1412 TSS6604	600	4	250MCM-1/0†	6	4/0-14	72	11	8	59



* OR 1 x 600MCM-2 † OR 2 x 600MCM-2 For 4 wire systems, add 1 lb to weight.



p.628 p.628 p.592 p.225 p.600

DATA SUBJECT TO CHANGE WITHOUT NOTICE.