




STAINLESS STEEL HINGED WIRING TROUGHS (BOLT-ON FEET)

The **1412 CHSS** stainless steel hinged cover oil and dust tight troughs are used indoors or outdoors, in corrosive environments or where the troughs may be subject to hosing or water coming from any direction, or for protection against dust, dirt or oil splashing.

CSA Certified / UL Listed / NEMA / EEMAC 4-12 / IP66

Technical specifications:

- Made of high quality 304 stainless steel #4, with continuously welded corner seams.
- The opening has a flange around all sides to increase rigidity and ensure complete contact with the poured in place gasket.
- The troughs has die cast hinges, with stainless steel pins.
- Troughs are closed with ¼ turn locks.
- Seamless gasket ensures a complete and durable water tight seal.
- Enclosure comes complete without a galvanized inner panel.
- Removable mounting feet included.

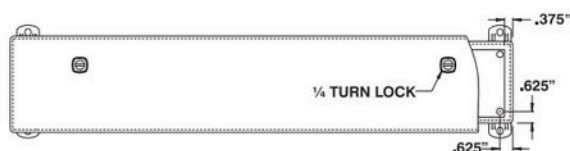

CATALOG NUMBER	DIMENSIONS			SHIP WGHT LBS.
	A	B	C	
1412 CHSS020212	2.5	2.5	12	3
1412 CHSS020218	2.5	2.5	18	5
1412 CHSS020224	2.5	2.5	24	6
1412 CHSS020230	2.5	2.5	30	9
1412 CHSS020236	2.5	2.5	36	10
1412 CHSS020248	2.5	2.5	48	13
1412 CHSS020260	2.5	2.5	60	16
1412 CHSS020272	2.5	2.5	72	19
1412 CHSS040412	4	4	12	6
1412 CHSS040418	4	4	18	8
1412 CHSS040424	4	4	24	10
1412 CHSS040430	4	4	30	13
1412 CHSS040436	4	4	36	16
1412 CHSS040448	4	4	48	20
1412 CHSS040460	4	4	60	25
1412 CHSS040472	4	4	72	30
1412 CHSS060612	6	6	12	9
1412 CHSS060618	6	6	18	12
1412 CHSS060624	6	6	24	16
1412 CHSS060630	6	6	30	19
1412 CHSS060636	6	6	36	23
1412 CHSS060648	6	6	48	29
1412 CHSS060660	6	6	60	32
1412 CHSS060672	6	6	72	43
1412 CHSS080812	8	8	12	11
1412 CHSS080824	8	8	12	15
1412 CHSS080836	8	8	36	19
1412 CHSS080848	8	8	48	33
1412 CHSS080860	8	8	60	41
1412 CHSS121224	12	12	24	34
1412 CHSS121236	12	12	36	49
1412 CHSS121248	12	12	48	60
1412 CHSS121260	12	12	60	73



p.592



p.592



p.617






STAINLESS STEEL HINGED WIRING TROUGHS (BOLT-ON FEET)

The 1412 CHSS...IP (no inner panel) stainless steel hinged cover oil and dust tight troughs are used indoors or outdoors, in corrosive environments or where the troughs may be subject to hosing or water coming from any direction, or for protection against dust, dirt or oil splashing.

CSA Certified / UL Listed / NEMA / EEMAC 4-12 / IP66

Technical specifications:

- Made of high quality 304 stainless steel #4, with continuously welded corner seams.
- The opening has a flange around all sides to increase rigidity and ensure complete contact with the poured in place gasket.
- The troughs has die cast hinges, with stainless steel pins.
- Troughs are closed with ¼ turn locks.
- Seamless gasket ensures a complete and durable water tight seal.
- Enclosure comes complete with a galvanized inner panel.
- Removable mounting feet included.

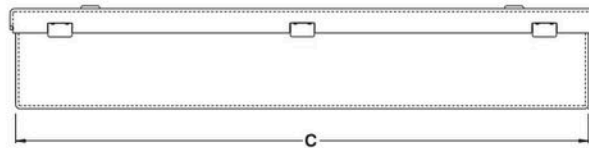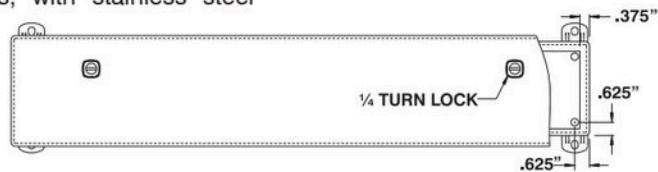

CATALOG NUMBER	DIMENSIONS					SHIP WT LBS.
	A	B	C	D	E	
1412 CHSS060424IP	6	4	24	21.88	2.88	12
1412 CHSS060436IP	6	4	36	33.88	2.88	18
1412 CHSS060448IP	6	4	48	45.88	2.88	23
1412 CHSS060460IP	6	4	60	57.88	2.88	29
1412 CHSS060472IP	6	4	72	69.88	2.88	34
1412 CHSS060612IP	6	6	12	9.88	4.88	8
1412 CHSS060618IP	6	6	18	15.88	4.88	12
1412 CHSS060624IP	6	6	24	21.88	4.88	15
1412 CHSS060630IP	6	6	30	27.88	4.88	19
1412 CHSS060636IP	6	6	36	33.88	4.88	22
1412 CHSS060648IP	6	6	48	45.88	4.88	29
1412 CHSS060660IP	6	6	60	57.88	4.88	36
1412 CHSS060672IP	6	6	72	69.88	4.88	42
1412 CHSS080524IP	8	5	24	21.88	3.88	16
1412 CHSS080536IP	8	5	36	33.88	3.88	23
1412 CHSS080548IP	8	5	48	45.88	3.88	30
1412 CHSS080560IP	8	5	60	57.88	3.88	37
1412 CHSS080572IP	8	5	72	69.88	3.88	44
1412 CHSS080812IP	8	8	12	9.88	6.88	12
1412 CHSS080824IP	8	8	24	21.88	6.88	21
1412 CHSS080836IP	8	8	36	33.88	6.88	30
1412 CHSS080848IP	8	8	48	45.88	6.88	38
1412 CHSS080860IP	8	8	60	57.88	6.88	47
1412 CHSS100636IP	10	6	36	33.88	4.88	28
1412 CHSS100648IP	10	6	48	45.88	4.88	36
1412 CHSS100660IP	10	6	60	57.88	4.88	45
1412 CHSS100672IP	10	6	72	69.88	4.88	53
1412 CHSS121224IP	12	12	24	21.88	10.88	32
1412 CHSS121236IP	12	12	36	33.88	10.88	46
1412 CHSS121248IP	12	12	48	45.88	10.88	59
1412 CHSS121260IP	12	12	60	57.88	10.88	72



p.592

