

OIL & DUST TIGHT STANDARD PUSHBUTTON ENCLOSURES

The 1412 SD - 1412 ED - 1412 EL - 1412 MN - 1412 SF - oil and dust tight pushbutton enclosures are built to provide protection against dirt, dust and oil, for all brands of oil tight push-buttons, switches and pilot lights.



CSA Certified / UL Listed
NEMA/EEMAC 4-12 / IP66

Technical specifications:

- 6 types of enclosures, which are listed on the following pages.
- Made of high quality 16 GA steel, with all seams continuously

- welded.
- A high quality, seamless gasket, which is poured in place, ensures a complete and durable seal of the enclosure.
- Screws are captive to the cover, and the enclosure features a closed-end rivet nut to ensure a perfect seal.
- Enclosure can be internally or externally mounted using the included die cast wall mounting feet.
- Feet have oblong holes to facilitate installation.


- Hole plugs (880 HP series) are available to seal unused holes.
- Available with blank covers.
- Enclosures come with a galvanized interior panel.
- Enclosures are finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Boxes are ANSI/ASA 61 smooth gray.
- Inner panel is galvanized (other colors available).

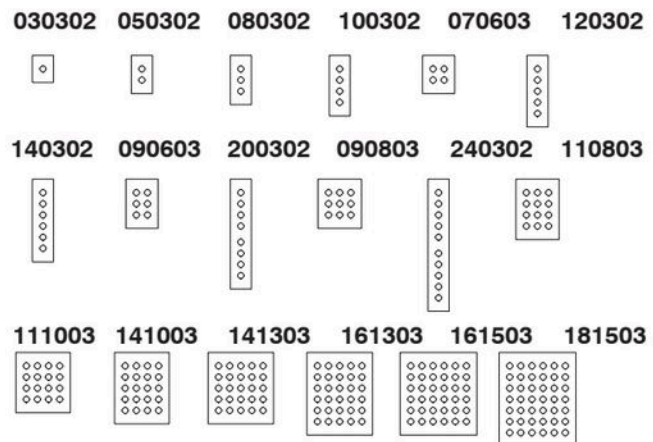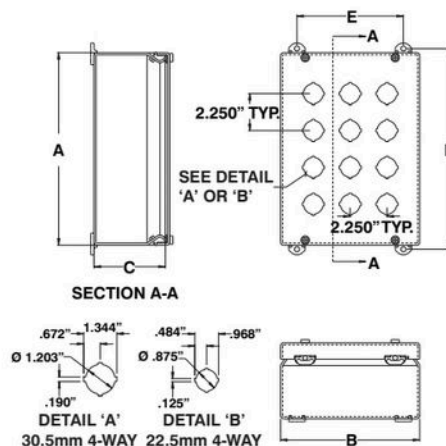


CATALOG NUMBER	QTY. HOLES	DIMENSIONS					SHIP WTG LBS.
		A	B	C	D	E	
1412 SD030302	1	4.000	3.500	3.000	4.500	2.375	1
1412 SD050302	2	6.250	3.500	3.000	6.750	2.375	2
1412 SD080302	3	8.500	3.500	3.000	9.000	2.375	3
1412 SD100302	4	10.750	3.500	3.000	11.250	2.375	4
1412 SD070603	4	7.750	6.500	3.000	8.250	5.375	4
1412 SD120302	5	13.000	3.500	3.000	13.500	2.375	5
1412 SD140302	6	15.250	3.500	3.000	15.750	2.375	6
1412 SD090603	6	10.000	6.500	3.000	10.500	5.375	5
1412 SD200302	8	20.750	3.500	3.000	21.250	2.375	7
1412 SD090803	9	10.000	8.750	3.000	10.500	7.625	7
1412 SD240302	10	25.250	3.500	3.000	25.750	2.375	8
1412 SD110803	12	12.250	8.750	3.000	12.750	7.625	8
1412 SD111003	16	12.250	11.000	3.000	12.750	9.875	9
1412 SD141003	20	14.500	11.000	3.000	15.000	9.875	11
1412 SD141303	25	14.500	13.250	3.000	15.000	12.125	13
1412 SD161303	30	16.750	13.250	3.000	17.250	12.125	14
1412 SD161503	36	16.750	15.500	3.000	16.250	14.375	16
1412 SD181503	42	19.000	15.500	3.000	19.500	14.375	18

Notes :

- Enclosures are also available with blank covers, add prefix 'C' to the catalog number (i.e. 1412 SDC070603).
- Enclosures are also available with 22.5mm pushbutton holes, add suffix 'MN' to the catalog number (i.e. 1412 SD070603MN).

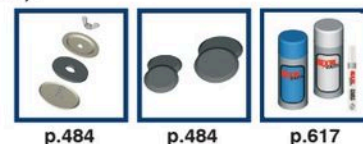

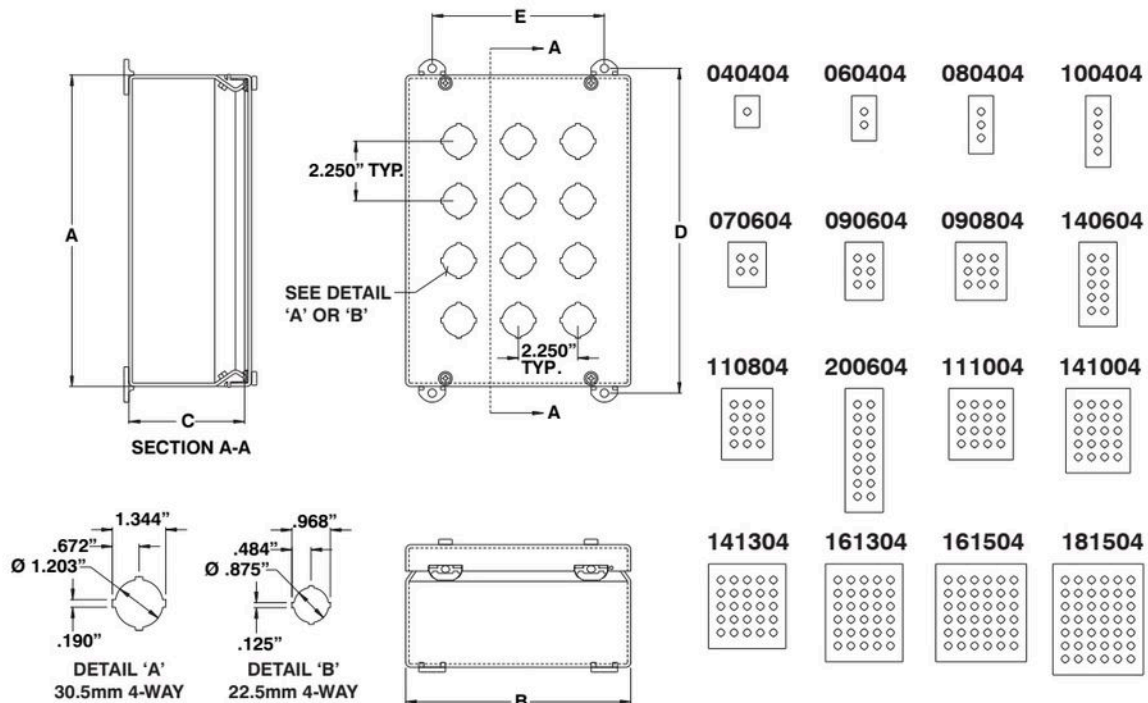

CATALOG NUMBER	QTY. HOLES	DIMENSIONS					SHIP WGT LBS.
		A	B	C	D	E	
1412 ED040404	1	4.500	4.250	4.750	5.000	2.875	3
1412 ED060404	2	6.500	4.250	4.750	7.000	2.875	4
1412 ED080404	3	8.500	4.250	4.750	9.000	2.875	5
1412 ED100404	4	10.500	4.250	4.750	11.000	2.875	6
1412 ED070604	4	7.750	6.500	4.750	8.250	5.125	5
1412 ED090604	6	10.000	6.500	4.750	10.500	5.125	6
1412 ED090804	9	10.000	8.750	4.750	10.500	7.375	7
1412 ED140604	10	14.500	6.500	4.750	15.000	5.125	9
1412 ED110804	12	12.250	8.750	4.750	12.750	7.375	9
1412 ED200604	16	21.250	6.500	4.750	21.750	5.125	10
1412 ED111004	16	12.250	11.000	4.750	12.750	9.625	10
1412 ED141004	20	14.500	11.000	4.750	15.000	9.625	13
1412 ED141304	25	14.500	13.250	4.750	15.000	11.875	14
1412 ED161304	30	16.750	13.250	4.750	17.250	11.875	15
1412 ED161504	36	16.750	15.500	4.750	17.250	14.125	16
1412 ED181504	42	18.750	15.500	4.750	19.250	14.125	18

Notes :

- Enclosures are also available with blank covers, add prefix 'C' to the catalog number (i.e. 1412 EDC080404).
- Enclosures are also available with welded mounting feet, add suffix 'MF' to the catalog number (i.e. 1412 ED070603MF).
- Enclosures are also available with 22.5mm pushbutton holes, add suffix 'MN' to the catalog number (i.e. 1412 ED080404MN).



p.484



p.484



p.617



Optional welded mounting feet

