

STANDARD STAINLESS STEEL PUSHBUTTON ENCLOSURES

The **1412 SDSS** oil and dust tight pushbutton enclosures are built to provide protection against corrosion, dirt, dust and oil, for all brands of oil tight pushbuttons, switches and pilot lights.

CSA Certified / UL Listed / NEMA / EEMAC 4X / IP66


Technical specifications:

- Made of high quality stainless steel, with all seams continuously welded.
- Seamless gasket, which is poured in place, ensures a complete and durable seal of the enclosure.
- Screws are captive to the cover, and the enclosure features a closed-end rivet nut to ensure a perfect seal.
- Wall mounting feet are included with these enclosures.
- Exterior are unpainted and brushed smooth #4 finish.


030302




050302




080302




100302





090603



090803



110803

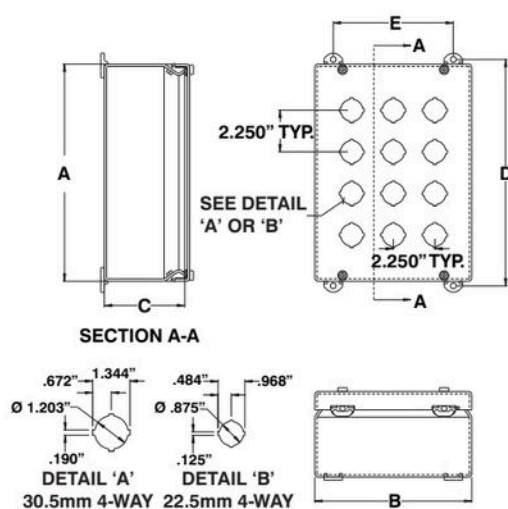

Optional welded stainless steel mounting feet

CATALOG NUMBER	QTY. HOLES	DIMENSIONS					SHIP WGHT LBS.
		A	B	C	D	E	
1412 SDSS030302	1	4.000	3.500	3.000	4.500	2.375	1
1412 SDSS050302	2	6.250	3.500	3.000	6.750	2.375	2
1412 SDSS080302	3	8.500	3.500	3.000	9.000	2.375	3
1412 SDSS100302	4	10.750	3.500	3.000	11.250	2.375	4
1412 SDSS090603	6	10.000	6.500	3.000	10.500	5.375	5
1412 SDSS090803	9	10.000	8.750	3.000	10.500	7.625	7
1412 SDSS110803	12	12.250	8.750	3.000	12.750	7.625	8

Notes :

- For stainless steel Type 316, add suffix '6' to the catalog number (i.e. 1412 SDSS0303026).
- Enclosures are also available with welded mounting feet, add suffix 'MF' to the catalog number (i.e. 1412 SDSS070603MF).
- Enclosures are also available with 22.5mm pushbutton holes, add suffix 'MN' to the catalog number (i.e. 1412 SD030302MN).
- For painted stainless steel, add suffix 'P' to the catalog number (i.e. 1412 SDSS...P).



p.484



p.484