



SPLITTER BOXES & TROUGHS EEMAC/NEMA 4X

The 1412 BSSP & TSSP powder coated stainless steel troughs are designed for 600 V (max.) service, 3 or 4 wires, in ordinary locations.

CSA Certified / NEMA / EEMAC 4X / IP66

Technical specifications:

- Made of high quality stainless steel.
- They have four mounting holes and a screw cover.
- There is a curled lip around all sides to increase rigidity and prevent water from entering the enclosure when it is open.
- There are no knockouts.
- The phenolic insulated splitter blocks are factory installed on an interior panel, which is mounted on welded studs.
- The enclosure's exterior is powder coated ANSI/ASA 61 smooth gray.
- Inner panel is galvanized (other colors available).

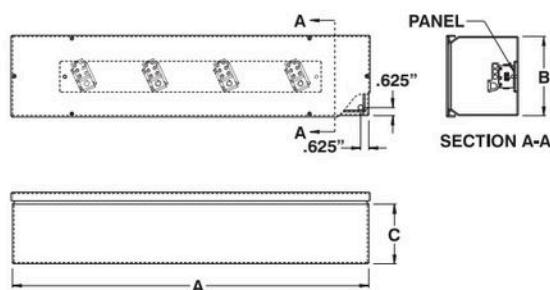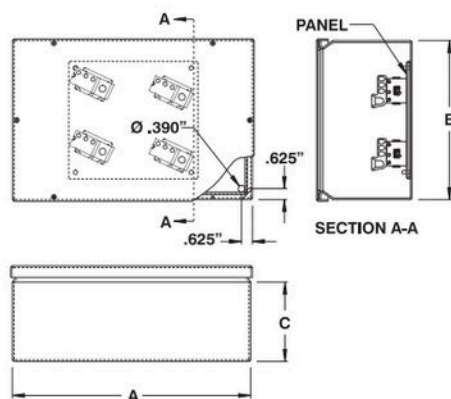

CATALOG NUMBER		MAX AMP. CU-AL	MAIN LUGS		BRANCH LUGS		DIMENSIONS			SHIP WGHT LBS.
3 WIRES	4 WIRES		QTY	WIRES	QTY	WIRES	A	B	C	
1412 BSSP73	1412 BSSP74	70	1	2-14	3	2-14	10	10	5	8
1412 BSSP103	1412 BSSP104	125	1	2/0-14	3	2/0-14	12	12	5	11
1412 BSSP203	1412 BSSP204	225	1	300MCM-6	3	2/0-14	18	12	6	16
1412 BSSP403	1412 BSSP404	400	1	600MCM-2	3	600MCM-2	22	20	8	34
1412 BSSP603	1412 BSSP604	600	2	600MCM-2	2	600MCM-2	26	25	8	49

CATALOG NUMBER		MAX AMP. CU-AL	MAIN LUGS		BRANCH LUGS		DIMENSIONS			SHIP WGHT LBS.
3 WIRES	4 WIRES		QTY	WIRES	QTY	WIRES	A	B	C	
1412 TSSP273	1412 TSSP274	70	1	2-14	6	2-14	24	6	5	12
1412 TSSP373	1412 TSSP374	70	1	2-14	6	2-14	36	6	5	15
1412 TSSP473	1412 TSSP474	70	1	2-14	6	2-14	48	6	5	20
1412 TSSP2103	1412 TSSP2104	125	1	1/0-14	6	2-14	24	6	5	12
1412 TSSP3103	1412 TSSP3104	125	1	1/0-14	6	2-14	36	6	5	15
1412 TSSP4103	1412 TSSP4104	125	1	1/0-14	6	2-14	48	6	5	20
1412 TSSP5103	1412 TSSP5104	125	1	1/0-14	6	2-14	60	6	5	24
1412 TSSP6103	1412 TSSP6104	125	1	1/0-14	6	2-14	72	6	5	28
1412 TSSP2203	-----	225	1	300MCM-6	6	2/0-14	24	8	6	19
1412 TSSP3203	1412 TSSP3204	225	1	300MCM-6	6	2/0-14	36	8	6	26
1412 TSSP4203	1412 TSSP4204	225	1	300MCM-6	6	2/0-14	48	8	6	32
1412 TSSP5203	1412 TSSP5204	225	1	300MCM-6	6	2/0-14	60	8	6	40
1412 TSSP6203	1412 TSSP6204	225	1	300MCM-6	6	2/0-14	72	8	6	46
1412 TSSP3403	-----	400	2	250MCM-1/0*	6	4/0-14	36	11	8	34
1412 TSSP4403	1412 TSSP4404	400	2	250MCM-1/0*	6	4/0-14	48	11	8	42
1412 TSSP5403	1412 TSSP5404	400	2	250MCM-1/0*	6	4/0-14	60	11	8	50
1412 TSSP6403	1412 TSSP6404	400	2	250MCM-1/0*	6	4/0-14	72	11	8	59
1412 TSSP4603	1412 TSSP4604	600	4	250MCM-1/0†	6	4/0-14	48	11	8	42
1412 TSSP5603	1412 TSSP5604	600	4	250MCM-1/0†	6	4/0-14	60	11	8	50
1412 TSSP6603	1412 TSSP6604	600	4	250MCM-1/0†	6	4/0-14	72	11	8	59

* OR 1 x 600MCM-2

† OR 2 x 600MCM-2

For 4 wire systems, add 1 lb to weight.

