

OIL & DUST TIGHT STRAIGHT PEDESTALS, ANGLED PEDESTALS & BASES

The 1500 PE straight pedestals, **1500 PEA** angled pedestals and **1500 BA** bases are used to floor mount 1500 CS/CSD/CSE consolets or other types of enclosures.

Technical specifications:

- Wiring can be pulled through the base or the pedestal column (a cutout must be made on the consolet).
- Wires can also be pulled directly into the consolet.
- Inside flanges and sealing gaskets are provided.
- Seamless gasket, which is poured in place, secures the access cover and the box connector.
- Made of 14 GA steel and the base is made of 11 GA steel with reinforcements.
- Leveling screws and holes to bolt the components to the floor are provided.
- Pedestals and bases are finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Finish is ANSI/ASA 61 smooth

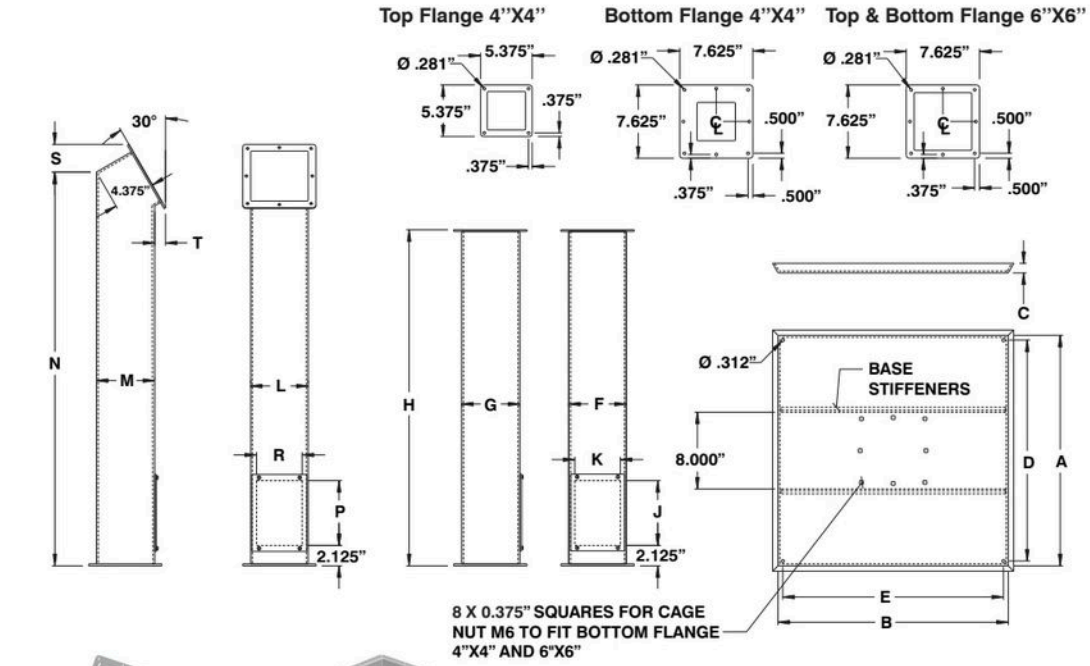

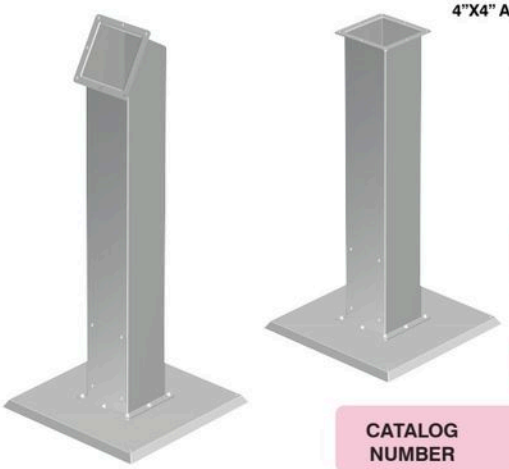

CATALOG NUMBER	DIMENSIONS A	B	C	D	E	SHIP WGHT LBS.
1500 BA181801	18	18	1.000	17.000	17.000	20
1500 BA242401	24	24	1.000	22.500	22.500	47

CATALOG NUMBER	DIMENSIONS F	G	H	J	K	SHIP WGHT LBS.
1500 PE040435	4	4	35	6.000	2.750	18
1500 PE060635	6	6	35	6.750	4.750	24
1500 PE040448	4	4	48	6.000	2.750	26
1500 PE060648	6	6	48	6.750	4.750	32

CATALOG NUMBER	DIMENSIONS L	M	N	P	R	S	T	SHIP WGHT LBS.
1500 PEA040441	4	4	41	6.000	2.750	2.750	2.062	20
1500 PEA060641	6	6	41	6.750	4.750	2.875	1.125	27



p.617