
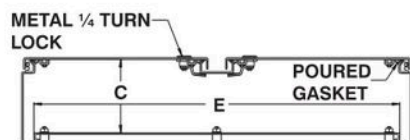


The **5412 ESDD** (double door) water, oil & dust tight enclosures are used indoors or outdoors in areas where the enclosures may be subject to hosing or water coming from any direction, or for protection against dust, dirt or oil splashing.


CSA Certified / UL Listed / NEMA / EEMAC 4-12 / IP66

Technical specifications:


- Made of high quality steel, with continuously welded corner seams.
- Opening has a flat lip around all sides to increase rigidity and prevent dripping water from entering the enclosure when the cover is opened.
- Seamless gasket ensures a complete and durable water tight seal.
- The enclosure has die cast hinges, with stainless steel captive pins.
- Enclosures are closed with 1/4 turn locks.
- Internal mounting holes are provided.
- Enclosures comes complete with a galvanized inner panel.
- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 smooth gray.

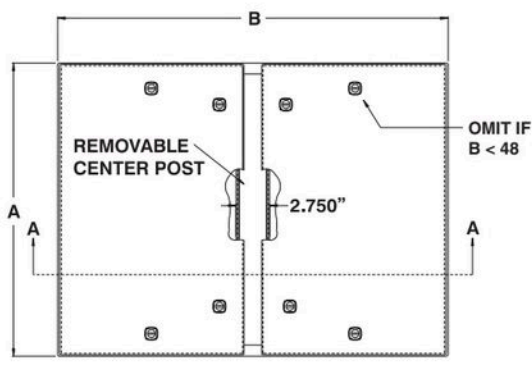

SECTION A-A

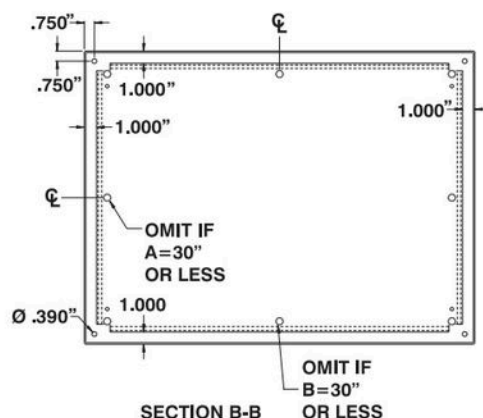

CATALOG NUMBER	DIMENSIONS							SHIP WGHT LBS.
	A	B	C	D	E	F	G	
5412 ESDD244208	24	42	8	22	40	25.25	36	117
5412 ESDD244808	24	48	8	22	46	25.25	42	130
5412 ESDD544208	54	42	8	52	40	55.25	36	272
5412 ESDD244210	24	42	10	22	40	25.25	36	150
5412 ESDD304210	30	42	10	28	40	31.25	36	152
5412 ESDD304810	30	48	10	28	46	31.25	42	168
5412 ESDD306010	30	60	10	28	58	31.25	54	203
5412 ESDD364212	36	42	12	34	40	37.25	36	220
5412 ESDD364812	36	48	12	34	46	37.25	42	242
5412 ESDD366012	36	60	12	34	58	37.25	54	292
5412 ESDD424212	42	42	12	40	40	43.25	36	197
5412 ESDD424812	42	48	12	40	46	43.25	42	216
5412 ESDD426012	42	60	12	40	58	43.25	54	349
5412 ESDD484812	48	48	12	46	46	49.25	42	225



Insulated box? To have your enclosure insulated, add suffix "TH"

i.e.: 5412 ESDD244208TH → Insulated steel enclosure