

NEMA 4X ENCLOSURES

5412 ESSP


WATER, OIL & DUST TIGHT STAINLESS STEEL ENCLOSURES

The **5412 ESSP** water, oil & dust tight enclosures are used indoors or outdoors, in areas where a corrosion problem exists or where the enclosures may be subject to hosing or water coming from any direction, or for protection against dust, dirt or oil splashing.

CSA Certified / UL Listed / NEMA / EEMAC 4X / IP66

Technical specifications:

- Made of high quality 304 stainless steel, with continuously welded corner seams.
- Opening has a flat lip around all sides to increase rigidity and prevent dripping water from entering the enclosure when the cover is opened.
- Seamless gasket ensures a complete and durable water tight seal.
- The enclosure has stainless steel hinges, with stainless steel captive pins.
- Enclosures are closed with ¼ turn locks (or 3 point latch system on larger enclosures).
- Internal mounting holes are provided.
- Enclosures comes complete with a galvanized inner panel.
- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : Brushed stainless steel

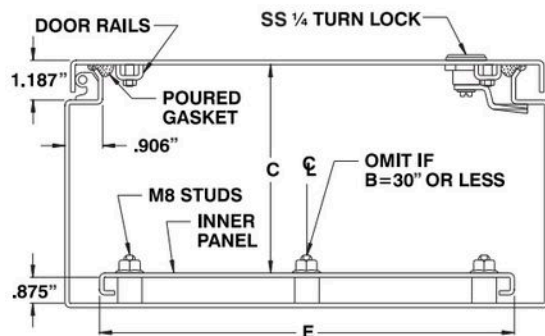


CATALOG NUMBER	DIMENSIONS					SHIP WGHT LBS.
	A	B	C	D	E	
5412 ESSP121206	12	12	6	10	10	19
5412 ESSP122406	12	24	6	10	22	35
5412 ESSP161206	16	12	6	14	10	24
5412 ESSP161606	16	16	6	14	14	31
5412 ESSP162006	16	20	6	14	18	37
5412 ESSP201206	20	12	6	18	10	29
5412 ESSP201606	20	16	6	18	14	37
5412 ESSP202006	20	20	6	18	18	45
5412 ESSP202406	20	24	6	18	22	53
5412 ESSP241206	24	12	6	22	10	35
5412 ESSP241606	24	16	6	22	14	44
5412 ESSP242006	24	20	6	22	18	53
5412 ESSP242406	24	24	6	22	22	62
5412 ESSP301606	30	16	6	28	14	53
5412 ESSP302006	30	20	6	28	18	65
5412 ESSP302406	30	24	6	28	22	76
5412 ESSP362406	36	24	6	34	22	90
5412 ESSP363006	36	30	6	34	28	109
5412 ESSP122408	12	24	8	10	22	38
5412 ESSP161208	16	12	8	14	10	27
5412 ESSP161608	16	16	8	14	14	34
5412 ESSP162008	16	20	8	14	18	41
5412 ESSP201208	20	12	8	18	10	33
5412 ESSP201608	20	16	8	18	14	41
5412 ESSP202008	20	20	8	18	18	49
5412 ESSP202408	20	24	8	18	22	57
5412 ESSP241208	24	12	8	22	10	38
5412 ESSP241608	24	16	8	22	14	48
5412 ESSP242008	24	20	8	22	18	57
5412 ESSP242408	24	24	8	22	22	67
5412 ESSP243008	24	30	8	22	28	81
5412 ESSP301208	30	12	8	28	10	46
5412 ESSP301608	30	16	8	28	14	58
5412 ESSP302008	30	20	8	28	18	70
5412 ESSP302408	30	24	8	28	22	81
5412 ESSP303008	30	30	8	28	28	98
5412 ESSP303608	30	36	8	28	34	116
5412 ESSP362408	36	24	8	34	22	95
5412 ESSP363008	36	30	8	34	28	116
5412 ESSP363608	36	36	8	34	34	136
5412 ESSP422408	42	24	8	40	22	110
5412 ESSP423008	42	30	8	40	28	133



372



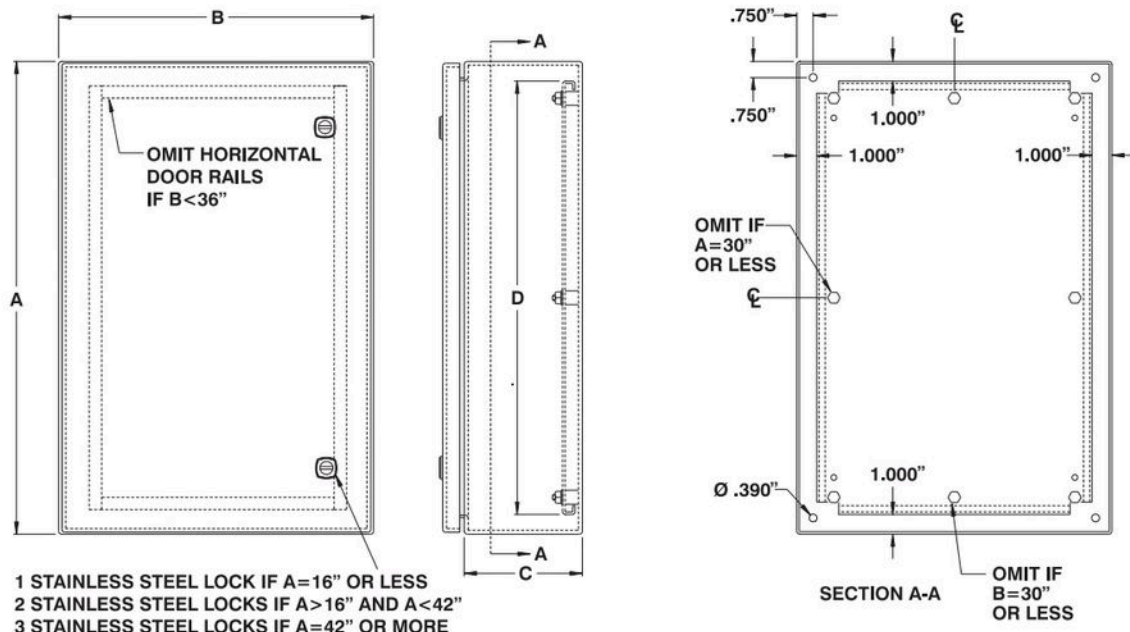

CATALOG NUMBER	DIMENSIONS					POIDS EN LBS.
	A	B	C	D	E	
5412 ESSP423608	42	36	8	40	34	156
5412 ESSP482408	48	24	8	46	22	124
5412 ESSP483008	48	30	8	46	28	150
5412 ESSP483608	48	36	8	46	34	177
5412 ESSP603608	60	36	8	58	34	218
5412 ESSP161210	16	12	10	14	10	30
5412 ESSP201610	20	16	10	18	14	44
5412 ESSP202010	20	20	10	18	18	53
5412 ESSP241210	24	12	10	22	10	42
5412 ESSP242010	24	20	10	22	18	62
5412 ESSP242410	24	24	10	22	22	71
5412 ESSP302010	30	20	10	28	18	74
5412 ESSP302410	30	24	10	28	22	86
5412 ESSP303010	30	30	10	28	28	100
5412 ESSP362410	36	24	10	34	22	101
5412 ESSP363010	36	30	10	34	28	122
5412 ESSP423010	42	30	10	40	28	140
5412 ESSP423610	42	36	10	40	34	164
5412 ESSP483010	48	30	10	46	28	158
5412 ESSP483610	48	36	10	46	34	185
5412 ESSP603610	60	36	10	58	34	227
5412 ESSP201612	20	16	12	18	14	48
5412 ESSP202012	20	20	12	18	18	57
5412 ESSP202412	20	24	12	18	22	66
5412 ESSP242012	24	20	12	22	18	66
5412 ESSP242412	24	24	12	22	22	76
5412 ESSP302412	30	24	12	28	22	92
5412 ESSP303012	30	30	12	28	28	110
5412 ESSP362412	36	24	12	34	22	107

CATALOG NUMBER	DIMENSIONS					SHIP WTGHT LBS.
	A	B	C	D	E	
5412 ESSP363012	36	30	12	34	28	129
5412 ESSP363612	36	36	12	34	34	150
5412 ESSP422412	42	24	12	40	22	118
5412 ESSP423012	42	30	12	40	28	147
5412 ESSP423612	42	36	12	40	34	172
5412 ESSP482412	48	24	12	46	22	138
5412 ESSP483612	48	36	12	46	34	193
5412 ESSP602412	60	24	12	58	22	169
5412 ESSP603612	60	36	12	58	34	236
5412 ESSP723012	72	30	12	70	28	240
5412 ESSP723612	72	36	12	70	34	279
5412 ESSP242016	24	20	16	22	18	74
5412 ESSP242416	24	24	16	22	22	86
5412 ESSP302416	30	24	16	28	22	102
5412 ESSP362416	36	24	16	34	22	119
5412 ESSP363016	36	30	16	34	28	142
5412 ESSP423616	42	36	16	40	34	187
5412 ESSP483616	48	36	16	46	34	210
5412 ESSP603616	60	36	16	58	14	255
5412 ESSP723016	72	30	16	70	28	260
5412 ESSP723616	72	36	16	70	34	301
5412 ESSP302420	30	24	20	28	22	113
5412 ESSP363020	36	30	20	34	28	155
5412 ESSP483620	48	36	20	46	34	226
5412 ESSP603620	60	36	20	58	34	274
5412 ESSP723020	72	30	20	70	28	280
5412 ESSP302424	30	24	24	28	22	123
5412 ESSP723024	72	30	24	70	28	300

Insulated box?

To have your enclosure insulated, add suffix "TH"

i.e.: 5412 ESSP362412TH ← Insulated stainless steel enclosure

EXM
exm.

CUSTOMIZE IT
BOX CAD

373